
FED. SUP CLASS
2805

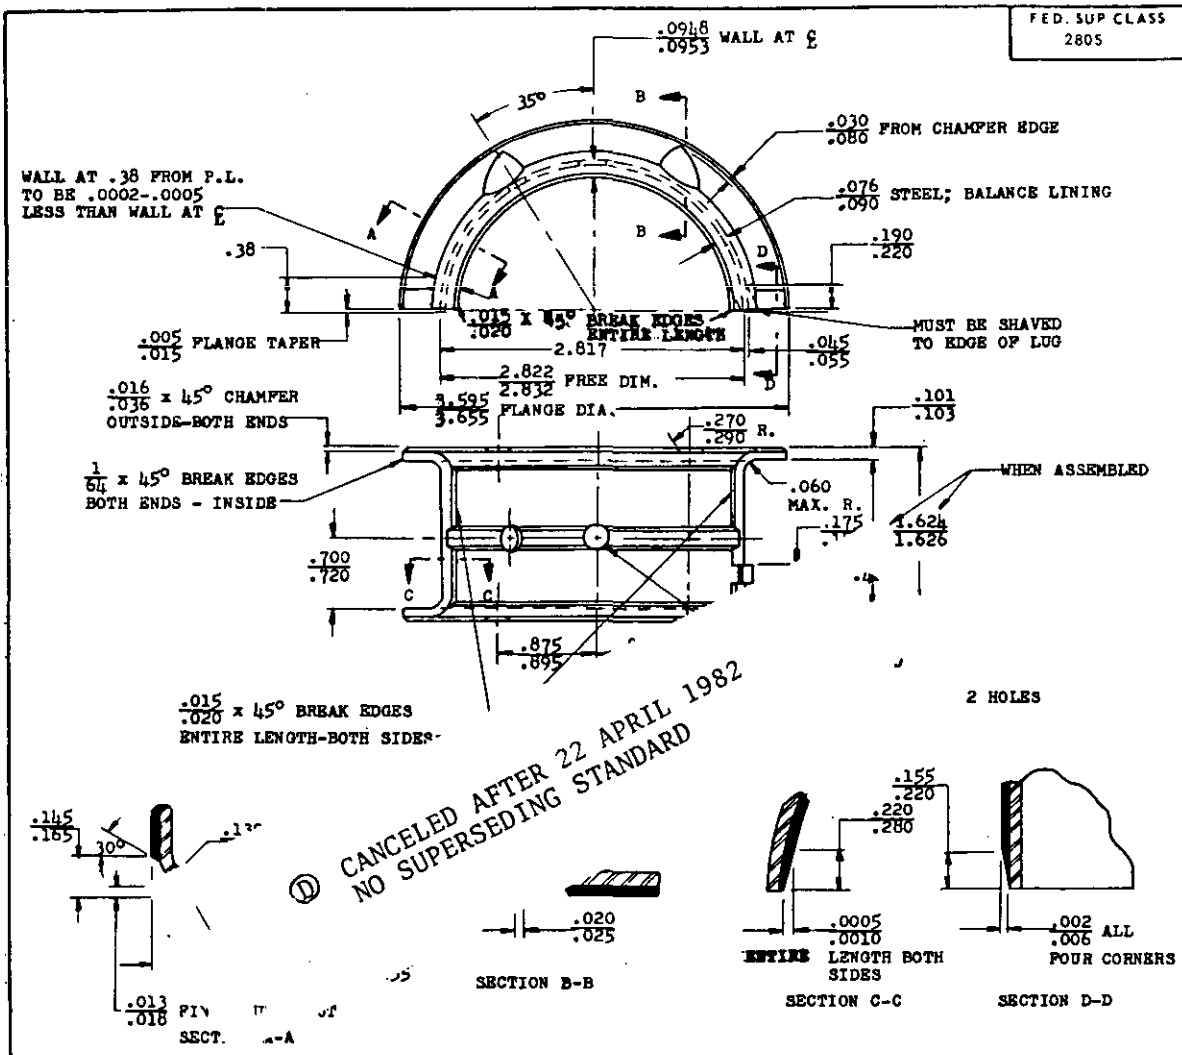


Ⓓ CANCELED AFTER 22 APRIL 1982
NO SUPERSEDING STANDARD

NOTES:

1. MATERIAL: COPPER-LEAD LINING, S.A.E. NO. 49 ON STEEL, S.A.E. NO. 1008, OR 1010
2. PLATING: LEAD-TIN PLATE I.D. (6% MIN. TIN) TO A THICKNESS .001 NOMINAL. FLASH-TIN ALL OVER AFTER LEAD-TIN PLATE (OPTIONAL ON FLANGED FACES)
3. IN 2.817 DIA. INSPECTION BLOCK WITH ONE PARTING LINE FACE AGAINST A STOP AT HORIZONTAL CENTER LINE OF BLOCK AND A PRESSURE OF 2195 LBS. ON OTHER P.L. FACE, HEIGHT WILL BE 1.409-1.410 ON SIDE OPPOSITE STOP.
4. REMOVE ALL BURRS.
5. MS PART NUMBER AND PART MANUFACTURER'S IDENTIFICATION TO BE CLEARLY MARKED WITHOUT INTERFERING WITH THE FUNCTION OF THE PART.
6. TOLERANCES: UNLESS OTHERWISE SPECIFIED, LINEAR MACHINED DIMENSIONS ±.010: ANGULAR MACHINED DIMENSIONS ±30'. DO NOT SCALE DRAWING.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
9. ALL DIMENSIONS IN INCHES.

Ⓒ ENTIRE STANDARD REVISED

| | | |
|---|---|---|
| P.A. ARMY MD(ENGR)<br>Other Cust<br>A.F. - 69<br>NAVY - YD | TITLE<br>BEARING, SLEEVE: ENGINE, FLANGED, 2-5/8" X 1-5/8" | PART NO. MS 13967-1<br>MILITARY STANDARD<br>MS 13967 |
| PROCUREMENT SPECIFICATION<br>MIL-E-11275 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : YD, ATAC

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 19 JUNE 1952 REVISED Ⓐ 27 NOVEMBER 1958 Ⓑ 24 OCTOBER 1955 Ⓒ 7 MAR 1966 Ⓓ 22 APRIL 1982

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:31Z
Check the source to verify that this is the current version before use.