


FED. SUP CLASS
5935

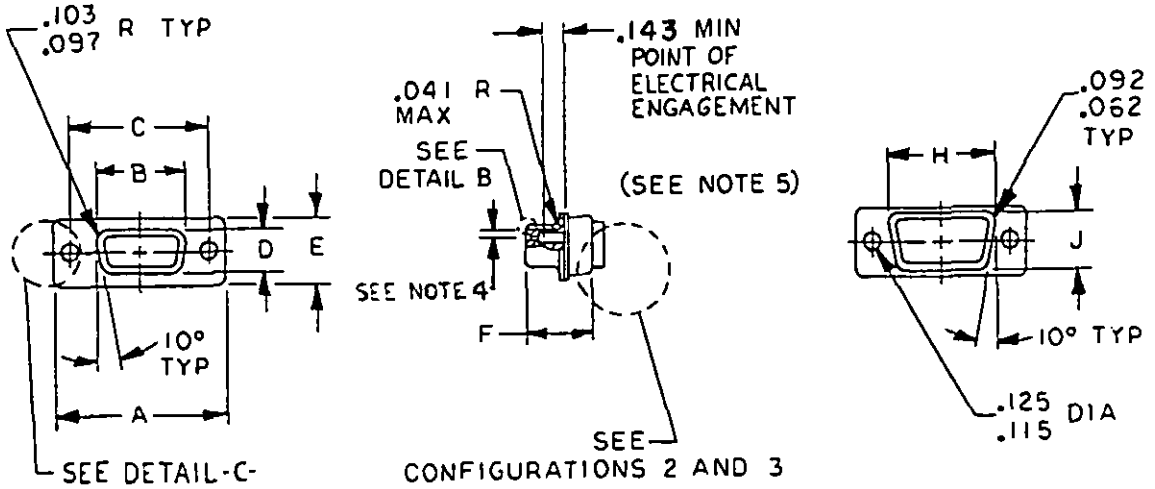

ENGAGING VIEW




DETAIL -A-



DETAIL -A-
(ALTERNATE)


CONFIGURATION 1

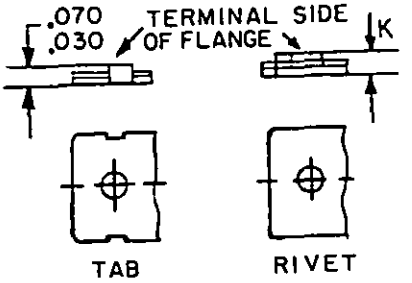


DETAIL -C-

ALTERNATE METHODS
OF SECURING SHELL-HALVES

TERMINAL VIEW



DETAIL -B-

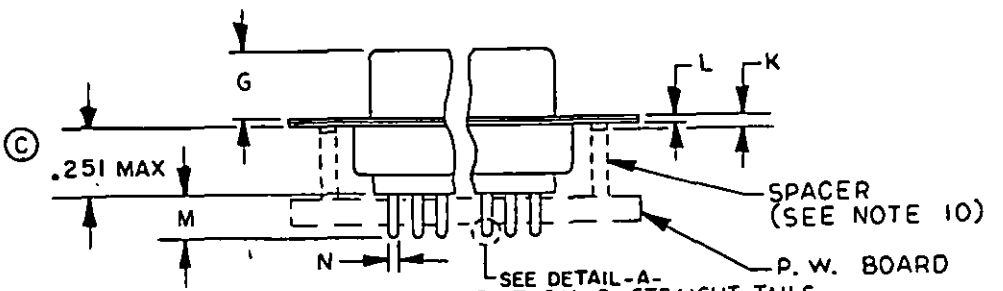

CONFIGURATION 2-STRAIGHT TAILS

(C) DENOTES CHANGE

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International Interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, RECEPTACLE, SOCKET CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS14058
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 1 OF 6

DD FORM 1 MAY 73 672 AMSC N/A

(Coordinated) reproduction of this form is authorized.

5935-3608-01

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 13 JUN 73 REVISED (A) 12 OCT 73 (B) 5 DEC 83 (C) 26 JAN 89


User activities: Army - ME
Navy - MC, CG, SH
Air Force - 11, 99

Review activities: Army - MI
Navy - AS
Air Force
DLA-ES


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5935

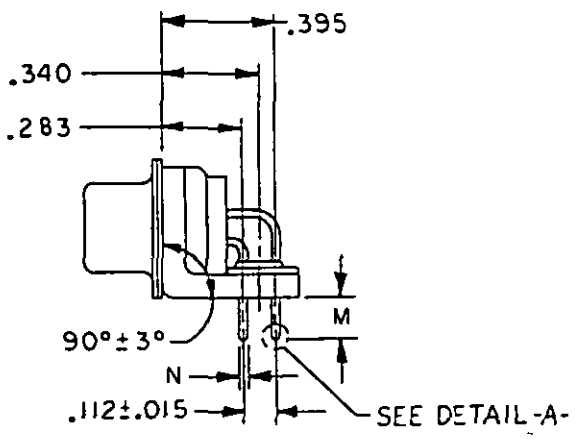

SHELL SIZE 1, 2, 3 AND 4

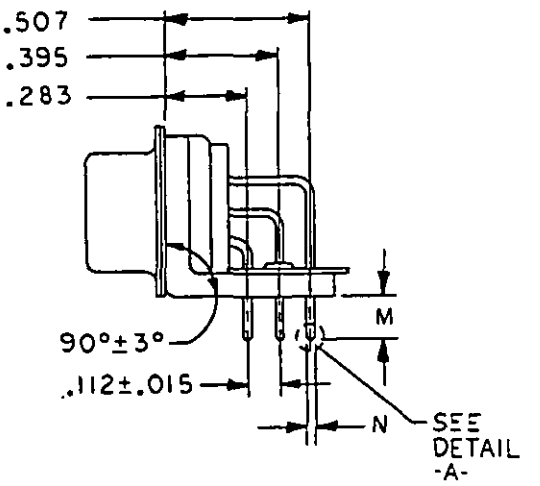

SHELL SIZE 5

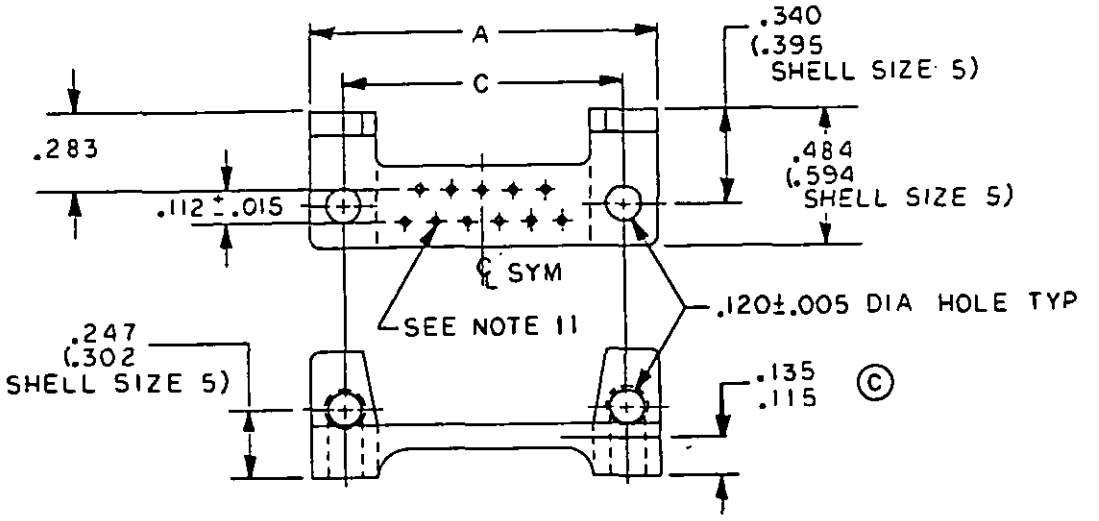

90° MOUNTING BRACKET



SHELL SIZE 1, 2, 3 AND 4

SHELL SIZE 5

ALTERNATE CONFIGURATION OF REAR INSERT & MOUNTING BRACKET

CONFIGURATION 3 - RIGHT ANGLE TAILS

REVISED © FOR CHANGES SEE PAGES 1, 2, 3, AND 5

APPROVED 13 JUN 73

User activities: Army - ME
Navy - MC, CG, SH
Air Force -


Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A NAVY-EC Other Cust AF-85 ARMY-CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, RECEPTACLE, SOCKET CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS14058
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 2 OF 6

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

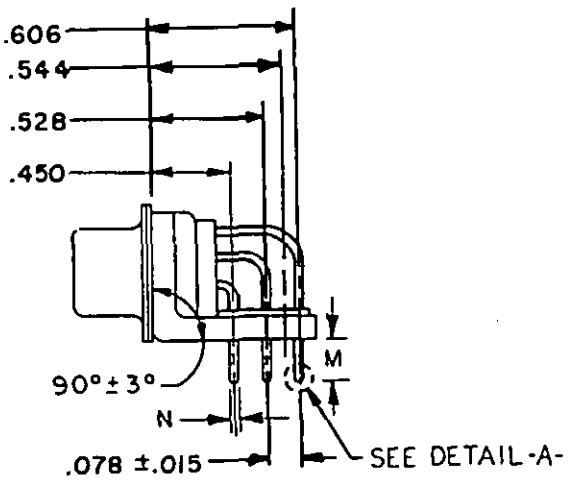

SHELL SIZE 1, 2, 3 AND 4

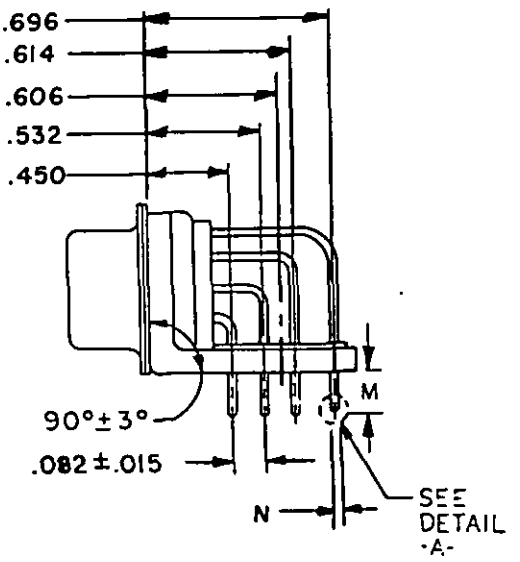

SHELL SIZE 5

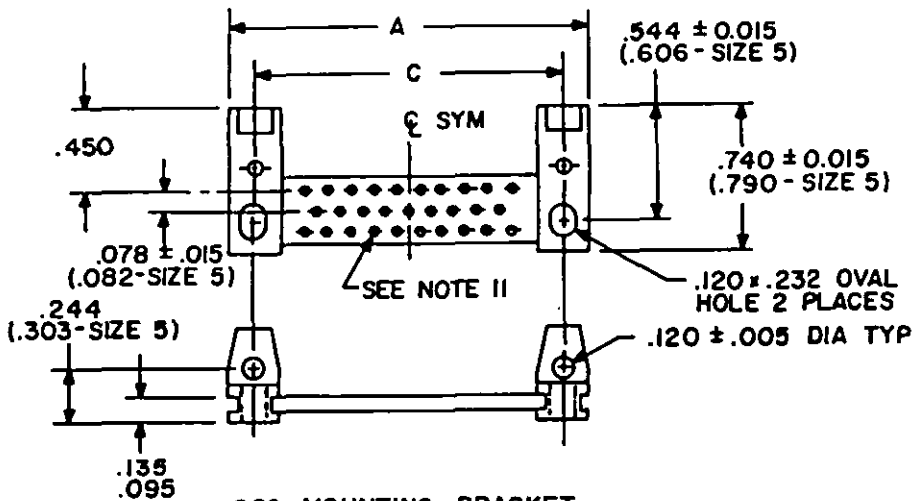

90° MOUNTING BRACKET

CONFIGURATION 4 - RIGHT ANGLE TAILS

REVISED © FOR CHANGES SEE PAGES 1, 2, 3, AND 5

APPROVED 13 JUN 73

User activities: Army - ME
Navy - MC, CG, SH
Air Force

Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, RECEPTACLE, SOCKET CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS14058
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 3 OF 6

DD FORM 1 MAY 73 672 (Coordinated previous editions of this form are obsolete.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA- ES

User activities: Army - ME
Navy - MC, CG, SH
Air Force -

P.A NAVY-EC
Other Cust AF-85 ARMY-CR
Procurement Specification MIL-C-24308
International interest

SUPERSEDES:

TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, RECEPTACLE, SOCKET CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES

MILITARY STANDARD

MS14058

PAGE 4 OF 6

FED. SUP CLASS 5935

DD FORM 1 MAY 73 672

TABLE I. Dimensions and configuration.

MS no. 14058	Tails	Shell size	A	B	C	D	E	F	G	H	J	K	L
-61, -67 -1, -7, -13, -19, -25, -31, -37, -43, -49, -55 -73	Straight Right angle	1	1.228 (31.19) 1.198 (30.43)	.648 (16.46) .638 (16.21)	.989 (25.12) .979 (24.87)	.316 (8.03) .306 (7.77)	.509 (12.93) .479 (12.17)	.439 (11.15) .419 (10.64)	.248 (6.30) .238 (6.05)	.769 (19.53) .749 (19.02)	.432 (10.97) .412 (10.46)	.060 (1.52) .035 (0.89)	.040 (1.02) .020 (0.51)
-62, -68 -2, -8 -14, -20, -26, -32, -38, -44, -50, -56 -74	Straight Right angle	2	1.556 (39.52) 1.526 (38.76)	.976 (24.79) .966 (24.54)	1.317 (33.45) 1.307 (33.20)	.316 (8.03) .306 (7.77)	.509 (12.93) .479 (12.17)	.439 (11.15) .419 (10.64)	.248 (6.30) .238 (6.05)	1.093 (27.76) 1.073 (27.25)	.432 (10.97) .412 (10.46)	.060 (1.52) .035 (0.89)	.040 (1.02) .020 (0.51)
-63, -69 -3, -9 -15, -21 -75, -27, -33, -39, -45, -51, -57	Straight Right angle	3	2.103 (53.42) 2.073 (52.65)	1.516 (38.51) 1.506 (38.25)	1.857 (47.17) 1.847 (46.91)	.316 (8.03) .306 (7.77)	.509 (12.93) .479 (12.17)	.439 (11.15) .419 (10.64)	.248 (6.30) .238 (6.05)	1.635 (41.53) 1.615 (41.02)	.432 (10.97) .412 (10.46)	.060 (1.52) .035 (0.89)	.040 (1.02) .020 (0.51)
-64, -70 -4, -10 -16, -22, -28, -34 -40, -46 -52, -58 -76	Straight Right angle	4	2.744 (69.70) 2.714 (68.94)	2.164 (54.97) 2.154 (54.71)	2.505 (63.63) 2.495 (63.37)	.316 (8.03) .306 (7.77)	.509 (12.93) .479 (12.17)	.439 (11.15) .419 (10.64)	.248 (6.30) .238 (6.05)	2.282 (57.96) 2.262 (57.45)	.432 (10.97) .412 (10.46)	.060 (1.52) .035 (0.89)	.040 (1.02) .020 (0.51)
-65, -71 -5, -11, -17, -23, -29, -35, -41, -47 -53, -59 -77	Straight Right angle	5	2.650 (67.31) 2.620 (66.55)	2.069 (52.55) 2.059 (52.30)	2.411 (61.24) 2.401 (60.99)	.428 (10.87) .418 (10.62)	.620 (15.75) .590 (14.00)	.439 (11.15) .419 (10.64)	.248 (6.30) .238 (6.05)	2.188 (55.58) 2.168 (55.07)	.544 (13.82) .524 (13.31)	.060 (1.52) .035 (0.89)	.040 (1.02) .020 (0.51)

©

APPROVED 13 JUN 73

REVISED © FOR CHANGES SEE PAGES 1, 2, 3, AND 5

Source: https://assist.dla.mil. Downloaded on 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

TABLE II. Application data and dimensions.

MS no. 14058	Applicable configurations	Applicable board thickness	Nominal pin diameter	M	N
-1 thru -5	1 and 2	.094 (2.39 mm)	.030 (0.76 mm)	.185 (4.70 mm) .130 (3.30 mm)	.033 (0.84 mm) .027 (0.69 mm)
-7 thru -11	1 and 2	.125 (3.18 mm)	.030 (0.76 mm)	.210 (5.33 mm) .155 (3.94 mm)	.033 (0.84 mm) .027 (0.69 mm)
-13 thru -17	1 and 2	.094 (2.39 mm)	.040 (1.02 mm)	.185 (4.70 mm) .130 (3.30 mm)	.043 (1.09 mm) .037 (0.94 mm)
-19 thru -23	1 and 2	.125 (3.18 mm)	.030 (0.76 mm)	.210 (5.33 mm) .155 (3.94 mm)	.043 (1.09 mm) .037 (0.94 mm)
-25 thru -29	1 and 3	.062 (1.57 mm)	.030 (0.76 mm)	.154 (3.91 mm) .099 (2.51 mm)	.033 (0.84 mm) .027 (0.69 mm)
-31 thru -35	1 and 3	.094 (2.39 mm)	.030 (0.76 mm)	.185 (4.70 mm) .130 (3.30 mm)	.033 (0.84 mm) .027 (0.69 mm)
-37 thru -41	1 and 3	.062 (1.57 mm)	.040 (1.02 mm)	.154 (3.91 mm) .099 (2.51 mm)	.043 (1.09 mm) .037 (0.94 mm)
-43 thru -47	1 and 3	.094 (2.39 mm)	.040 (1.02 mm)	.185 (4.70 mm) .130 (3.30 mm)	.043 (1.09 mm) .037 (0.94 mm)
-49 thru -53	1 and 3	.125 (3.18 mm)	.030 (0.76 mm)	.210 (5.33 mm) .155 (3.94 mm)	.033 (0.84 mm) .027 (0.69 mm)
-55 thru -59	1 and 3	.125 (3.18 mm)	.040 (1.02 mm)	.210 (5.33 mm) .155 (3.94 mm)	.043 (1.09 mm) .037 (0.94 mm)
-61 thru -65	1 and 2	.094 (2.39 mm)	.020 (0.51 mm)	.185 (4.70 mm) .130 (3.30 mm)	.023 (0.58 mm) .017 (0.43 mm)
-67 thru -71	1 and 2	.125 (3.18 mm)	.020 (0.51 mm)	.320 (8.13 mm) .275 (6.99 mm)	.023 (0.58 mm) .017 (0.43 mm)
-73 thru -77	1 and 4	.062 (1.57 mm)	.020 (0.51 mm)	.154 (3.91 mm) .099 (2.51 mm)	.023 (0.58 mm) .017 (0.43 mm)

User activities: Army - ME
Navy - MC, CG, SH
Air Force -

Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.092	2.34	.247	6.27
.010	0.25	.097	2.46	.251	6.38
.015	0.38	.103	2.62	.283	7.19
.030	0.76	.112	2.84	.302	7.67
.040	1.02	.115	2.92	.340	8.64
.041	1.04	.120	3.05	.395	10.03
.062	1.57	.125	3.18	.484	12.29
.065	1.65	.135	3.43	.507	12.88
.070	1.78	.149	3.78	.594	15.09

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only.
4. Socket contact shall accommodate .041/.039 inch (1.04/0.99 mm) diameter pin.
5. Point of electrical engagement. Use .0393/ .0390 (1.00/0.99 mm) diameter square ended test pin.
6. Applicable insert patterns: MS18273-1, MS18274-1, MS18275-1, MS18276-1 and MS18277-1.
7. Copyright notice. All information disclosed in this military standard which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the expressed permission of the copyright owner.
8. The 90° bracket shall be one piece flame resistant glass-filled nylon, polyester or two piece metal and nylon of which the metal pieces shall be coated with a material in accordance with MIL-I-46058.
9. The 90° bracket shall be furnished as an integral part of the connector assembly.
10. (C) Spacers will be supplied with connectors (not attached to the connector).
11. Layout shown for reference only to locate C_L of hole pattern. See applicable insert arrangement.
12. Requirement for contact retention shall be 3.5 lbs. for right angle printed circuit board mount connectors. Connectors may be fastened to board for test.
13. Unless otherwise specified, tolerance is ±.010 inch (0.25 mm).
14. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
15. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

APPROVED 13 JUN 73 REVISED (C) FOR CHANGES SEE PAGES 1, 2, 3, AND 5

User activities: Army - ME
Navy - MC, CG, SH
Air Force -

Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International Interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, RECEPTACLE, SOCKET CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS14058
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 6 OF 6

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.