INCH-POUND

MS21000A
2 April 2013
SUPERSEDING
MS21000
29 July 1953

DETAILED SPECIFICATION SHEET

PIN – FLATHEAD, HI – SHEAR, OVERSIZE, 160,000 PSI

INACTIVE FOR NEW DESIGN AFTER 6 JUNE 1966.

This specification sheet is approved for all Departments and Agencies of the Department of Defense.

The requirements for acquiring the described herein shall consist of this specification sheet.

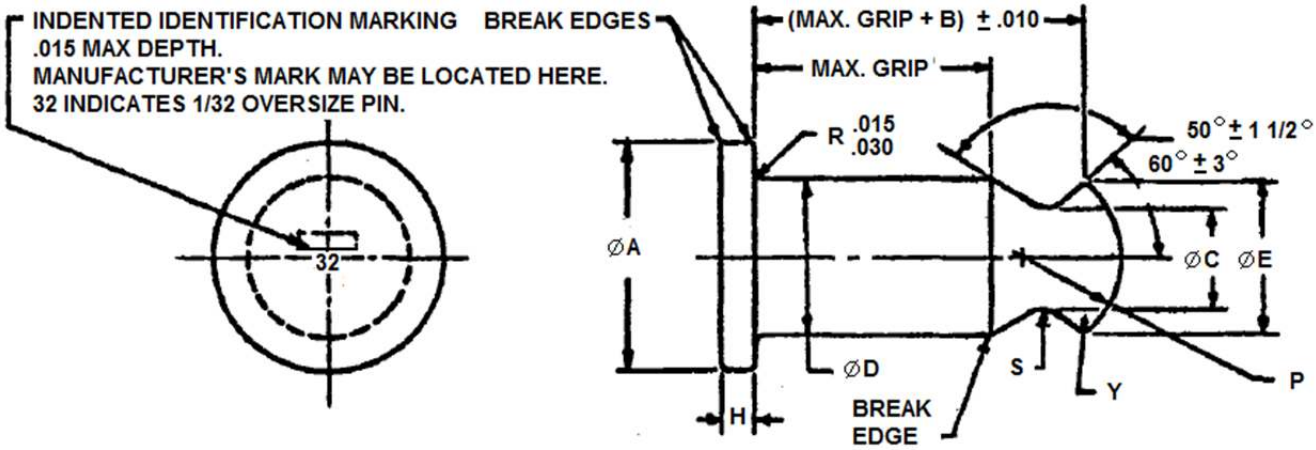


FIGURE 1. PIN - FLATHEAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

NOMINAL DIAMETER	ØA	B	ØC (a).	ØD	ØE (a).	H	P SPHER RAD	S RAD	Y MAX RAD
.218 (7/32)	.315 .295	.125	.119 .115	.2197 .2156	.185 .181	.055 .045	.128 .118	.034 .030	.0075
.281 (9/32)	.412 .387	.165	.156 .152	.2822 .2811	.245 .241	.069 .059	.167 .155	.044 .040	.0075
.343 (11/32)	.505 .475	.206	.194 .189	.3447 .3436	.307 .302	.078 .068	.206 .194	.054 .050	.0075
.406 (13/32)	.600 .565	.248	.232 .227	.4072 .4061	.370 .365	.088 .078	.250 .237	.066 .062	.0075
.468 (15/32)	.676 .641	.289	.270 .265	.4697 .4686	.430 .425	.105 .093	.295 .280	.077 .073	.0125
.531 (17/32)	.770 .735	.330	.308 .303	.5322 .5311	.493 .488	.115 .103	.337 .322	.089 .085	.0125

TABLE II. Max. Grip Length and Dash Numbers.

NOM. DIA.	Max. Grip Length and Dash Numbers. (b)													
	.187 (3/16)	.250 (1/4)	.312 (5/16)	.375 (3/8)	.437 (7/16)	.500 (1/2)	.562 (9/16)	.625 (5/8)	.687 (11/16)	.750 (3/4)	.812 (13/16)	.875 (7/8)	.937 (15/16)	1.000
.218 (7/32)	7-3	7-4	7-5	7-6	7-7	7-8	7-9	7-10	7-11	7-12	7-13	7-14	7-15	7-16
.281 (9/32)		9-4	9-5	9-6	9-7	9-8	9-9	9-10	9-11	9-12	9-13	9-14	9-15	9-16
.343 (11/32)			11-5	11-6	11-7	11-8	11-9	11-10	11-11	11-12	11-13	11-14	11-15	11-16
.406 (13/32)				13-6	13-7	13-8	13-9	13-10	13-11	13-12	13-13	13-14	13-15	13-16
.468 (15/32)					15-7	15-8	15-9	15-10	15-11	15-12	15-13	15-14	15-15	15-16
.531 (17/32)						17-8	17-9	17-10	17-11	17-12	17-13	17-14	17-15	17-16

(a) “C” and “E” shall be concentric with “D” within .004 total runout for.218 (7/32), .281 (9/32), .343 (11/32) and .406 (13/32); within .005 for.468 (15/32) and .531 (17/32) sizes.

(b) For pins within grip length in excess of 1 inch, code second dash number indicates max grip in .062 (1/16) increments.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Steel, Spec. SAE AMS6320, AMS6322, AMS6325, AMS6327, AMS6346, AMS6348, AMS6349, AMS6370, AMS6382 and AMS6528.

2. Heat Treat: 160,000 to 180,000 PSI, Spec. SAE AMS-H-6875.

3. Finish: Cadmium Plate, Spec. SAE AMS-QQ-P-416, Type I, Class 3.

4. Roughness of surfaces outside of max grip shall not exceed 80 RMS micro inches measured before plating.

5. Roughness of surfaces within max grip shall not exceed 60 RMS micro inches measured before plating.

6. Head and shank to be concentric within .010 full indicator reading.

7. Examples of Part Number: MS21000-9-14 = .281 (9/32) Dia., .875 (7/8) Max grip length.
   MS21000-9-19 = .281 (9/32) Dia., 1.187 (1-3/16) Max grip length.

8. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Air Force – 99
DLA - IS

Preparing Activity:
DLA - IS

(Project 5320-2013-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.