


FED. SUP CLASS
5935

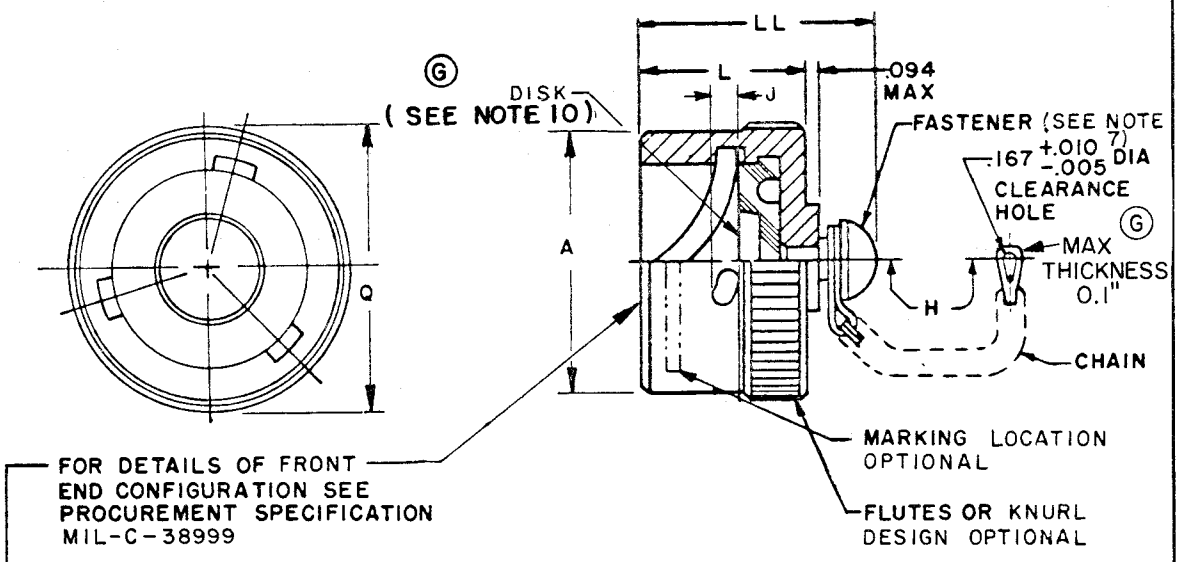

STYLE C

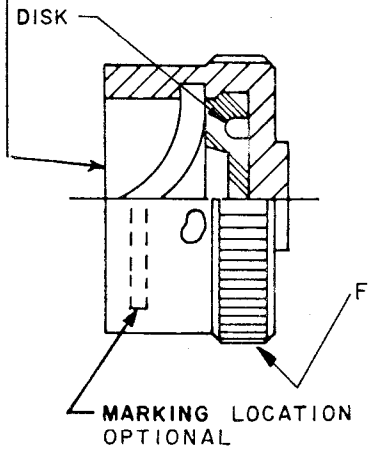

STYLE A

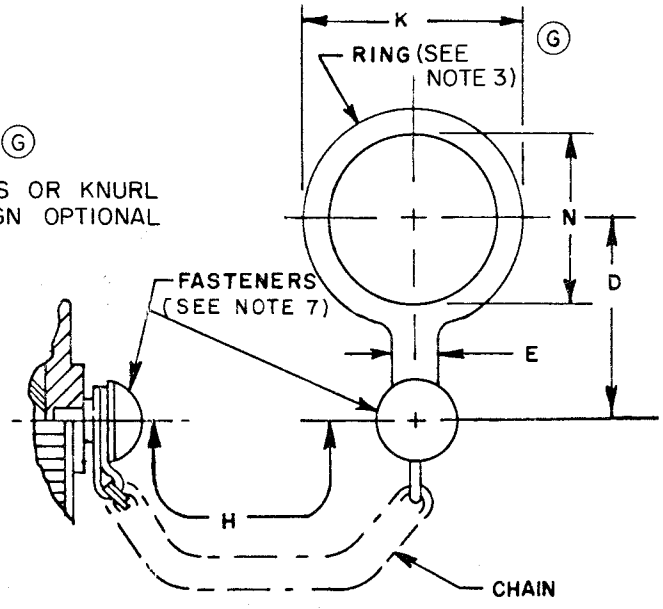

STYLE N

G REDRAWN

APPROVED 8 MAR 68 REVISED G 5 OCT 84

User activities: Army - Navy - Air Force -

Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A AF-85 Other Cust ARMY-CR NAVY-AS	International interest	TITLE G COVER, ELECTRICAL CONNECTOR, PROTECTIVE, RECEPTACLE, BAYONET COUPLING, SERIES I	MILITARY STANDARD MS27502
Procurement Specification MIL-C-38999		SUPERSEDES: MS27502(USAF)	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3418-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5935

A Max Dia	Q Max Dia	Shell size	D MAX	D MIN	H +.50 -.25 Std. chain length	L Max	LL Max	E Min Ring throat	K Max Dia	N Min Dia	J ±.015
.82	.86	9	1.03	.71	3.0				1.03	.70	
.94	.98	11	1.13	.74					1.21	.84	
1.10	1.16	13	1.23	.93					1.40	1.01	
1.22	1.28	15	1.29	.99	3.5				1.60	1.14	.105
1.34	1.41	17	1.35	1.05		.82	1.1	.23	1.70	1.26	
1.46	1.52	19	1.41	1.11					1.80	1.39	
1.58	1.65	21	1.47	1.18					1.92	1.51	
1.70	1.77	23	1.54	1.24	4.0				2.10	1.64	
1.83	1.89	25	1.60	1.30					2.20	1.76	.138

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	0.13	.74	18.8	1.13	28.7	1.39	35.3	1.77	45.0
.010	0.25	.82	20.8	1.14	29.0	1.40	35.6	1.80	45.7
.015	0.38	.84	21.3	1.16	29.5	1.41	35.8	1.83	46.5
.030	0.76	.86	21.8	1.18	30.0	1.46	37.1	1.89	48.0
.094	2.39	.93	23.6	1.21	30.7	1.47	37.3	1.92	48.7
0.1	2.5	.94	23.9	1.22	31.0	1.51	38.4	2.10	53.3
.105	2.67	.98	24.9	1.23	31.2	1.52	38.6	2.20	55.9
.138	3.51	.99	25.1	1.24	31.5	1.54	39.1	3.0	76.2
.167	4.24	1.01	25.7	1.26	32.0	1.58	40.1	3.5	88.9
.23	5.8	1.03	26.2	1.28	32.5	1.60	40.6	4.0	101.6
.25	6.4	1.05	26.7	1.29	32.8	1.64	41.7		
.50	12.7	1.10	27.9	1.30	33.0	1.65	41.9		
.70	17.8	1.1	28.0	1.34	34.0	1.70	43.2		
.71	18.0	1.11	28.2	1.35	34.3	1.76	44.7		

Ⓖ

EXAMPLE OF PART NUMBER

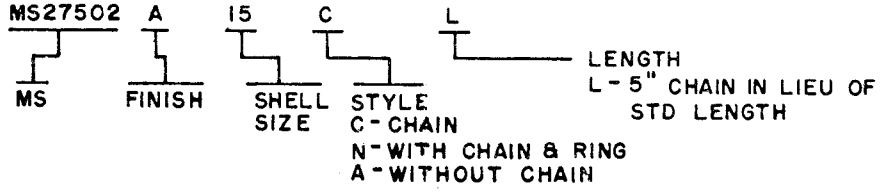

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
Ⓖ 3. Material - Cover: Impact extruded or machined aluminum alloy.
Disk: Silicone elastomer.
Ring: Stainless steel, passivated, .030 maximum thickness.
Chain: Stainless steel, passivated, conforming to RR-C-271, type II, class 3.
Fastener: Stainless steel, passivated.
4. Finish - See MIL-C-38999.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.
Ⓖ 7. The chain shall rotate freely on the cover fastener.
8. Applicable connectors: MIL-C-27599 series I and MIL-C-38999 series I.
9. Fastener tensile strength shall be 5 pounds.
Ⓖ 10. Disk shall be bonded or mechanically retained.

P.A AF-85 Other Cust ARMY-CR NAVY-AS	International interest	TITLE Ⓖ COVER, ELECTRICAL CONNECTOR, PROTECTIVE, RECEPTACLE BAYONET COUPLING, SERIES I	MILITARY STANDARD MS27502
Procurement Specification MIL-C-38999		SUPERSEDES: MS27502(USAF)	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

User activities: Army - Navy - Air Force -

Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA-ES

Ⓖ FOR CHANGES SEE SHEETS 1 & 2

REVISED

APPROVED 8 MAR 68

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.