FED. SUP CLASS
1660

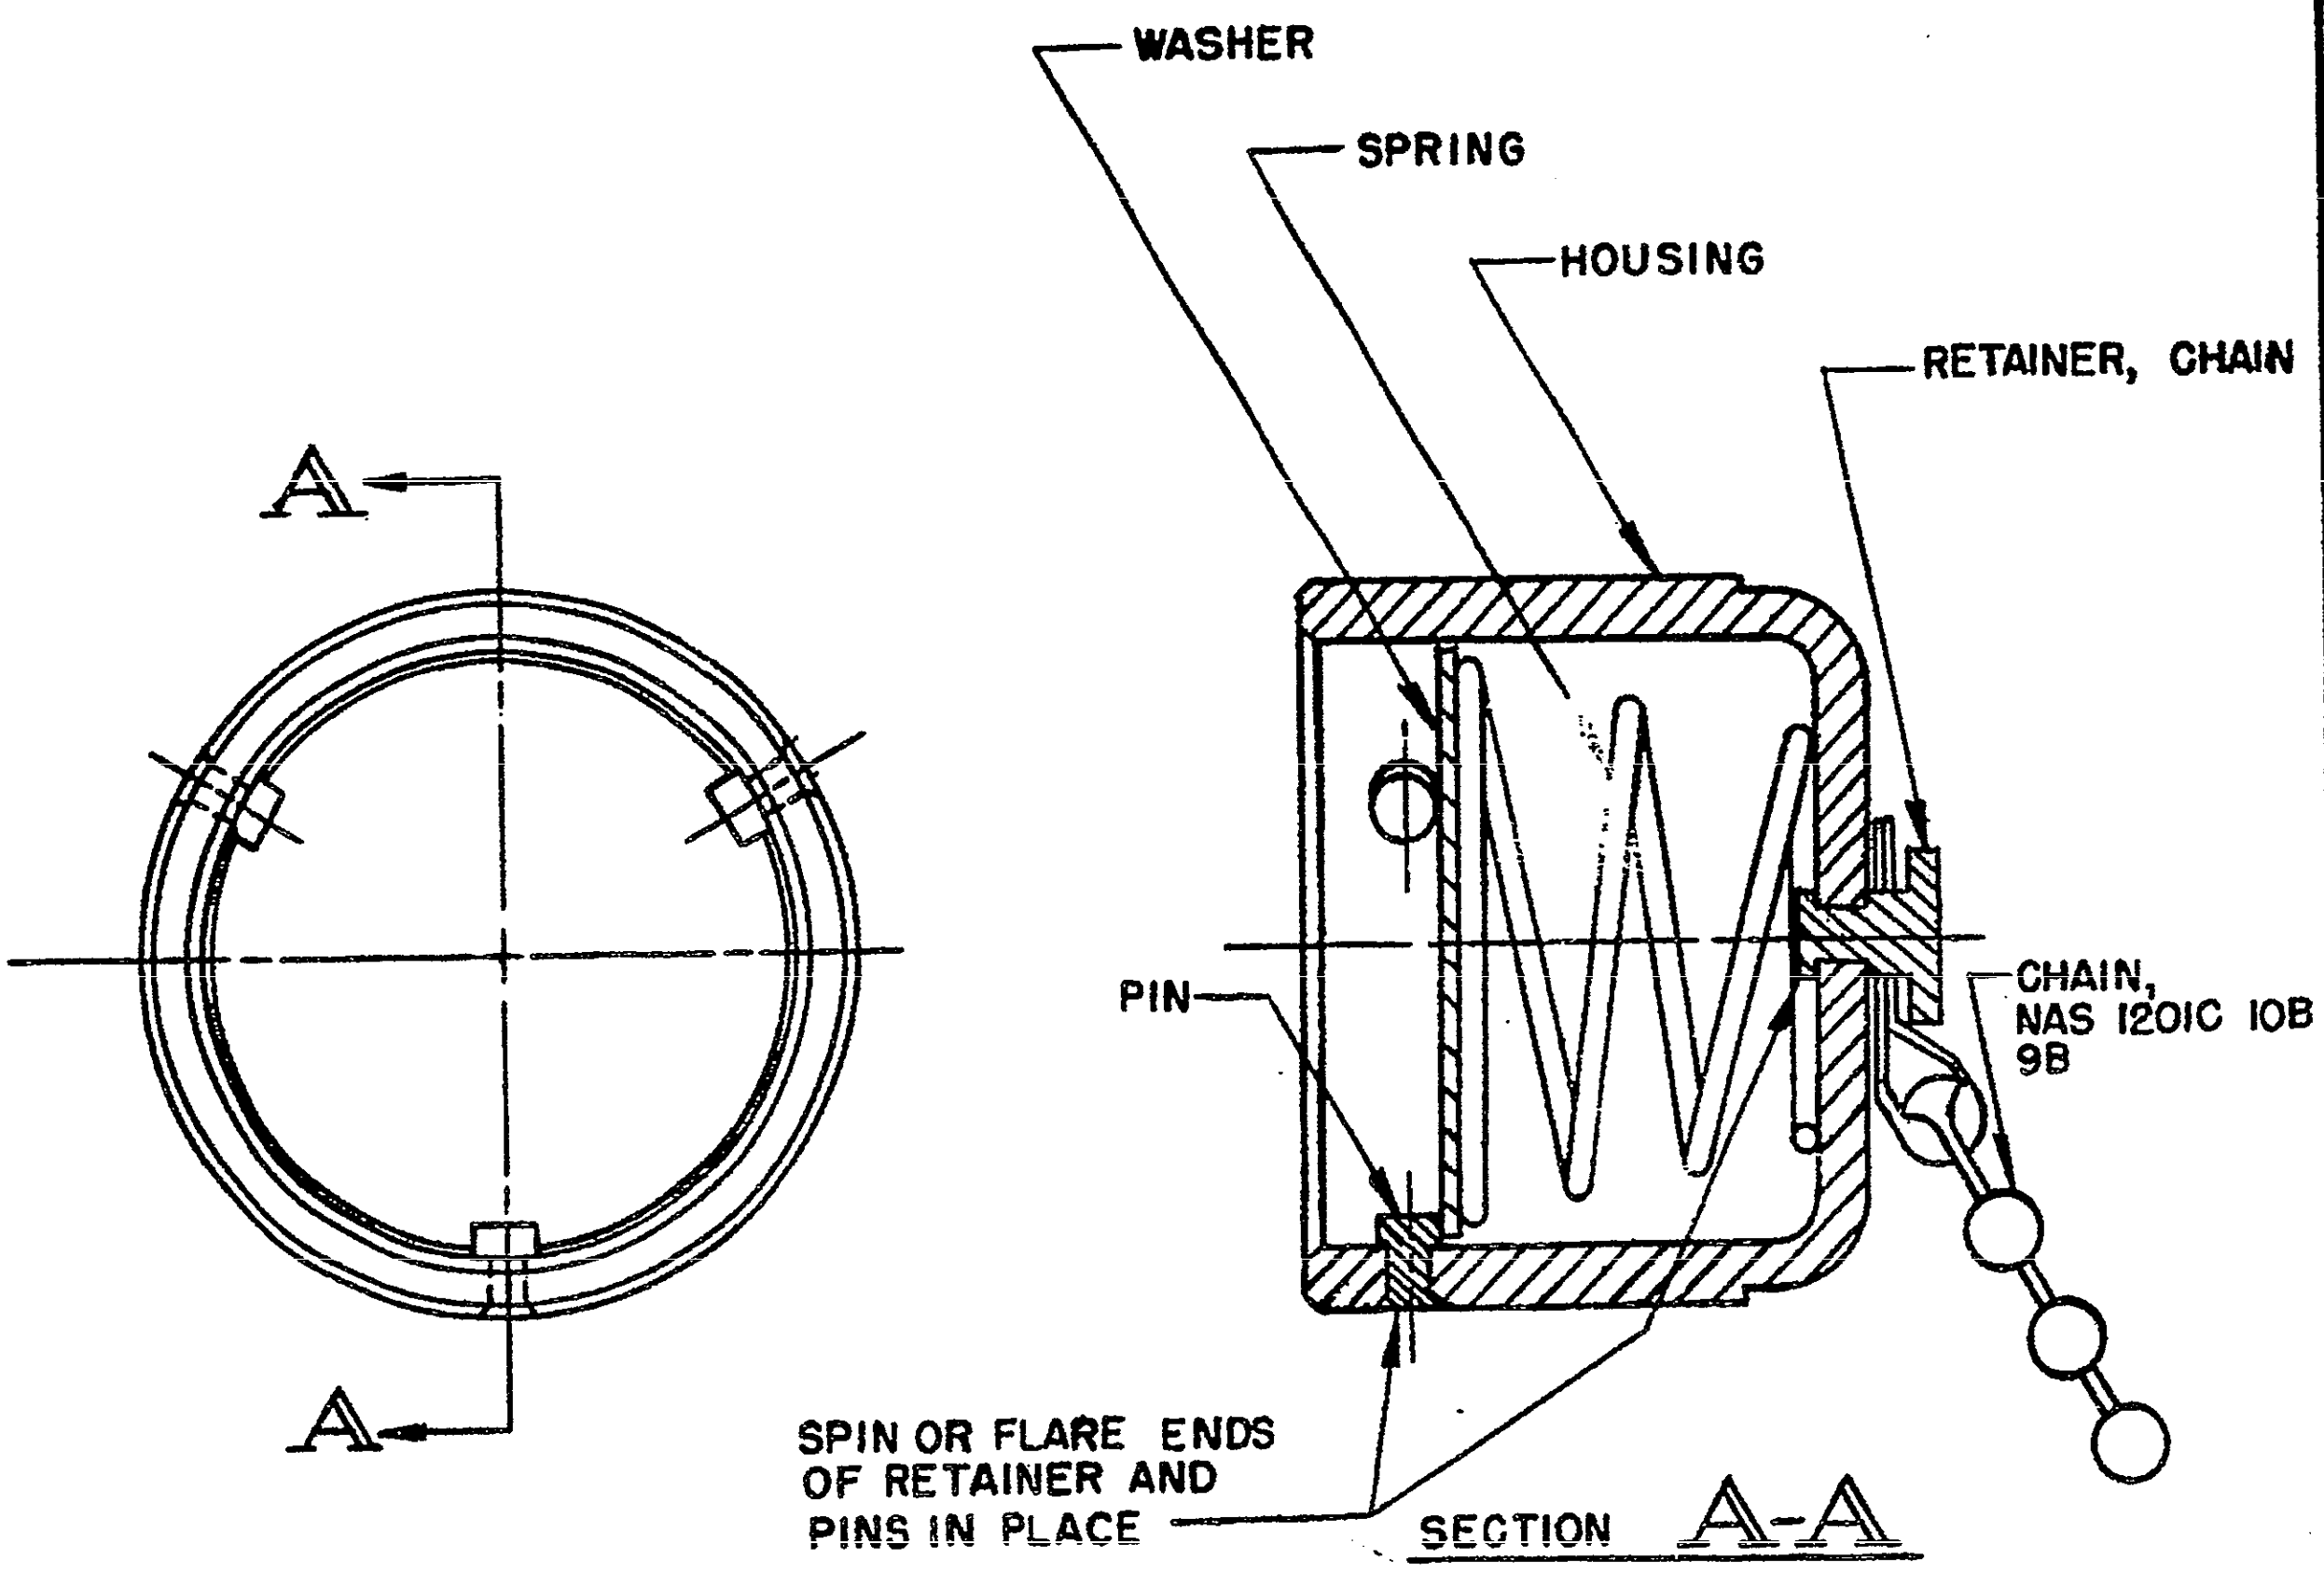

PART NO.
MS 27566 - 1

MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

REMOVE BURRS AND BREAK SHARP EDGES .005 MAX.

DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMALS ±.010.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED 29 Mar 67 REVISED Ⓐ 12 Mar 68 Ⓑ 18 Nov 68 Ⓒ 25 Sept 69 Ⓓ 13 Jan 71 Ⓔ 4 Jun 75 Ⓕ MAR 3 0 1981

Review activities: USAF-11

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND AND THE Department of the AIR FORCE and is mandatory for use by ESE ACTIVITIES. All other military activities are required to employ this standard where suitable.

P.A. USAF-99 Other Cust Navy - AS	TITLE CAP ASSEMBLY, LIQUID OXYGEN FILL VALVE	MILITARY STANDARD MS 27566 SHEET 1 OF 3
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	

DD FORM 1 SEP 65 672-1 (Limited coordination) EDITION OF 1 SEP 57 MAY BE USED.

PROJ. NO. 1660 - 0417

FED. SUP CLASS
1660

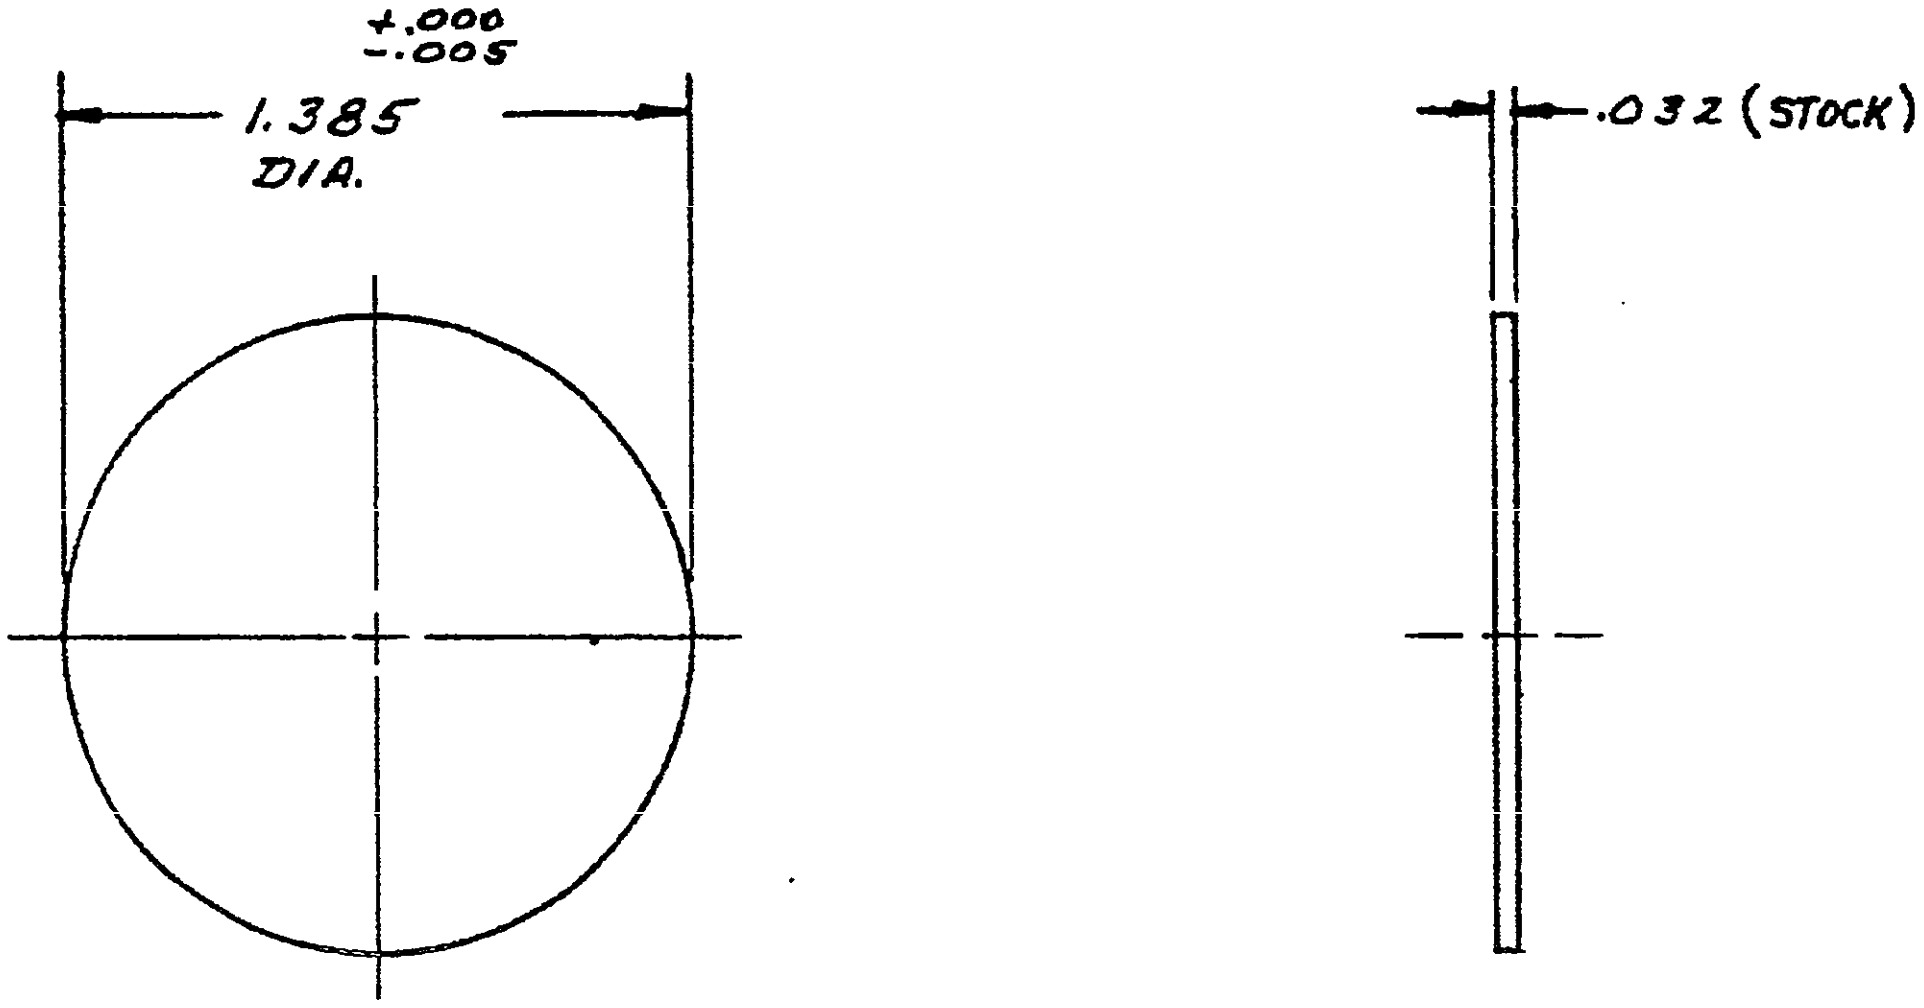

WASHER

MATERIAL: TYPE 302 STEEL, PER MIL-S-5059, COND. A.
PASSIVATE PER MIL-S-5002.
Ⓕ ~~ALTERNATE MATERIAL: TYPE 304 STEEL, PER QQ-S-766, CONDITION "A"~~

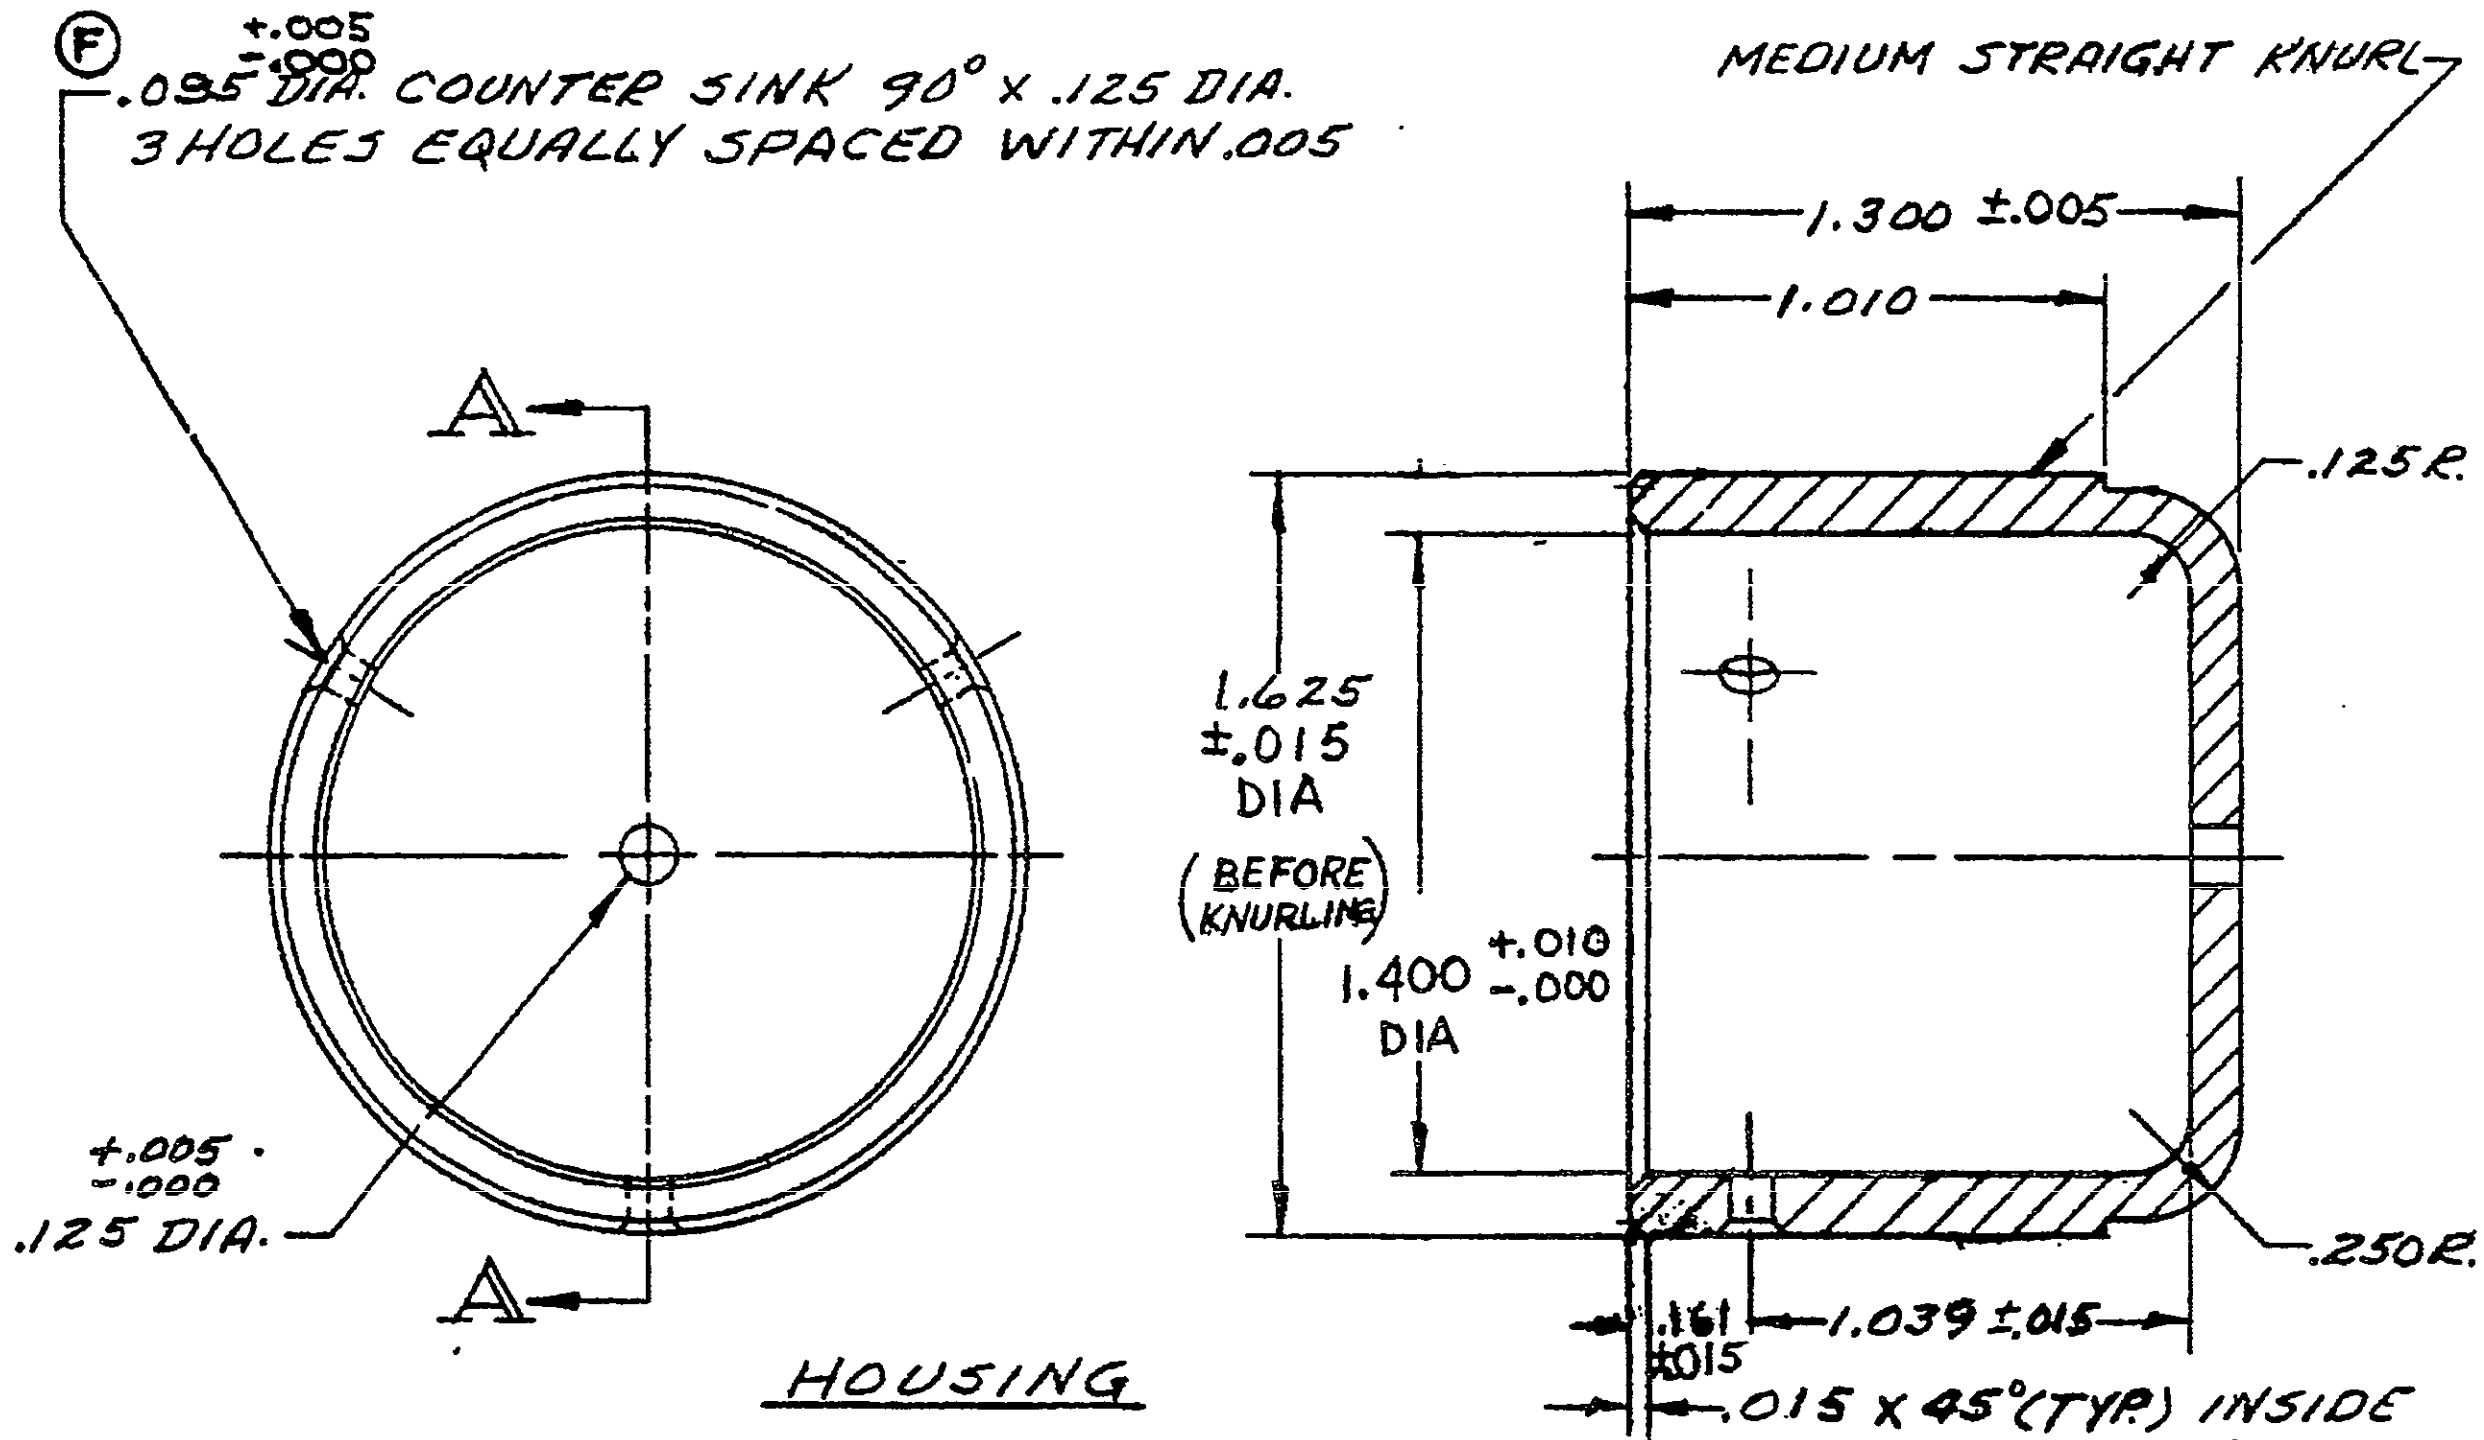

HOUSING

SECTION A-A

MATERIAL: 6061-0, AL. ALLOY
PER SPEC. QQ-A-250/11; COND. O.
ALTERNATE MAT'L.: 2024-T-4, AL. ALLOY
PER SPEC. QQ-A-225/6, COND. T-4.
ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, COLOR BLACK
FINISH: ALL SURFACES 125√ PER ANSI B46.1

APPROVED 29 MAY '67 REVISED Ⓔ FOR CHANGES SEE SHEETS 1 AND 2, Ⓕ MAR 3 0 1981

REVIEW ACTIVITIES: USAF-11

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND AND THE Department of the AIR FORCE and is mandatory for use by THESE ACTIVITIES. All other military activities are required to employ this standard where suitable.

P.A. USAF-99 Other Cust NAVY-AS	TITLE CAP ASSEMBLY, LIQUID OXYGEN FILL VALVE	MILITARY STANDARD MS 27566
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 3

DD FORM 1 SEP 63 672-1 (Limited coordination) EDITION OF 1 SEP 57 MAY BE USED.

P. No. 1660-0417

FED SUP CLASS
1660



SPRING

MATERIAL: .070 DIA. TYPE 302 WIRE PER SPEC. QQ-W-423, COND. B
PASSIVATE PER MIL-S-5002
TOTAL COILS: 3
TOTAL COMPRESSED HEIGHT: .070
SPRING RATE: 10.3 LBS/IN. TO SUPPORT 7 LBS. @ .300 HEIGHT.
ENDS TO BE SQUARED.

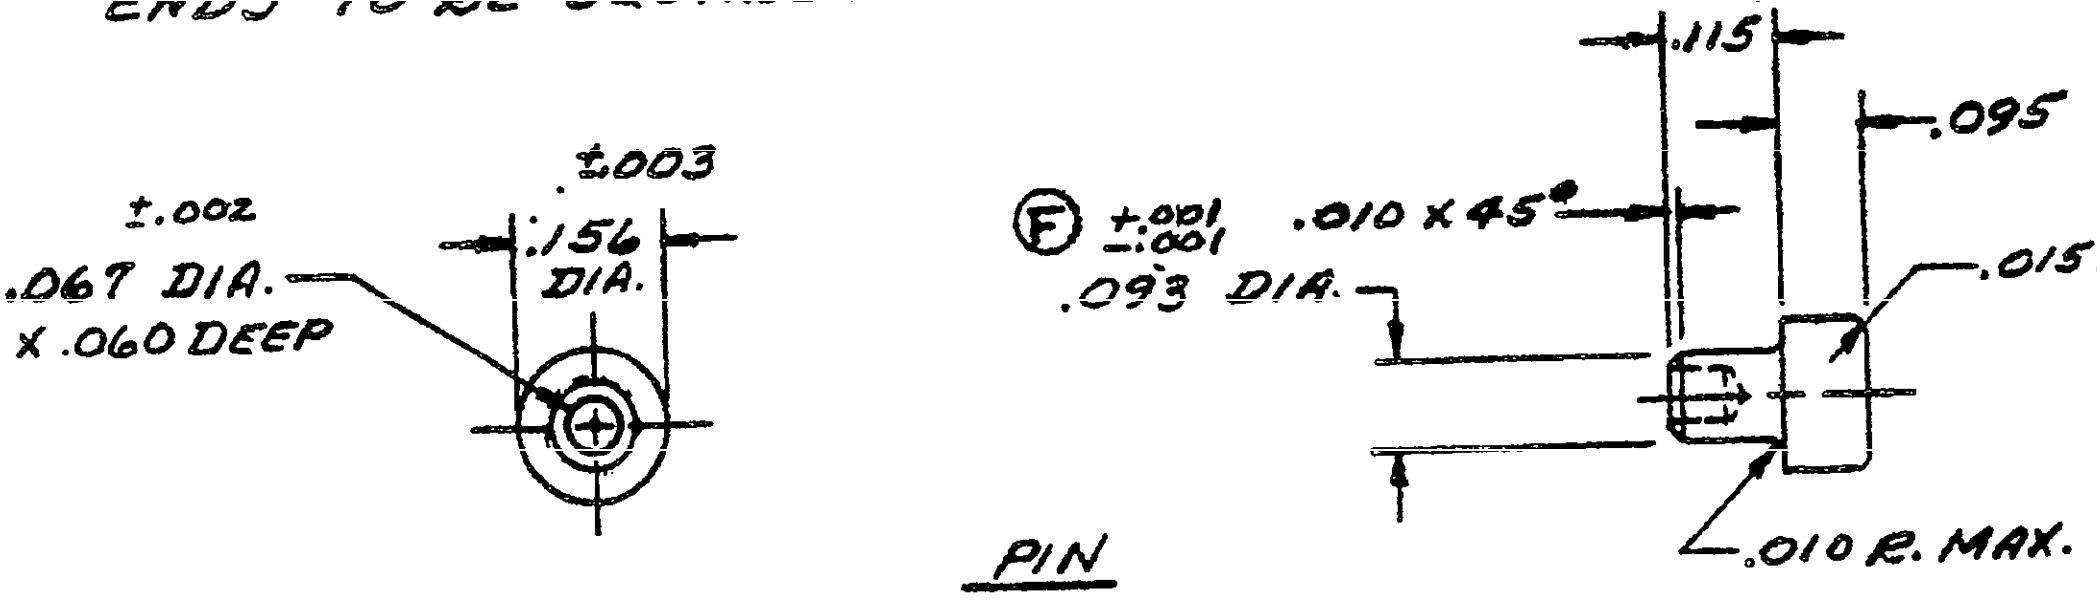

PIN

COND. A.

Ⓕ MATERIAL: TYPE 303, PER ASTM A 582
PASSIVATE PER MIL-S-5002
FINISH: 125√ ALL OVER PER ANSI B46.1

3 EACH REQUIRED.

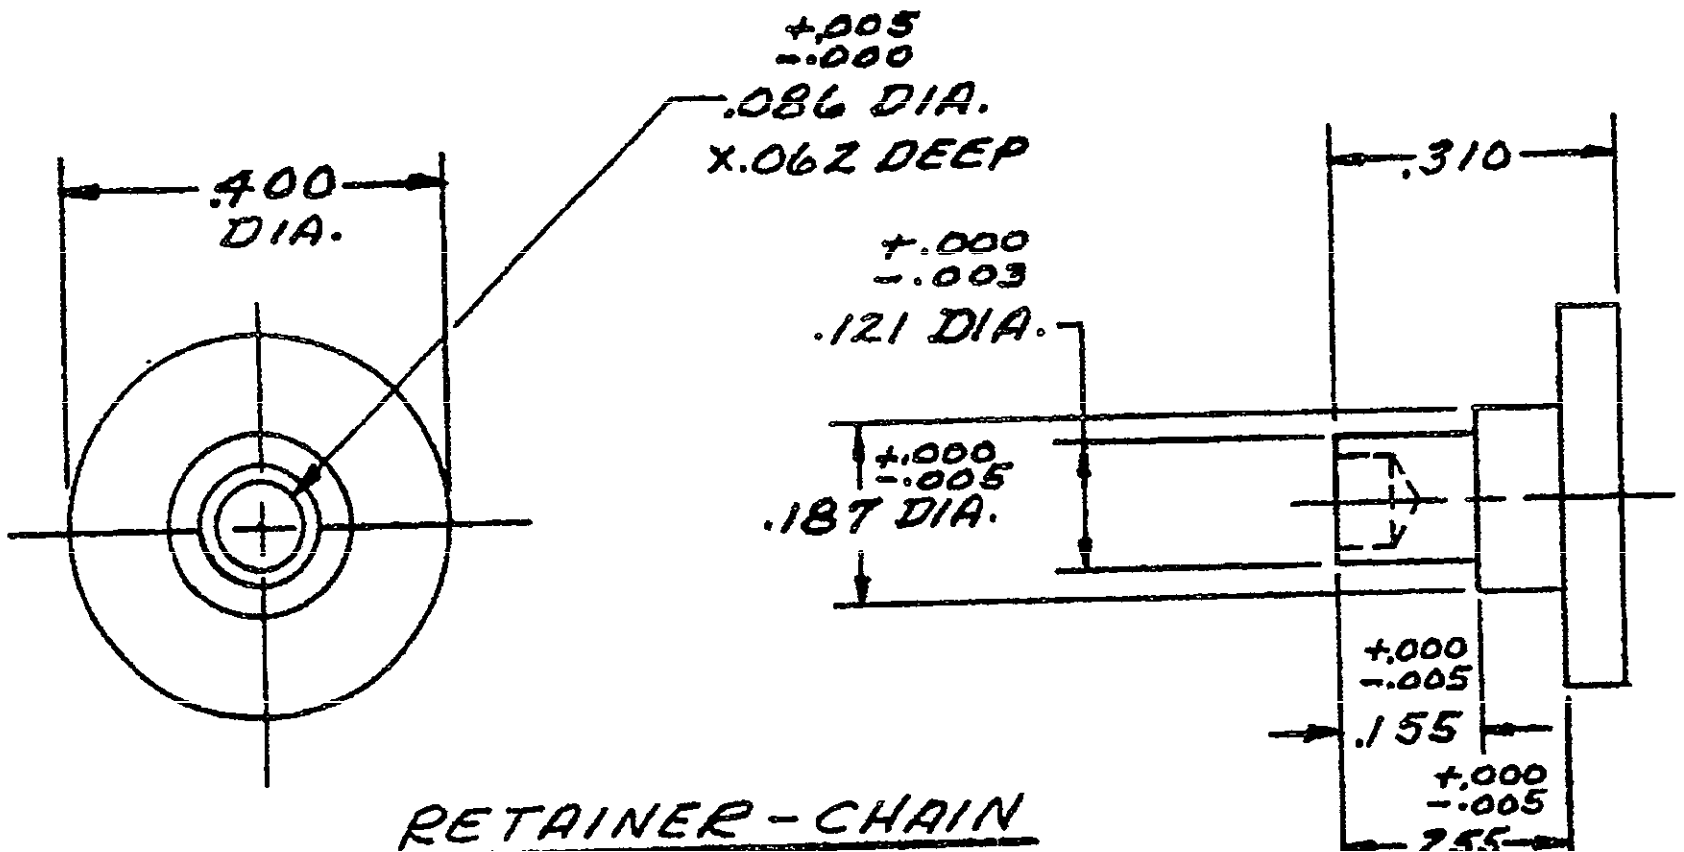

RETAINER-CHAIN

MATERIAL: AL. ALLOY 2024-T4,
PER SPEC. QQ-A-225/6,
ANODIZE PER MIL-A-8625 TYPE II, CLASS 2, COLOR BLACK
FINISH: 125√ MIN. ALL OVER PER ANSI B46.1

APPROVED 29MAY68 REVISED Ⓕ FOR CHANGES SEE SHEETS 1 AND 2. Ⓕ MAR 3 0 1981

REVIEW ACTIVITIES: USAF-11

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND AND THE Department of the A.F. [illegible] and is mandatory for use by [illegible] ACTIVITIES. All other military activities are required to employ this standard where suitable.

P.A. USAF-99 Other Cust NAVY-AS	TITLE CAP ASSEMBLY, LIQUID OXYGEN FILL VALVE	MILITARY STANDARD MS27566
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 3 OF 3

P. No. 1660-0417

DD FORM 1 SEP 63 672-1 (Continued) EDITION OF 1 SEP 57 MAY BE USED.