INCH-POUND
MS27652B
W/AMENDMENT 2
27 June 2025
SUPERSEDING
MS27652B
W/AMENDMENT 1
8 February 2008

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES I

Inactive for new design after 13 August 1974. For new design, use MS27466.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

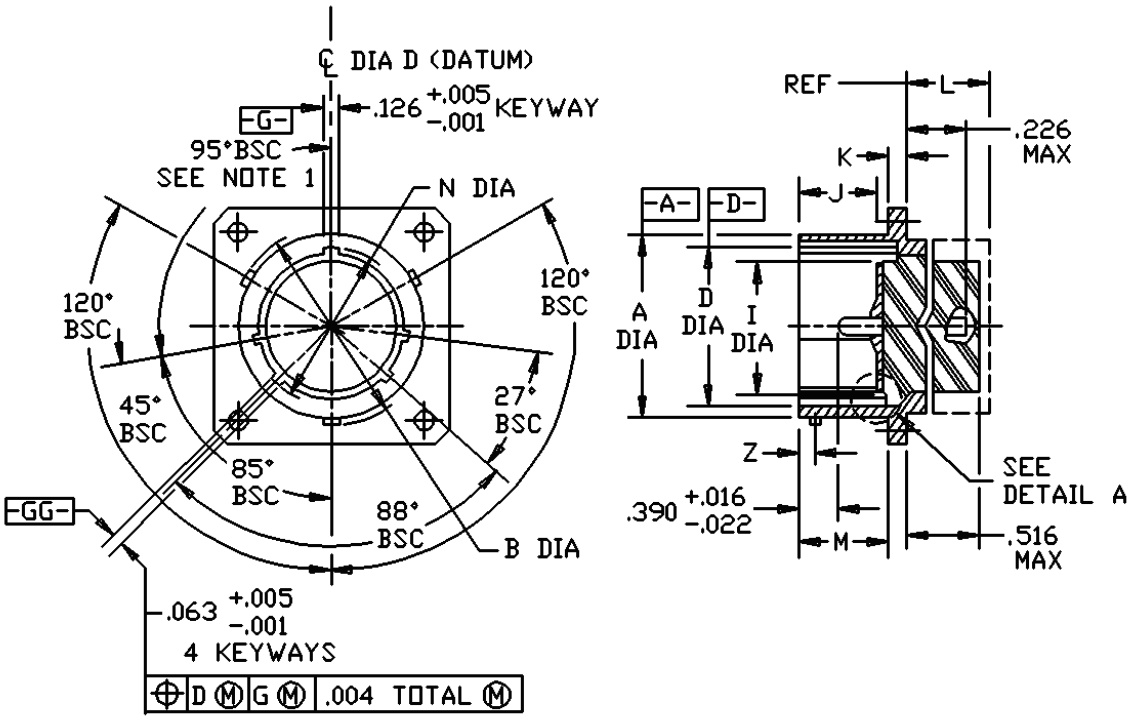


FIGURE 1. Receptacle, classes E and T.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

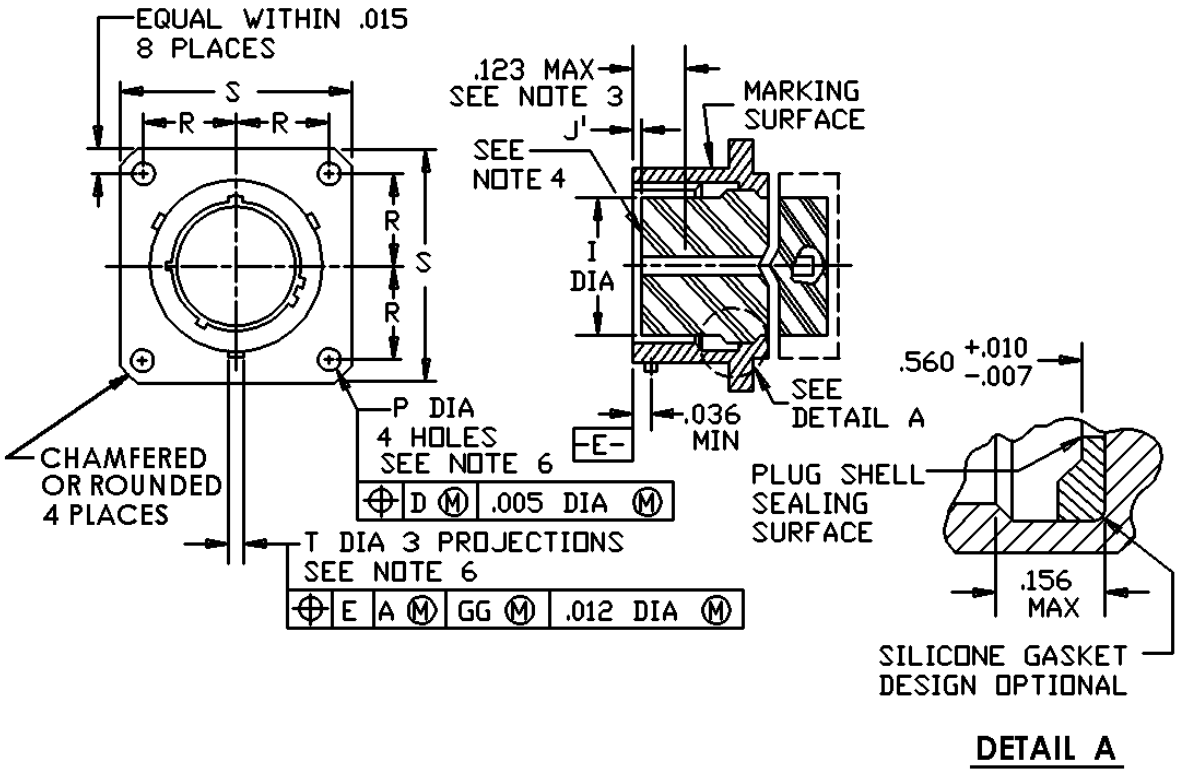


FIGURE 1. Receptacle, classes E and T – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

Shell size	A dia +.001 -.005	B dia +.000 -.016	D dia +.005 -.001	I dia max	J +.003 -.010 pin insert	J[1] +.003 -.010 socket insert	K +.015 -.000	M +.000 -.005
9	.572	.662	.442	.290	.576	.020	.085	.632
11	.700	.810	.570	.418				
13	.850	.960	.687	.532				
15	.975	1.085	.812	.657				
17	1.100	1.210	.937	.782				
19	1.207	1.317	1.042	.871				
21	1.332	1.442	1.167	.996			.115	.602
23	1.457	1.567	1.292	1.121				
25	1.582	1.692	1.417	1.246				

Shell size	N dia +.005 -.006	P dia +.010 -.005	R BSC	S ± .020	T dia +.010 -.005	Z BSC	For insert arrangement see MIL-STD-1560
9	.492	.128	.3595	.938	.078	.100	
11	.620		.406	1.031			
13	.769		.453	1.125			
15	.894		.4845	1.219			
17	1.019		.531	1.312			
19	1.124		.578	1.438			
21	1.249		.625	1.562			
23	1.374	.147	.6875	1.688			
25	1.499		.750	1.812	.125	.109	

FIGURE 1. Receptacle, classes E and T – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

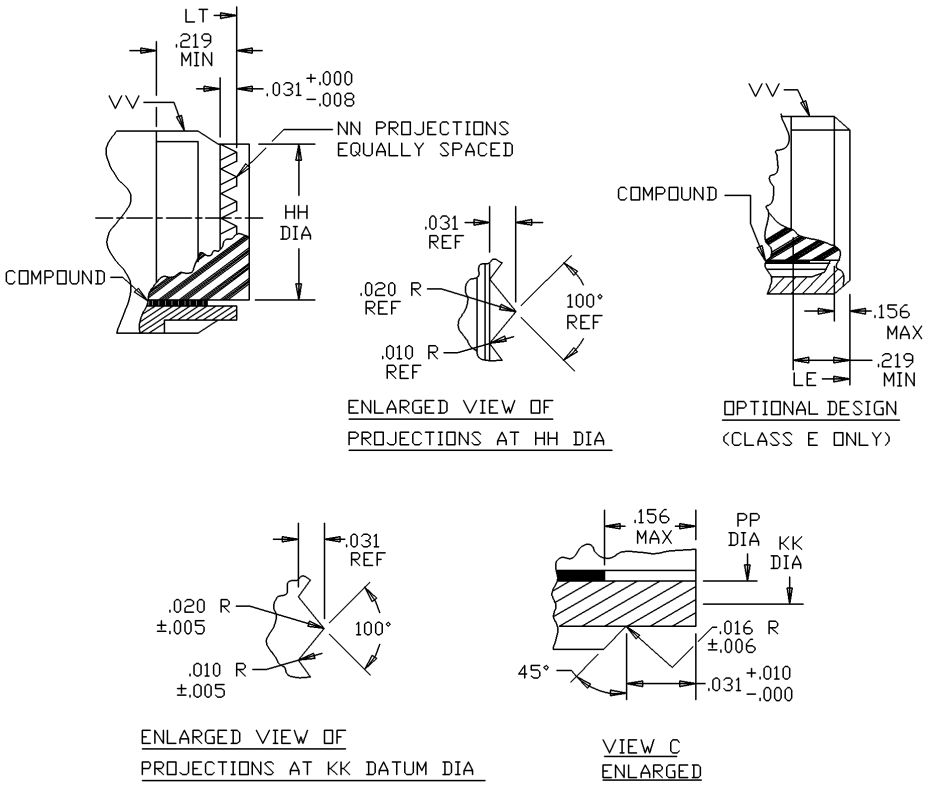

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	.025	.010	.254	.031	.787	.219	5.562
.004	.102	.012	.305	.036	.914	.266	6.756
.005	.127	.015	.381	.063	1.600	.390	9.906
.006	.152	.016	.406	.123	3.124	.516	13.106
.007	.178	.020	.508	.126	3.200	.560	14.224
.008	.203	.022	.559	.156	3.962		

FIGURE 1. Receptacle, classes E and T - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

Shell size	HH dia +.001 -.005	KK DATUM dia	NN	PP dia ± .003	LE max length	LT max length	VV Thread class 2A UNEF (plated)
9	.387	.366	12	.344	.531	.531	7/16-28
11	.515	.487	16	.472			9/16-24
13	.628	.609	20	.586			11/16-24
15	.754	.731	24	.711			13/16-20
17	.879	.853	28	.836			15/16-20
19	.985	.974	32	.942			1 1/16-18
21	1.110	1.097	36	1.067			1 3/16-18
23	1.235	1.218	40	1.192			1 5/16-18
25	1.360	1.340	44	1.317			1 7/16-18

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Normal keyway position. For other keyway positions, see MIL-DTL-38999.
4. Insert front surface shall be flat within .005 Total Indicator Reading (TIR).
5. Diameters A and D shall be concentric within .015 TIR.
6. Diameters D and I shall be concentric within .015 TIR at Maximum Material Condition (MMC).
7. Diameter A with respect to diameter B, and diameter D with respect to diameter N shall be concentric at MMC.
8. The gage features for GG shall be .010 smaller than the MMC size at basic location.
9. The point at which the gage pin, having the same basic diameter as the mating contact and a square face, touches socket contact spring.

FIGURE 1. Receptacle, classes E and T - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MS27467, MS27653 and MS27661.
Insert arrangements: See MIL-STD-1560.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:



Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-1560
MS27466
MS27467
MS27653
MS27661

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2025-054)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at **https://assist.dla.mil**.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.