
This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

User activities:

Review activities:

FED. SUP CLASS
5935

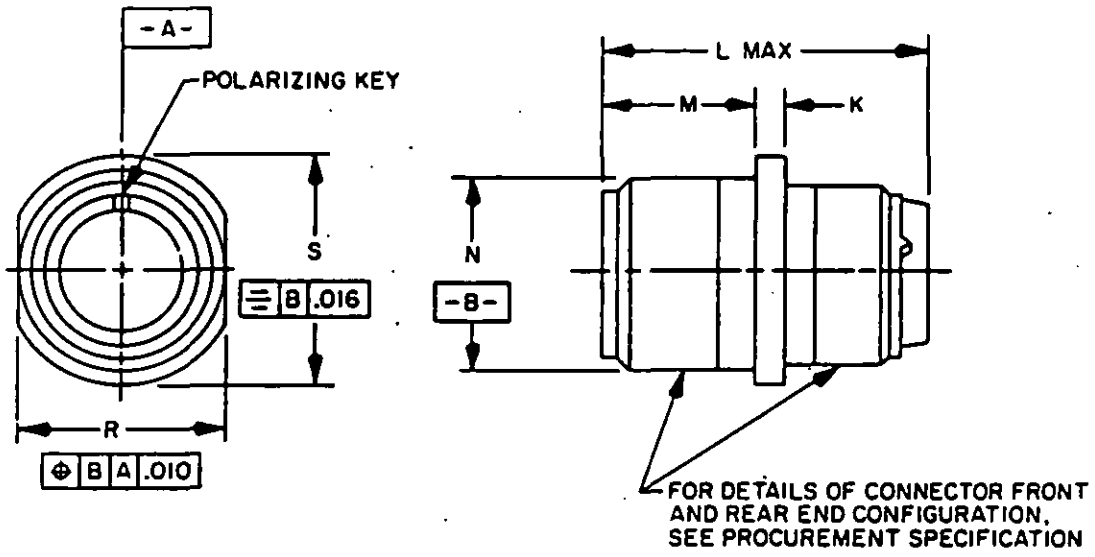

CLASSES D, L, U, W ENVIRONMENT RESISTANT

Class R cancelled after 18 Oct 71.
Classes K and Y cancelled after 18 Feb 72
Classes L, U, and W inactive for design after 23 MAR 76

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016.
3. Dimensions and tolerancing in accordance with ANSI Y14.5-1973.
4. MIL-C-5015 crimp contact, front and rear release connectors and solder contact connectors are intermateable.
5. Unless otherwise shown, corresponding features of pin and socket contact connectors are identical.
6. For insert arrangements see MIL-STD-1651.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 7 Nov 69 REVISED (E) 17 DEC 75 (F) 23 Mar 76 (G) 9 April 1979

(G) DENOTES CHANGES

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, CABLE CONNECTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3401(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 1 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 5935-N066-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

SIZE	K ±.015	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8, 4 & 0 CONT'S	M +.031 -.000	N +.000 -.062	R	S ±.031
8S	.083	2.031		.562	.532	.504 .496	.729
10S	↓	↓		↓	.656	.629 .621	.854
10SL					.656	.629 .621	.854
12S		2.031		.562	.782	.754 .746	.974
12		2.125		.750	.782	.754 .746	.974
14S		2.031		.562	.906	.879 .871	1.099
14		2.125		.750	.906	.879 .871	1.099
16S	↓	2.031		.562	1.032	1.005 .996	1.224
16	.083	2.125	2.500	.750	1.032	1.005 .996	1.224
18	.125	↓	↓	↓	1.156	1.131 1.121	1.349
20	↓				1.282	1.256 1.246	1.474
22				.750	1.406	1.381 1.371	1.599
24				.812	1.532	1.506 1.496	1.715
28				.812	1.782	1.756 1.746	1.974
32				.875	2.032	2.007 1.996	2.224
36				↓	2.282	2.257 2.246	2.474
40					2.532	2.511 2.496	2.724
44	↓	↓	↓	↓	2.782	2.761 2.746	2.974
48	.125	2.125	2.500	.875	3.032	3.011 2.996	3.224

EXAMPLE OF PART NO.: MS3401D 28-11PY

MS3401 D 28 - 11 P Y

- MS3401 — Basic part number
- D — Class D, L, U & W
- 28 — Material designator S - Stainless steel. Leave blank for aluminum alloy.
- 11 — Shell size
- P — Insert arrangement
- Y — Contact designator
- Alternate insert position W, X, Y or Z. Leave blank for normal position.

APPROVED 7 Nov 69 REVISED Ⓖ FOR CHANGES SEE SHEET 3

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.


User activities:

Review activities:

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, CABLE CONNECTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3401(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 2 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

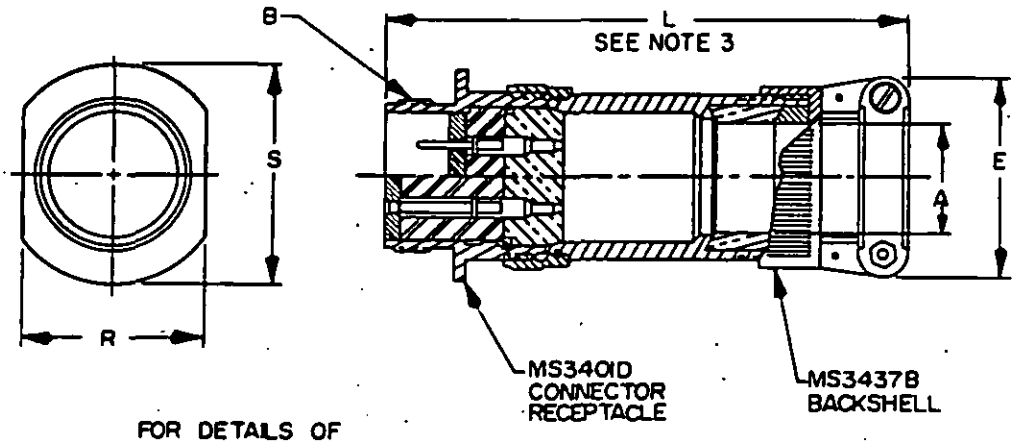

FOR DETAILS OF
CONNECTOR FRONT &
REAR END CONFIGURATION
SEE PROCUREMENT
SPECIFICATION

CLASS DJ ENVIRONMENT RESISTANT

Ⓖ REQUIREMENTS:
1. Connector and backshell shall be of the same material and finish in accordance with MIL-C-5015.
2. Connector, backshell and ancillary hardware shall conform to the dissimilar metal compatibility requirements of MIL-STD-454, Requirement 16.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016.
3. For size 8, 4 and 0 contacts, add .375 to overall length.
4. Unit package shall be marked with class DJ part number only. Connector shall be marked with class D part number.
5. This assembly is available only with class D or DS connector receptacle for jacketed cable.
6. Unless otherwise shown, corresponding features of pin and socket contact connectors are identical.
7. MIL-C-5015 crimp contact, front and rear release connectors and solder contact connectors are intermateable.
8. Dimensions and tolerances in accordance with ANSI Y14.5-1973.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.
10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

APPROVED 7 Nov 69 REVISED Ⓖ FOR CHANGES SEE SHEET 3

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

P.A Navy - AS	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, CABLE CONNECTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD
Other Cust			MS3401(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 3 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

ASSEMBLY NO.	CONNECTOR RECEPTACLE NO.	BACKSHELL ASSEMBLY NO.	A CABLE ENTRY MAX	A CABLE ENTRY MIN	B THREAD CLASS 2	E MAX.	L MAX.	R +.004 -.015	S +.004 -.015
MS3401DJ 10AXX	MS3401D-10S-XX	MS3437B-9A	.312	.125	.625-24UNEF	.957	4.938	.625	.854
10BXX	-10S-XX	-11A	.437	.250		1.145	5.638	.625	.854
10DXX	-10S-XX	-136A	.375	.250		1.145	4.938	.625	.854
11AXX	-10SL-XX	-9A	.312	.125		.957	4.938	.625	.854
11BXX	-10SL-XX	-11A	.437	.250		1.145	5.638	.625	.854
11DXX	-10SL-XX	-136A	.375	.250	.625-24UNEF	1.145	4.938	.625	.854
13AXX	-12S-XX	-119A	.312	.125	.750-20UNEF	.957	4.938	.750	.974
13BXX	-12S-XX	-15A	.625	.350		1.332	5.638	.750	.974
13DXX	-12S-XX	-139A	.500	.350		1.332	4.938	.750	.974
13EXX	-12S-XX	-13A	.937	.250		1.145	4.938	.750	.974
12AXX	-12-XX	-119A	.312	.125		.957	4.938	.750	.974
12BXX	-12-XX	-15A	.625	.350		1.332	5.638	.750	.974
12DXX	-12-XX	-139A	.500	.350		1.332	4.938	.750	.974
12EXX	-12-XX	-13A	.937	.250	.750-20UNEF	1.145	4.938	.750	.974
15AXX	-14S-XX	-116A	.937	.250	.875-20UNEF	1.145	4.938	.875	1.099
15BXX	-14S-XX	-19A	.750	.500		1.551	5.750	.875	1.099
15DXX	-14S-XX	-17A	.575	.350		1.332	4.938	.875	1.099
15EXX	-14S-XX	-150A	.312	.125		.957	4.938	.875	1.099
14AXX	-14-XX	-116A	.937	.250		1.145	4.938	.875	1.099
14BXX	-14-XX	-19A	.750	.500		1.551	5.750	.875	1.099
14DXX	-14-XX	-17A	.575	.350		1.332	4.938	.875	1.099
14EXX	-14-XX	-150A	.312	.125	.875-20UNEF	.957	4.938	.875	1.099
17AXX	-16S-XX	-21A	.700	.500	1.000-20UNEF	1.551	5.000	1.000	1.224
17BXX	-16S-XX	-23A	.937	.625		1.770	5.812	1.000	1.224
17DXX	-16S-XX	-112A	.437	.250		1.145	4.938	1.000	1.224
17EXX	-16S-XX	-118A	.625	.350		1.332	4.938	1.000	1.224
16AXX	-16-XX	-21A	.700	.500		1.551	5.000	1.000	1.224
16BXX	-16-XX	-23A	.937	.625		1.770	5.812	1.000	1.224
16DXX	-16-XX	-112A	.437	.250		1.145	4.938	1.000	1.224
16EXX	-16-XX	-118A	.625	.350	1.000-20UNEF	1.332	4.938	1.000	1.224
13AXX	-18-XX	-25A	.625	.350	1.125-18UNEF	1.332	4.938	1.125	1.349
13BXX	-18-XX	-27A	.750	.500		1.551	5.000	1.125	1.349
18EXX	-18-XX	-120A	.312	.125		.957	4.938	1.125	1.349
18FXX	-18-XX	-122A	.437	.250	1.125-18UNEF	1.145	4.938	1.125	1.349
20AXX	-20-XX	-31A	.625	.350	1.250-18UNEF	1.332	5.938	1.250	1.474
20BXX	-20-XX	-33A	.750	.500		1.551	6.000	1.250	1.474
20EXX	-20-XX	-37A	1.250	.875		2.113	7.062	1.250	1.474
20FXX	-20-XX	-129A	.437	.250		1.145	5.938	1.250	1.474
20GXX	-20-XX	-140A	.904	.625	1.250-18UNEF	1.770	6.062	1.250	1.474
22AXX	-22-XX	-39A	.625	.350	1.375-18UNEF	1.332	5.938	1.375	1.599
22BXX	-22-XX	-41A	.750	.500		1.551	6.000	1.375	1.599
22DXX	-22-XX	-43A	.937	.625		1.770	6.062	1.375	1.599
22EXX	-22-XX	-45A	1.250	.875		2.113	7.062	1.375	1.599
MS3401DJ 22FXX	MS3401D-22-XX	MS3437B-126A	.312	.125	1.375-18UNEF	.957	5.938	1.375	1.599

APPROVED 7 Nov 69 REVISED Ⓖ FOR CHANGES SEE SHEET 3

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

P.A Navy - AS	International Interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, CABLE CONNECTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD
Other Cust			MS3401(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 4 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

ASSEMBLY NO.	CONNECTOR RECEPTACLE NO.	BACKSHELL ASSEMBLY NO.	A CABLE ENTRY MAX.	A CABLE ENTRY MIN.	B THREAD CLASS 2	E MAX.	L MAX.	R +.000 -.004	S +.015 -.015
MS3401DJ 22GXX	MS3401D-22-XX	MS3437B-128A	.937	.250	1.375-13UNEF	1.145	5.938	1.375	1.59
22HXX	-22-XX	-142A	1.029	.375	1.375-18UNEF	2.113	6.312	1.375	1.59
28AXX	-28-XX	-47A	.750	.500	1.500-18UNEF	1.551	6.000	1.500	1.715
28BXX	-28-XX	-49A	.812	.625	↑	1.770	6.062	1.500	1.715
28DXX	-28-XX	-51A	.937	.625	↑	1.770	6.062	1.500	1.715
28EXX	-28-XX	-53A	1.250	.875	↑	2.113	7.062	1.500	1.715
28FXX	-28-XX	-130A	.625	.350	↓	1.332	5.938	1.500	1.715
28GXX	-28-XX	-144A	1.144	.875	1.500-13UNEF	2.113	6.312	1.500	1.715
28AXX	-28-XX	-55A	.750	.500	1.750-18UNS	1.551	6.000	1.750	1.970
28BXX	-28-XX	-57A	.937	.625	↑	1.770	6.062	1.750	1.970
28DXX	-28-XX	-59A	1.250	.875	↑	2.113	6.312	1.750	1.970
28EXX	-28-XX	-61A	1.375	1.000	1.750-18UNS	2.363	6.438	1.750	1.970
32AXX	-32-XX	-63A	.937	.625	2.000-18UNS	1.770	6.062	2.000	2.229
32BXX	-32-XX	-65A	1.250	.875	↑	2.113	6.312	2.000	2.229
32DXX	-32-XX	-67A	1.375	1.000	↑	2.363	6.438	2.000	2.229
32EXX	-32-XX	-69A	1.625	1.250	2.000-18UNS	2.770	6.750	2.000	2.229
36AXX	-36-XX	-71A	1.250	.875	2.250-16UN	2.113	7.312	2.250	2.474
36BXX	-36-XX	-73A	1.375	1.000	↑	2.363	7.438	2.250	2.474
36DXX	-36-XX	-75A	1.625	1.250	↑	2.770	7.688	2.250	2.474
36EXX	-36-XX	-146A	1.840	1.437	↑	3.020	7.750	2.250	2.474
36FXX	-36-XX	-132A	.750	.500	↓	1.551	7.000	2.250	2.474
36GXX	-36-XX	-148A	.937	.625	2.250-16UN	1.770	7.062	2.250	2.474
40AXX	-40-XX	-79A	1.250	.875	2.500-16UN	2.113	7.312	2.505	2.724
40BXX	-40-XX	-81A	1.375	1.000	↑	2.363	7.438	2.505	2.724
40DXX	-40-XX	-83A	1.625	1.250	↑	2.770	7.688	2.505	2.724
40EXX	-40-XX	-85A	1.840	1.437	↑	3.020	7.750	2.505	2.724
40FXX	-40-XX	-139A	.750	.500	2.500-16UN	1.551	7.000	2.505	2.724
44AXX	-44-XX	-87A	1.250	.875	2.750-16UN	2.113	7.312	2.755	2.974
44BXX	-44-XX	-89A	1.375	1.000	↑	2.363	7.433	2.755	2.974
44DXX	-44-XX	-91A	1.625	1.250	↑	2.770	7.688	2.755	2.974
44EXX	-44-XX	-93A	1.840	1.437	↑	3.020	7.750	2.755	2.974
44FXX	-44-XX	-154A	.937	.625	2.750-16UN	1.770	7.062	2.755	2.974
48AXX	-48-XX	-95A	1.250	.875	3.000-16UN	2.113	7.312	3.005	3.224
48BXX	-48-XX	-97A	1.375	1.000	↑	2.363	7.433	3.005	3.224
48DXX	-48-XX	-99A	1.625	1.250	↑	2.770	7.688	3.005	3.224
MS3401J 48EXX	MS3401D -48-XX	MS3437B -101A	1.840	1.437	3.000-16UN	3.020	7.750	3.005	3.224

APPROVED 7 Nov 69 REVISED © FOR CHANGES SEE SHEET 3

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

User activities:

Review activities:

P.A Navy - AS	International Interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, CABLE CONNECTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD
Other Cust			MS3401(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 5 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

SUPERSESSION DATA

Buships Dwg. RE492043 Part number	Superseded by Part number
10-214110-**	MS3401DJ10A**
111-**	11A**
112-**	13A**
113-**	12A**
114-**	15A**
115-**	14A**
116-**	17E**
117-**	16E**
118-**	18A**
120-**	20B**
122-**	22B**
124-**	24D**
128-**	28B**
132-**	32B**
136-**	36B**
140-**	40D**
10-214144-**	MS3401DJ44E**

EXAMPLE OF PART NO.: MS3401DJ 18A11PY

MS3401 DJ 18 A 11 P Y

- MS3401 — Basic part number
- DJ — Class
- (blank) — Material designator S - Stainless steel. Leave blank for aluminum alloy.
- 18 — Shell size
- A — Designator for sealing range of MS3437 backshell
- 11 — Insert arrangement
- P — Contact designator
- Y — Alternate insert position W, X, Y, and Z - Leave blank for normal position.

APPROVED 7 Nov 69 REVISED © FOR CHANGES SEE SHEET 3

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, CABLE CONNECTING, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3401(NAVY)
Procurement Specification / MIL-C-5015		SUPERSEDES:	PAGE 6 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/1773

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.