
FED. SUP CLASS
5935

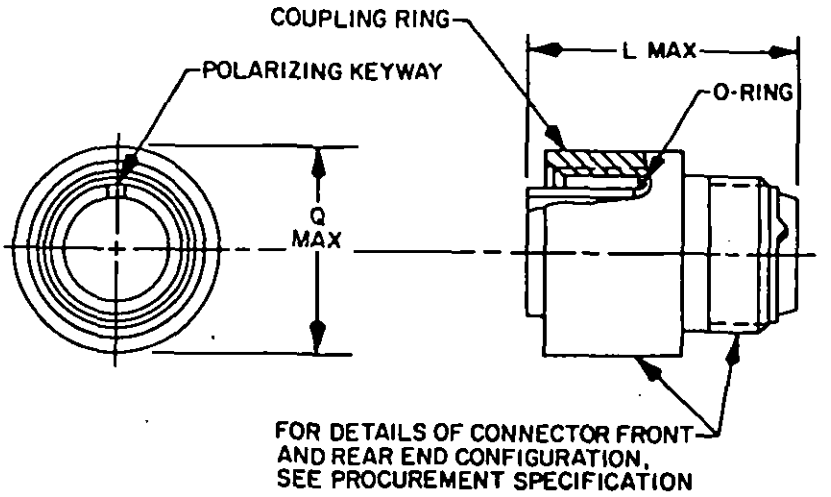

CLASSES D, K, L, U, W ENVIRONMENT RESISTANT

Classes R and S cancelled after 18 Oct 71
Class Y cancelled after 18 Feb 72
Class K connectors with electroless nickel inactive for design after 25 Apr 74
Classes L, U, and W inactive for design after 23 Mar 76

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016.
3. Dimensions and tolerancing in accordance with ANSI Y14.5-1973.
4. MIL-C-5015 crimp contact, front and rear release connectors and solder contact connectors are intermateable.
5. Unless otherwise shown, corresponding features of pin and socket contact connectors are identical.
6. For insert arrangements see MIL-STD-1651.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 7 Nov 69 REVISED (E) 25 Apr 74 (F) 17 DEC 75 (G) 23 MAR 76 (H) 9 April 1979

(H) DENOTES CHANGES

P.A Navy - AS
Other Cust
International Interest

TITLE CONNECTORS, PLUG, ELECTRIC, FRONT RELEASE, CRIMP CONTACT, AN TYPE

MILITARY STANDARD
MS3406(NAVY)

Procurement Specification
MIL-C-5015

SUPERSEDES:

PAGE 1 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 5935-N066-3

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

SIZE	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8, 4 & 0 CONT'S	Q MAX
8S	2.031		.844
10S			.969
10SL			.969
12S	2.031		1.062
12	2.125		1.062
14S	2.031		1.156
14	2.125		1.156
16S	2.031		1.250
16	2.125	2.500	1.250
18			1.344
20			1.469
22			1.594
24			1.719
28			1.969
32			2.219
36			2.469
40			2.719
44			2.969
48	2.125	2.500	3.219

EXAMPLE OF PART NO.: MS3406D 18-11PY

MS3406 D 18 - 11 P Y

- MS3406 — Basic part number
- D — Class D, K, L, U & W
- 18 — Material designator S - Stainless steel. T - Ferrous alloy with cadmium plate. Leave blank for aluminum alloy.
- 11 — Shell size
- P — Insert arrangement
- Y — Contact designator
- Alternate insert position W, X, Y or Z. Leave blank for normal position.

APPROVED 7 Nov 69 REVISED (H) FOR CHANGES SEE SHEET 3

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.


User activities:

Review activities:

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, PLUG, ELECTRIC, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3406(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 2 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

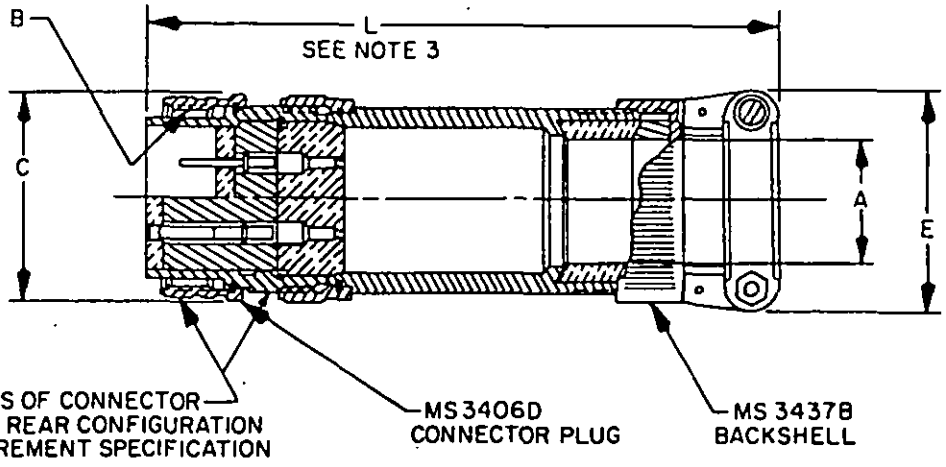

CLASS DJ ENVIRONMENT RESISTANT

(H) REQUIREMENTS:
1. Connector and backshell shall be of the same material and finish in accordance with MIL-C-5015.
2. Connector, backshell and ancillary hardware shall conform to the dissimilar metal compatibility requirements of MIL-STD-454, Requirement 16.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016.
3. For size 8, 4 and 0 contacts, add .375 to overall length.
4. Unit package shall be marked with class DJ part number only. Connectors shall be marked with class D part number.
5. *This assembly is available only with class D or DS connector plug for jacketed cable.*
6. Unless otherwise shown, corresponding features of pin and socket contact connectors are identical.
7. MIL-C-5015 crimp contact, front and rear release connectors and solder contact connectors are intermateable.
8. Dimensions and tolerances in accordance with ANSI Y14.5-1973.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
10. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 7 Nov 69 REVISED (H) FOR CHANGES SEE SHEET 3

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, PLUG, ELECTRIC, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3406(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 3 OF 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

ASSEMBLY NO.	CONNECTOR PLUG NO.	BACKSHELL ASSEMBLY NO.	A CABLE ENTRY MAX.	A CABLE ENTRY Min.	B THREAD CLASS 2	C DIA. MAX.	E MAX.	L MAX.
MS3406DJ 10AXX	MS3402D-10S-XX	MS3437B-9A	.312	.125	.625-24UNEF	.969	.957	4.938
10BXX	-10S-XX	-11A	.437	.250		.969	1.145	5.688
10DXX	-10S-XX	-13GA	.375	.250		.969	1.145	4.938
11AXX	-10SL-XX	-9A	.312	.125		.969	.957	4.938
11BXX	-10SL-XX	-11A	.437	.250		.969	1.145	5.688
11DXX	-10SL-XX	-13GA	.375	.250	.625-24UNEF	.969	1.145	4.938
13AXX	-12S-XX	-114A	.312	.125	.750-20UNEF	1.062	.957	4.938
13BXX	-12S-XX	-15A	.625	.350		1.062	1.332	5.688
13DXX	-12S-XX	-13GA	.500	.350		1.062	1.332	4.938
13EXX	-12S-XX	-13A	.437	.250		1.062	1.145	4.938
12AXX	-12-XX	-114A	.312	.125		1.062	.957	4.938
12BXX	-12-XX	-15A	.625	.350		1.062	1.332	5.688
12DXX	-12-XX	-138A	.500	.350		1.062	1.332	4.938
12EXX	-12-XX	-13A	.437	.250	.750-20UNEF	1.062	1.145	4.938
15AXX	-14S-XX	-116A	.437	.250	.875-20UNEF	1.156	1.145	4.938
15BXX	-14S-XX	-19A	.750	.500		1.156	1.551	5.750
15DXX	-14S-XX	-17A	.575	.350		1.156	1.332	4.938
15EXX	-14S-XX	-150A	.312	.125		1.156	.957	4.938
14AXX	-14-XX	-116A	.437	.250		1.156	1.145	4.938
14BXX	-14-XX	-19A	.750	.500		1.156	1.551	5.750
14DXX	-14-XX	-17A	.575	.350		1.156	1.332	4.938
14EXX	-14-XX	-150A	.312	.125	.875-20UNEF	1.156	.957	4.938
17AXX	-16S-XX	-21A	.700	.500	1.000-20UNEF	1.250	1.551	5.000
17BXX	-16S-XX	-23A	.937	.625		1.250	1.770	5.812
17DXX	-16S-XX	-112A	.437	.250		1.250	1.145	4.938
17EXX	-16S-XX	-118A	.625	.350		1.250	1.332	4.938
16AXX	-16-XX	-21A	.700	.500		1.250	1.551	5.000
16BXX	-16-XX	-23A	.937	.625		1.250	1.770	5.812
16DXX	-16-XX	-112A	.437	.250		1.250	1.145	4.938
16EXX	-16-XX	-118A	.625	.350	1.000-20UNEF	1.250	1.332	4.938
18AXX	-18-XX	-25A	.625	.350	1.125-18UNEF	1.344	1.332	4.938
18BXX	-18-XX	-27A	.750	.500		1.344	1.551	5.000
18EXX	-18-XX	-120A	.312	.125		1.344	.957	4.938
18FXX	-18-XX	-122A	.437	.250	1.125-18UNEF	1.344	1.145	4.938
20AXX	-20-XX	-31A	.625	.350	1.250-18UNEF	1.469	1.332	5.938
20BXX	-20-XX	-33A	.750	.500		1.469	1.551	6.000
20EXX	-20-XX	-37A	1.250	.975		1.469	2.113	7.062
20FXX	-20-XX	-124A	.437	.250		1.469	1.145	5.938
20GXX	-20-XX	-140A	.904	.625	1.250-18UNEF	1.469	1.770	6.062
22AXX	-22-XX	-39A	.625	.350	1.375-18UNEF	1.594	1.332	5.938
22BXX	-22-XX	-41A	.750	.500		1.594	1.551	6.000
22DXX	-22-XX	-43A	.937	.625		1.594	1.770	6.062
22EXX	-22-XX	-45A	1.250	.875		1.594	2.113	7.062
MS3406DJ 22FXX	MS3406D -22-XX	MS3437B -126A	.312	.125	1.375-18UNEF	1.594	.957	5.938

APPROVED 7 Nov 69 REVISED (H) FOR CHANGES SEE SHEET 3

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

NAVY AS

P.A Navy - AS	International Interest	TITLE CONNECTORS, PLUG, ELECTRIC, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD
Other Cust			MS3406(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 4 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

ASSEMBLY NO.	CONNECTOR PLUG NO.	BACKSHELL ASSEMBLY NO.	A CABLE ENTRY MAX.	A CABLE ENTRY MIN.	B THREAD CLASS 2	C DIA. MAX.	E MAX.	L MAX.
MS3406D 22GXX	MS3406D -22-XX	MS3437B -128A	.437	.250	1.375-18UNEF	1.594	1.145	5.938
22HXX	-22-XX	-142A	1.029	.875	1.375-18UNEF	1.594	2.113	6.312
24AXX	-24-XX	-47A	.750	.500	1.500-18UNEF	1.719	1.551	6.000
24BXX	-24-XX	-49A	.812	.625		1.719	1.770	6.062
24DXX	-24-XX	-51A	.937	.625		1.719	1.770	6.062
24EXX	-24-XX	-53A	1.250	.875		1.719	2.113	7.062
24FXX	-24-XX	-130A	.625	.350		1.719	1.332	5.938
24GXX	-24-XX	-144A	1.144	.875	1.500-18UNEF	1.719	2.113	6.312
28AXX	-28-XX	-55A	.750	.500	1.750-18UNS	1.969	1.551	6.000
28BXX	-28-XX	-57A	.937	.625		1.969	1.770	6.062
28DXX	-28-XX	-59A	1.250	.875		1.969	2.113	6.312
28EXX	-28-XX	-61A	1.375	1.000	1.750-18UNS	1.969	2.363	6.438
32AXX	-32-XX	-63A	.937	.625	2.000-18UNS	2.219	1.770	6.062
32BXX	-32-XX	-65A	1.250	.875		2.219	2.113	6.312
32DXX	-32-XX	-67A	1.375	1.000		2.219	2.363	6.438
32FXX	-32-XX	-69A	1.625	1.250	2.000-18UNS	2.219	2.770	6.750
36AXX	-36-XX	-71A	1.250	.875	2.250-16UN	2.469	2.113	7.312
36BXX	-36-XX	-73A	1.375	1.000		2.469	2.363	7.438
36DXX	-36-XX	-75A	1.625	1.250		2.469	2.770	7.688
36EXX	-36-XX	-146A	1.840	1.437		2.469	3.020	7.750
36FXX	-36-XX	-132A	.750	.500		2.469	1.551	7.000
36GXX	-36-XX	-148A	.937	.625	2.250-16UN	2.469	1.770	7.062
40AXX	-40-XX	-79A	1.250	.875	2.500-16UN	2.719	2.113	7.312
40BXX	-40-XX	-81A	1.375	1.000		2.719	2.363	7.438
40DXX	-40-XX	-83A	1.625	1.250		2.719	2.770	7.688
40EXX	-40-XX	-85A	1.840	1.437		2.719	3.020	7.750
40FXX	-40-XX	-134A	.750	.500	2.500-16UN	2.719	1.551	7.000
44AXX	-44-XX	-87A	1.250	.875	2.750-16UN	2.969	2.113	7.312
44BXX	-44-XX	-89A	1.375	1.000		2.969	2.363	7.438
44DXX	-44-XX	-91A	1.625	1.250		2.969	2.770	7.688
44EXX	-44-XX	-93A	1.840	1.437		2.969	3.020	7.750
44FXX	-44-XX	-154A	.337	.625	2.750-16UN	2.969	1.770	7.062
48AXX	-48-XX	-95A	1.250	.375	3.000-16UN	3.219	2.113	7.312
48BXX	-43-XX	-97A	1.375	1.000		3.219	2.363	7.438
48DXX	-43-XX	-99A	1.625	1.250		3.219	2.770	7.688
MS3406D 48EXX	MS3406D -43-XX	MS3437B -101A	1.840	1.437	3.000-16UN	3.219	3.020	7.750

User activities:

Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

APPROVED 7 Nov 69 REVISED (H) FOR CHANGES SEE SHEET 3

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, PLUG, ELECTRIC, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3406(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 5 OF 6

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

User activities:


Review activities:

This military standard is approved for use by Naval Air Systems Command, NAVY AS , Department of the Navy , and is available for use by all Departments and Agencies of the Department of Defense.

SUPERSESSION DATA

Buships Dwg. RE49D2042 Part number	Superseded by Part number
10-214610-**	MS3406DJ10A**
611-**	11A**
612-**	13A**
613-**	12A**
614-**	15A**
615-**	14A**
616-**	17E**
617-**	16E**
618-**	18A**
620-**	20B**
622-**	22B**
624-**	24D**
628-**	28B**
632-**	32B**
636-**	36B**
640-**	40D**
10-214644-**	MS3406DJ44E**

EXAMPLE OF PART NO.: MS3406DJ 18A11PY

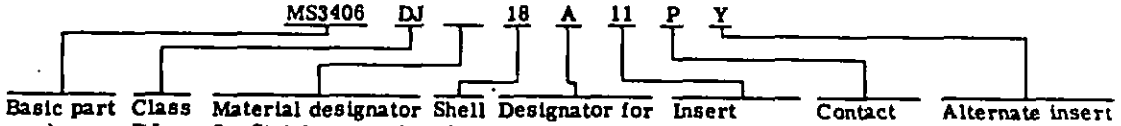

Basic part number	Class DJ	Material designator S - Stainless steel. Leave blank for aluminum alloy.	Shell size	Designator for sealing range of MS3437 backshell.	Insert arrangement	Contact designator	Alternate insert position W, X, Y or Z - Leave blank for normal position.

APPROVED 7 Nov 69 REVISED (H) FOR CHANGES SEE SHEET 3

P.A Navy - AS Other Cust	International interest	TITLE CONNECTORS, PLUG, ELECTRIC, FRONT RELEASE, CRIMP CONTACT, AN TYPE	MILITARY STANDARD MS3406(NAVY)
Procurement Specification MIL-C-5015		SUPERSEDES:	PAGE 6 OF 6

DD FORM 1 MAY 73 672 *(Limited coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/1721

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.