


FED. SUP CLASS
1680

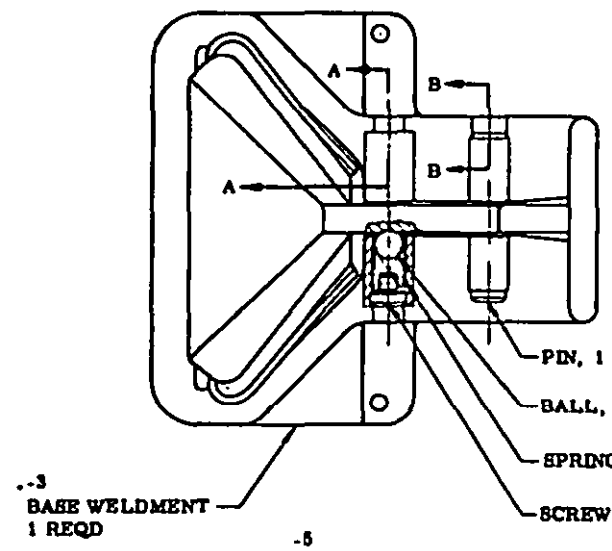





SECTION A-A (ENLARGED)



SECTION B-B (ENLARGED)

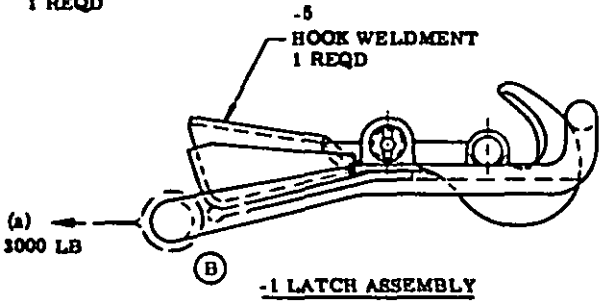



(B) -1 LATCH ASSEMBLY

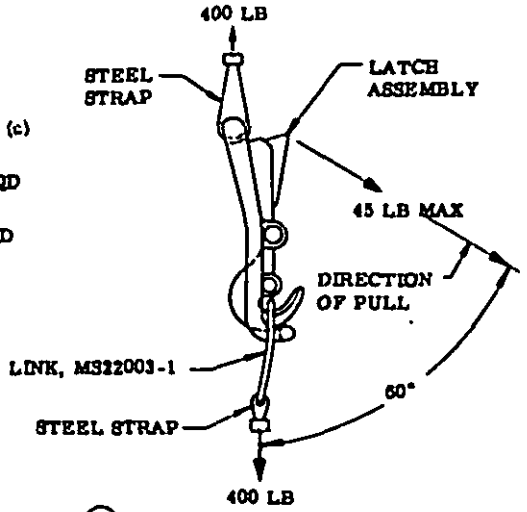

(B) (b) QUICK RELEASE TEST

(FOR -1 AND -2 LATCH ASSEMBLY)

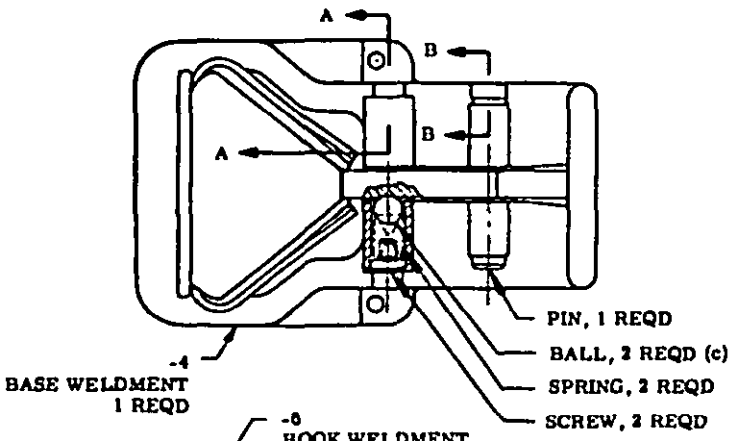

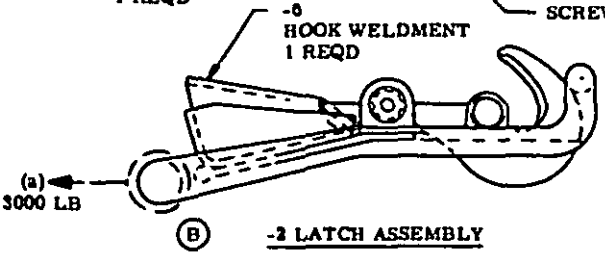

(B) -2 LATCH ASSEMBLY

-2 LATCH ASSEMBLY INACTIVE FOR DESIGN

(B) DENOTES CHANGES

APPROVED 3 JULY 1969 REVISED (A) 19 AUG 1970 (B) 19 NOV 1980

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. NAVY - AS Other Cust ARMY - AV AF - 99	TITLE LATCH, LAP BELT, AIRCRAFT SAFETY, QUICK RELEASE	MILITARY STANDARD MS3488 (B)
PROCUREMENT SPECIFICATION	SUPERSEDES: ACEL 5-782 & 62A133D1	SHEET 1 OF 7


DD FORM 1 MAR 72 672-1 (Coordinated) (B)


PLATE NO. 22371

PROJECT NO. 1680-0475


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
1680

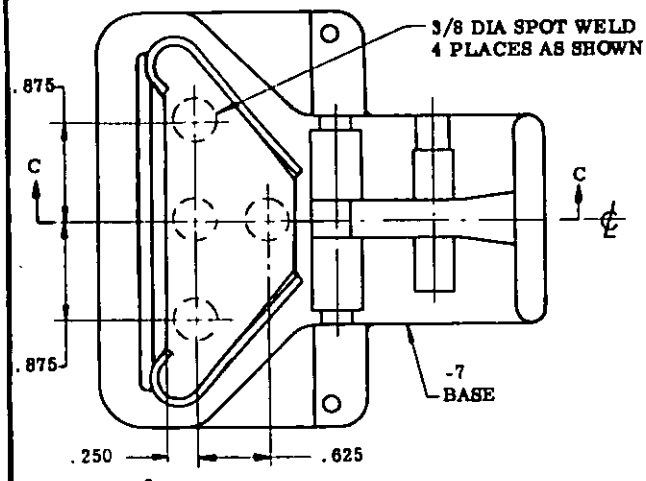


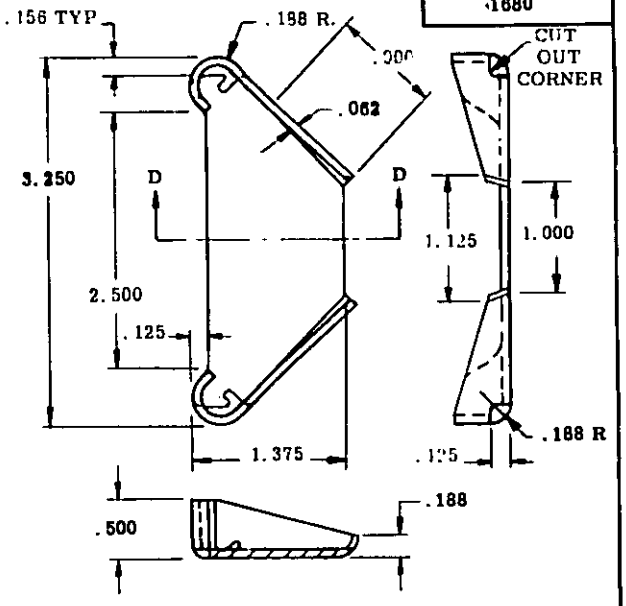


SECTION D-D
-8 PLATE, GUARD (B)

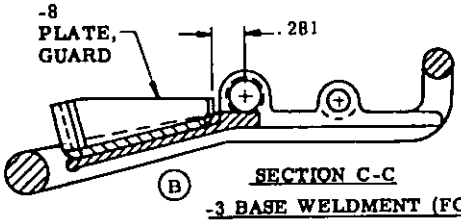

(B) SECTION C-C
-3 BASE WELDMENT (FOR -1 ASSY)

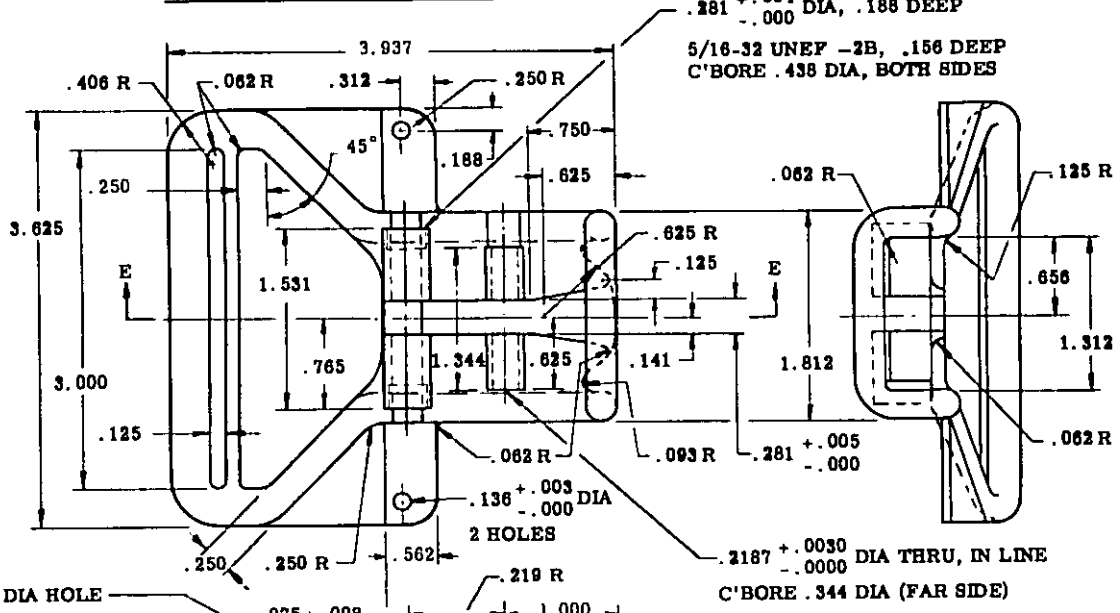

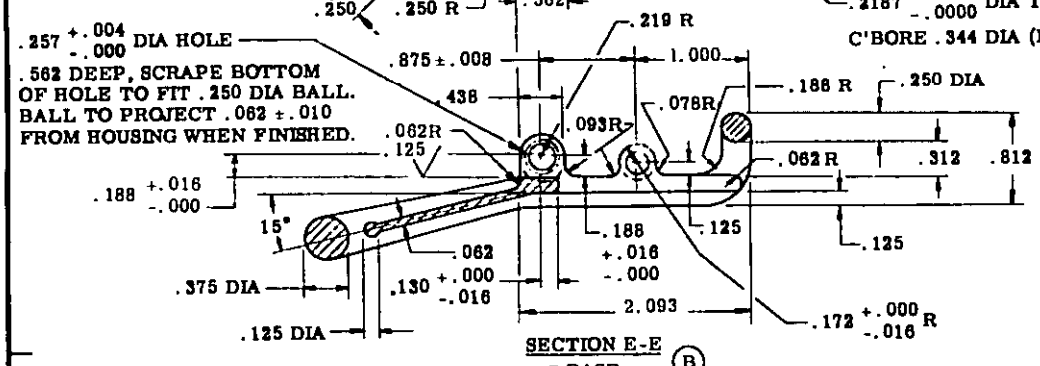

SECTION E-E
-7 BASE (B)

APPROVED 3 July 1969 REVISED (B) FOR CHANGES SEE SHEETS 1, 2, 3, 5, 6 & 7


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A. NAVY - AS Other Cust ARMY - AV AF - 99	TITLE LATCH, LAP BELT, AIRCRAFT SAFETY, QUICK RELEASE	MILITARY STANDARD MS3488 (B)
PROCUREMENT SPECIFICATION	SUPERSEDES ACEL 5-782 & 62A133D1	SHEET 2 of 7

DD FORM 1 SEP 67 672-1 (Coordinated) (B)


PLATE NO 17709

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.

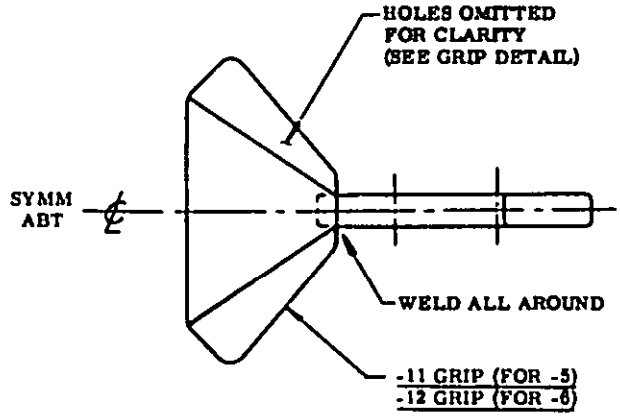

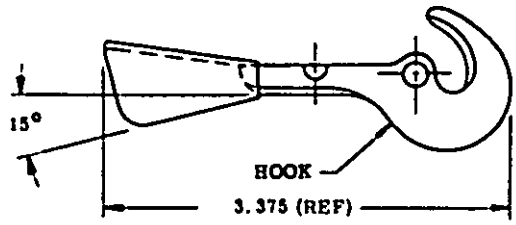

Ⓑ -5 HOOK WELDMENT (-1 ASSY)
-6 HOOK WELDMENT (-2 ASSY)

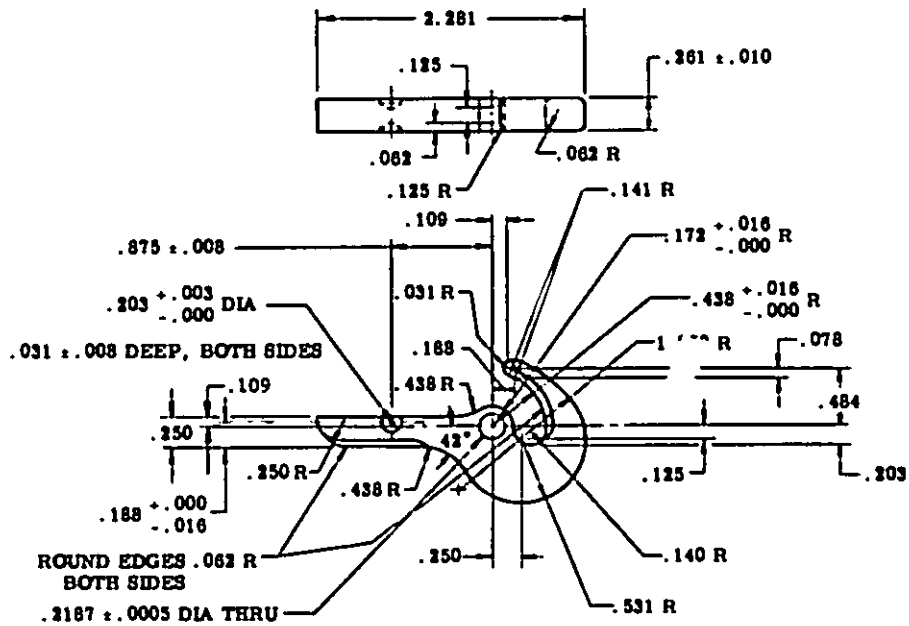

HOOK


APPROVED 3 July 1969 REVISED Ⓑ FOR CHANGES SEE SHEETS 1, 2, 3, 5, 6 & 7

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A. NAVY - AS Other Cogs ARMY - AV AF - 99	TITLE LATCH, LAP BELT, AIRCRAFT SAFETY, QUICK RELEASE	MILITARY STANDARD MS3488 Ⓑ
PROCUREMENT SPECIFICATION	SUPERSEDES ACEL 5-782 & 62A133D1	SHEET 3 OF 7

DD FORM 672-1 (Continued) Ⓑ

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.

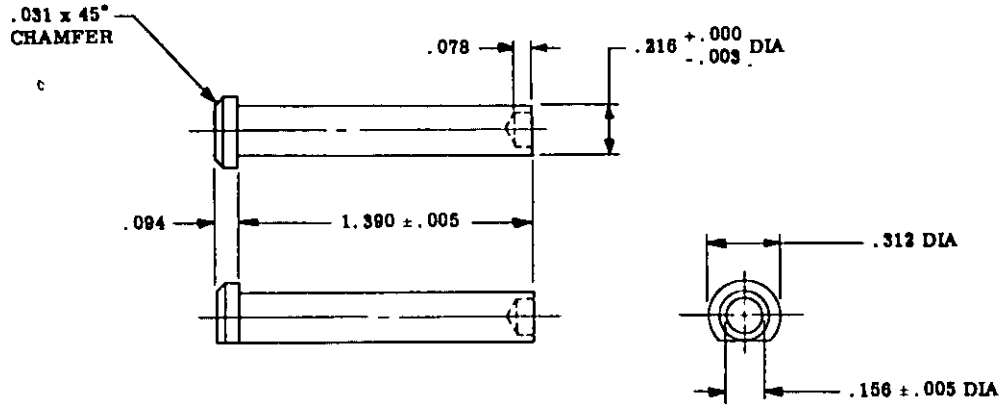


PIN

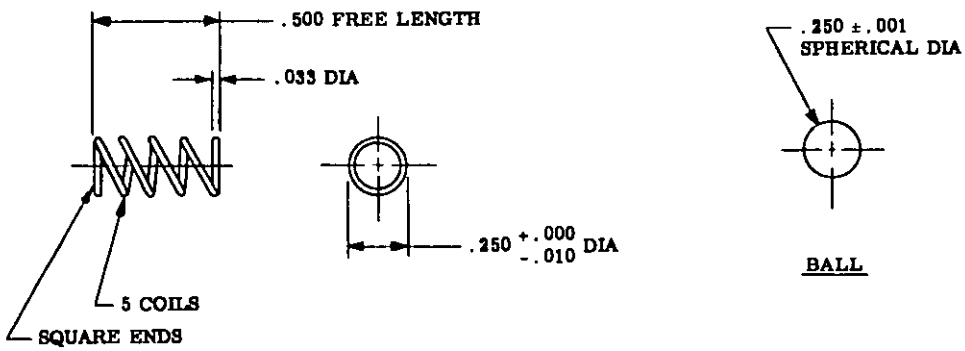

SPRING

BALL

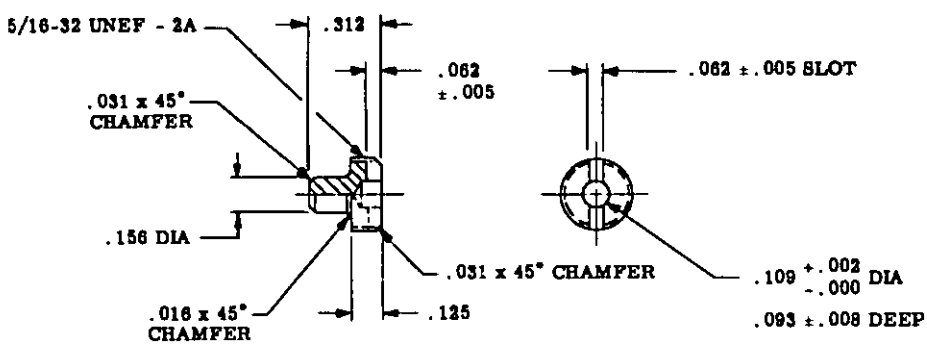

SCREW


APPROVED 3 July 1969 REVISED (B) FOR CHANGES SEE SHEETS 1, 2, 3, 5, 6 & 7


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. NAVY - AS Other Cust ARMY - AV AF - 99	TITLE LATCH, LAP BELT, AIRCRAFT SAFETY, QUICK RELEASE	MILITARY STANDARD MS3488 (B)
PROCUREMENT SPECIFICATION	SUPERSEDES: ACEL 5-782 & 62A133D1	SHEET 4 OF 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23113:07Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
1680

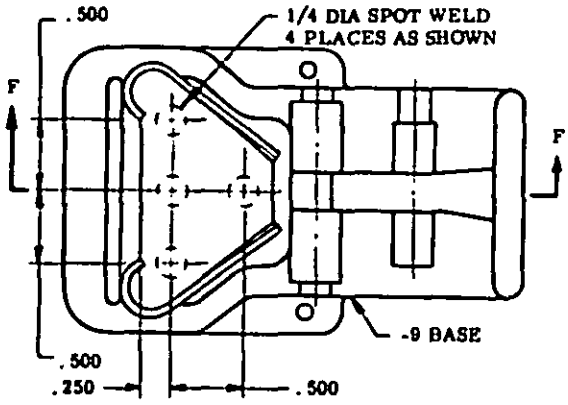

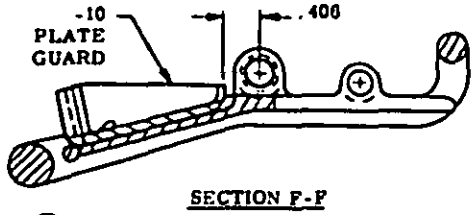


SECTION F-F


(B) -4 BASE WELDMENT (FOR -2 ASSY)

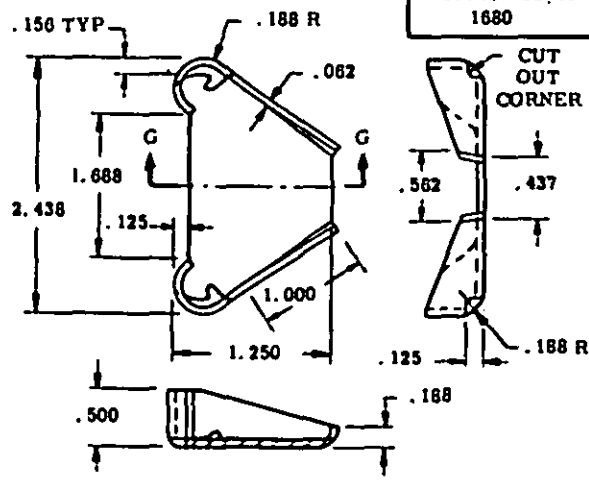


SECTION G-G

-10 PLATE GUARD (B)

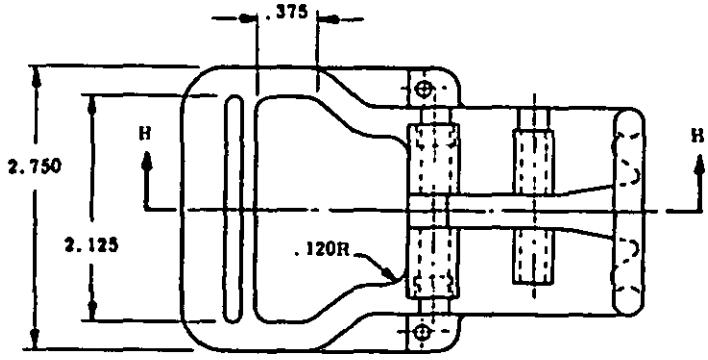



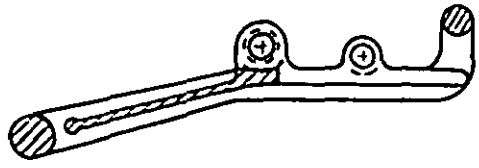

SECTION H-H

-9 BASE (B)

-9 BASE SIMILAR TO -7 BASE (SHEET #2) EXCEPT AS SHOWN
FOR SIMILAR DIMENSIONS NOT SHOWN SEE -7 BASE (SHEET #2)

APPROVED 3 JULY 1969 REVISED (B) FOR CHANGES SEE SHEETS 1, 2, 3, 5, 6 & 7

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A. NAVY - AS Other Cust ARMY - AV AF - 99	TITLE LATCH, LAP BELT, AIRCRAFT SAFETY, QUICK RELEASE	MILITARY STANDARD MS3488 (B)
PROCUREMENT SPECIFICATION	SUPERSEDES: ACEL 5-782 & 62A153D1	SHEET 5 OF 7

DD FORM 1 MAR 72 672-1 (Coordinated) (B)


PLATE NO. 23371

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
1680

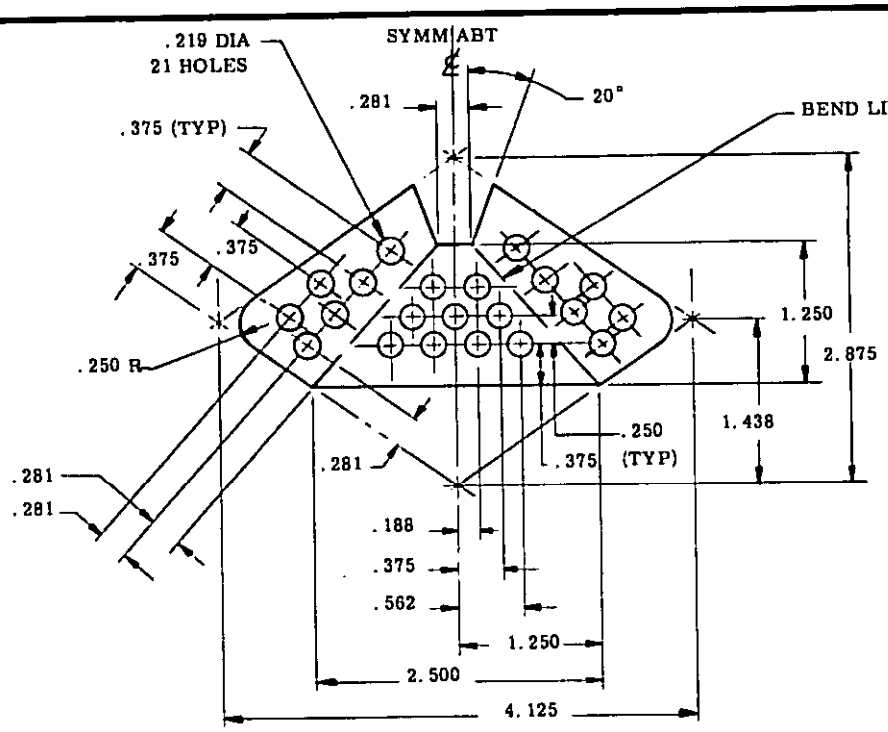

(B) -11 GRIP (FLAT LAYOUT)

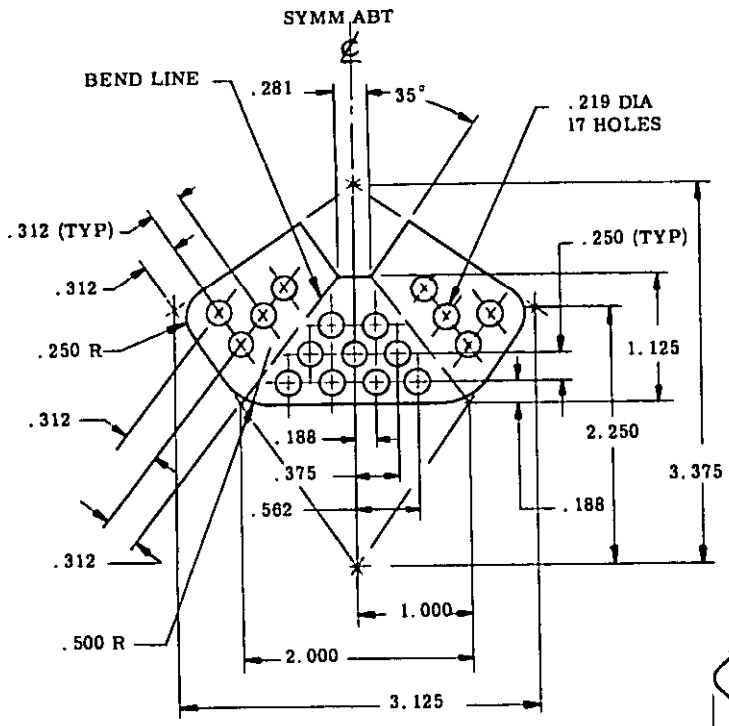

(B) -12 GRIP (FLAT LAYOUT)

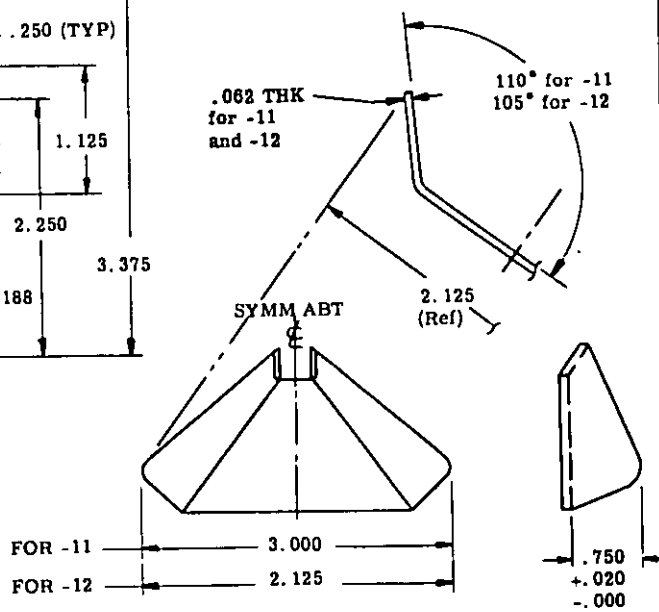

(B) -11 GRIP (FORMED PIECE)
-12 GRIP (FORMED PIECE)

APPROVED 3 JULY 1969 REVISED (B) FOR CHANGES SEE SHEETS 1, 2, 3, 5, 6 & 7

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. NAVY - AS Other Cust ARMY - AV AF - 99	TITLE LATCH, LAP BELT, AIRCRAFT SAFETY, QUICK RELEASE	MILITARY STANDARD MS3488 (B)
PROCUREMENT SPECIFICATION	SUPERSEDES: ACEL 5-782 & 62A133D1	SHEET 6 OF 7

DD FORM 1 MAR 72 672-1 (Coordinated) (B)

PLATE NO. 23071

Source: https://assist.dla.mil -- Downloaded: 2026-10-23113:07Z
Check the source to verify that this is the current version before use.

(B)

NOTES:

1. MATERIAL: (A) BASE; HOOK: HOT FORGED STEEL, IN ACCORDANCE WITH MIL-S-5626 OR MIL-S-6049.
(B) PLATE GUARD; GRIP: STEEL PLATE, IN ACCORDANCE WITH MIL-S-18729.
(C) BALL; STEEL, COMPOSITION 3, GRADE 200, IN ACCORDANCE WITH MIL-B-1083.
(D) SPRING; STEEL WIRE, IN ACCORDANCE WITH QQ-W-470.
(E) SCREW; STEEL, IN ACCORDANCE WITH QQ-S-637.
(F) PIN; CORROSION RESISTANT STEEL, COMPOSITION 316, CONDITION B, IN ACCORDANCE WITH MIL-S-7720. CERTIFIED CHEMICAL AND PHYSICAL ANALYSIS REQUIRED. 125,000 TO 130,000 PSI.

2. FINISH: BASE; HOOK; PLATE GUARD; GRIP; SPRING: CADMIUM PLATE, TYPE I, CLASS 1, IN ACCORDANCE WITH QQ-P-416.

3. THREADS: THREADS SHALL CONFORM TO MIL-S-7742 AND HANDBOOK H28.

4. HEAT TREAT: BASE; HOOK: ROCKWELL C38 TO C42 IN ACCORDANCE WITH MIL-H-6875. DECARBURIZATION SHALL NOT EXCEED .010.

5. BREAK ALL SHARP EDGES .031 MAX.

6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.

7. PROOF LOAD: (a) EACH LATCH ASSEMBLY SHALL BE SUBJECTED TO THE PROOF LOAD SPECIFIED HEREON AS INDICATED BY THE ARROW, WHEN ASSEMBLED WITH LINK MS22003-1. PROOF LOAD TO BE APPLIED AT THE RATE OF 30,000 PSI PER MINUTE, PER QQ-M-151.
(b) WHEN ASSEMBLED WITH LINK MS22003-1 AND A LOAD OF 400 POUNDS IS APPLIED IN A TENSION TESTING MACHINE, USING SHORT STEEL STRAPS TO APPLY THE LOAD, IT SHALL BE POSSIBLE TO OPEN THE LATCH BY A FORCE NOT TO EXCEED 45 POUNDS APPLIED AT 60° TO THE DIRECTION OF THE 400 POUND PULL, AS SHOWN.
(c) WITHOUT LOAD ON THE LATCH ASSEMBLY AND WITHOUT LUBRICATION, THE FORCE REQUIRED TO PULL THE LATCH THRU THE BALL DETENT SHALL BE NOT LESS THAN 6 NOR MORE THAN 8 POUNDS.

8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. NAVY - AS Other Cust ARMY - AV AF - 99	TITLE LATCH, LAP BELT, AIRCRAFT SAFETY, QUICK RELEASE	MILITARY STANDARD MS3488 (B)
PROCUREMENT SPECIFICATION	SUPERSEDES: ACEL 5-782 & 62A133D1	SHEET 7 OF 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.