
FED. SUP CLASS
5315

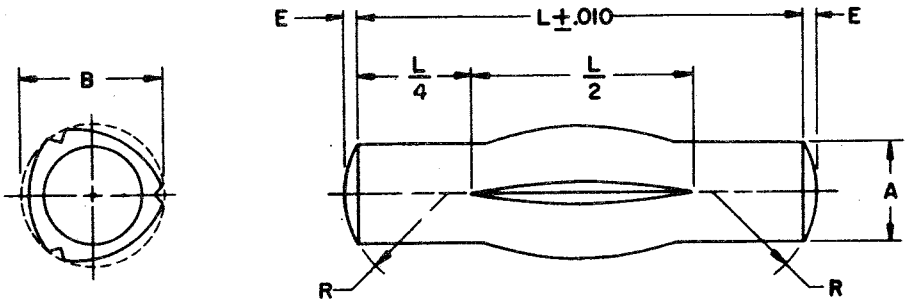

NOMINAL SIZE		1/16	5/64	3/32	1/8	5/32
A DIAMETER	MAX	.0625	.0781	.0938	.1250	.1563
	MIN	.0615	.0771	.0928	.1230	.1543
E *CROWN HEIGHT	REF	.0065	.0087	.0091	.0130	.0170
R RADIUS	MAX	.0881	.1037	.1350	.1662	.1975
	MIN	.0681	.0837	.1150	.1462	.1775
RECOMMENDED HOLE SIZE	MAX	.0640	.0798	.0956	.1271	.1587
	MIN	.0625	.0781	.0938	.1250	.1563
SINGLE SHEAR STRENGTH - LBS	MIN	200	310	440	790	1230

L LENGTH	DASH NO.	B DIA. ±.001	DASH NO.	B DIA. ±.001	DASH NO.	B DIA. ±.001	DASH NO.	B DIA. ±.002	DASH NO.	B DIA. ±.002
1/4	1	.068								
3/8	2	.068	6	.084	10	.101	15	.134		
1/2	3	.068	7	.084	11	.101	16	.134	22	.166
5/8	4	.068	8	.084	12	.101	17	.134	23	.166
3/4	5	.068	9	.084	13	.101	18	.134	24	.166
1					14	.101	19	.134	25	.166
1-1/4							20	.134	26	.166
1-1/2							21	.134	27	.166

For additional sizes see sheet 2.

MATERIAL: Steel, cold-drawn, B1112 or 1212, in accordance with the procurement specification.
PROTECTIVE COATING: Cadmium plate in accordance with the procurement specification.
APPLICATION: Grooved pins are locked securely in place by elastic deformation eliminating the need for tapping or reaming of tapered or sized holes.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS35677-1.
NOTES: (1) Dash numbers for cadmium plated pins as shown on this revised standard are the same as the dash numbers for the cadmium or zinc plated (optional) pins shown on the original standard.
(2) Diameter"B" is the expanded diameter as measured with a ring gage.
*(3) Ends of pins may be square with .01-inch to .02-inch radius on the edges.
(4) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(5) Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 11 JAN 56 REVISED Ⓐ 17 MAR 1965

REVIEWER: MI, MO, MU, WC, SH, WP, 69, IS
USER: MC, YD, NSA

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	WP 69

TITLE
PIN, GROOVED, HEADLESS-LONGITUDINAL CENTER GROOVE, CARBON STEEL

MILITARY STANDARD
MS 35677

PROCUREMENT SPECIFICATION: MIL-P-20700
SUPERSEDES: BFCX4.1 and in part AEGX2
SHEET 1 OF 2

DD FORM SEP 67 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:26Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5315

NOMINAL SIZE		3/16		7/32		1/4		3/8			
A DIAMETER	MAX MIN	.1875 .1855		.2188 .2168		.2500 .2480		.3750 .3730			
E *CROWN HEIGHT	REF	.0180		.0220		.0260		.0390			
R RADIUS	MAX MIN	.2600 .2400		.2912 .2712		.3225 .3025		.4787 .4587			
RECOMMENDED HOLE SIZE	MAX MIN	.1903 .1875		.2219 .2188		.2534 .2500		.3797 .3750			
SINGLE SHEAR STRENGTH - LBS	MIN	1770		2400		3140		7070			
L LENGTH		DASH NO.	B DIA. ±.002	DASH NO.	B DIA. ±.002	DASH NO.	B DIA. ±.002	DASH NO.	B DIA. ±.002	DASH NO.	B DIA. ±.002
1/2		28	.198								
5/8		29	.198	36	.230	43	.263				
3/4		30	.198	37	.230	44	.263	51	.394		
1		31	.198	38	.230	45	.263	52	.394		
1-1/4		32	.198	39	.230	46	.263	53	.394		
1-1/2		33	.198	40	.230	47	.263	54	.394		
1-3/4		34	.198	41	.230	48	.263	55	.394		
2		35	.198	42	.230	49	.263	56	.394		
2-1/4						50	.263	57	.394		
2-1/2								58	.394		
2-3/4								59	.394		

*See Note (3), sheet 1.
For illustration, material, protective coating, and other pertinent data see sheet 1.

REVIEWER: MI, MO, MU, WC, SH, WP, 69, IS
USER: MC, YD, NSA

APPROVED 11 JAN 56 REVISED (A) FOR CHANGES SEE SHEET 1.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust WP 69	TITLE PIN, GROOVED, HEADLESS - LONGITUDINAL CENTER GROOVE, CARBON STEEL	MILITARY STANDARD MS 35677	
PROCUREMENT SPECIFICATION MIL-P-20700	SUPERSEDES: BFCX4.1 and in part AEGX2	SHEET 2 OF	

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T17:26Z
Check the source to verify that this is the current version before use.