
FED. SUP CLASS
2805

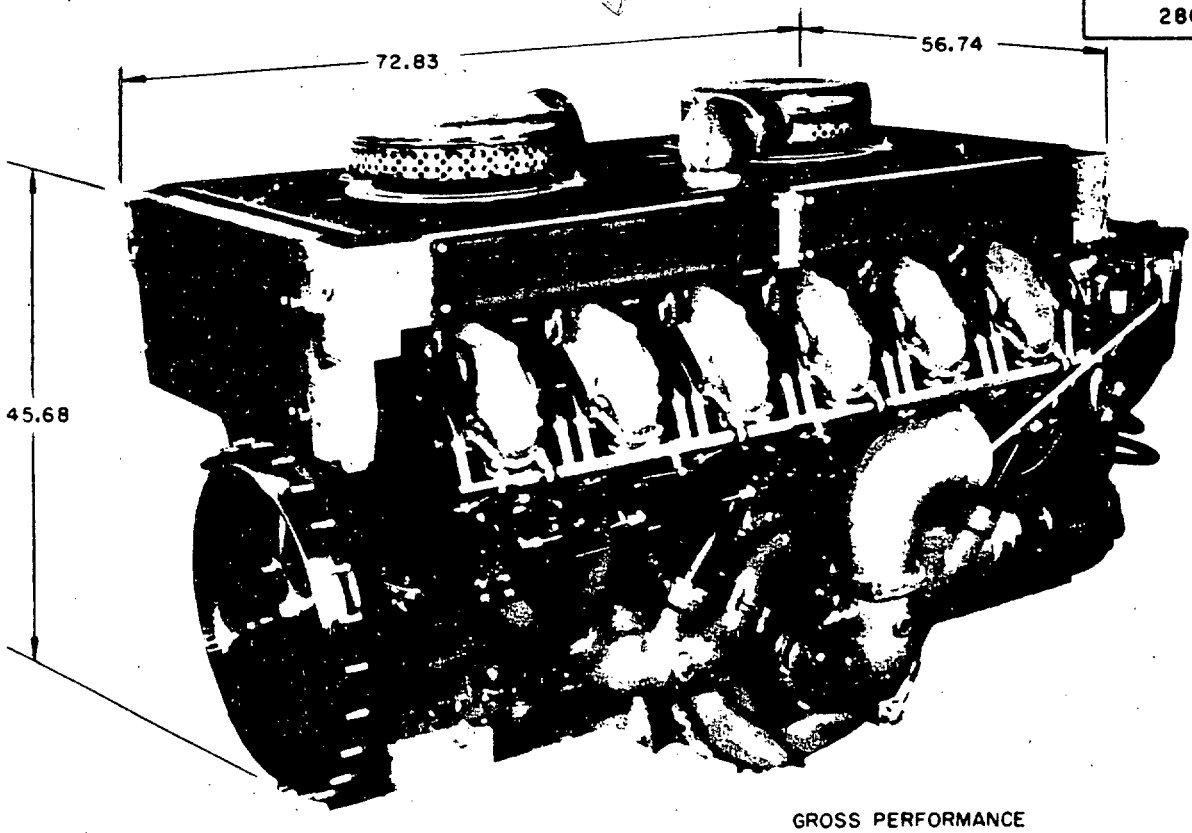

ENGINE CHARACTERISTICS:


NUMBER OF CYLINDERS	12
BORE AND STROKE, INCHES	5.75 x 5.75
DISPLACEMENT, CUBIC INCHES	1790
COMPRESSION RATIO	5.5:1
TORQUE, MAX. LB FT AT 2000 RPM AT FLYWHEEL STANDARD CONDITIONS	1900
BHP, AT 2800 RPM, STANDARD CONDITIONS	100
INDUCTION SYSTEM	SUPER
IGNITION SYSTEM	
GENERATOR	
FUEL SYSTEM	
WEIGHT, DRY	

* IN AA CO

(B) CANCELLED AFTER 16 FEB 1988. NO SUPERSEDING STANDARD.

, AND

GROSS PERFORMANCE

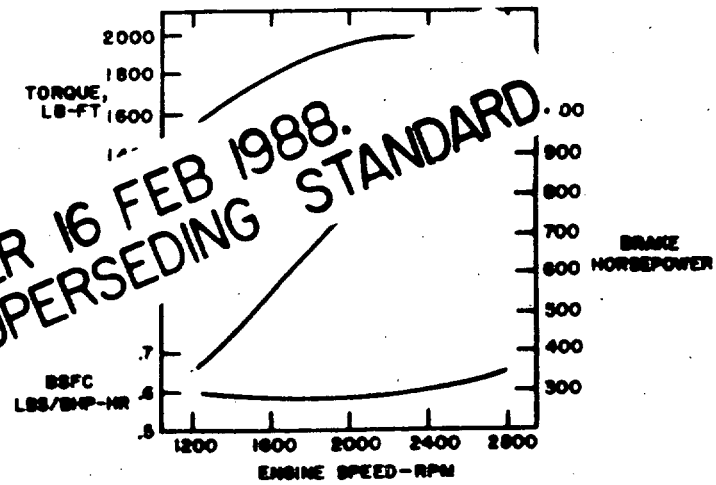

NOTES:

1. THIS ENGINE SHALL CONFORM TO 90 DEGREE V TYPE, 1,020 BHP WITH FUEL INJECTION, SUPERCHARGED CLASSIFICATION OF MIL-E-45162.
2. ALL THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.
3. DIMENSIONS SHOWN ARE IN INCHES AND ARE FOR ENGINEERING REFERENCE ONLY.
4. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION AND SHALL BE IN ACCORDANCE WITH MIL-STD-130.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. DRAWINGS AND OTHER INFORMATION PERTAINING TO THIS ENGINE ARE AVAILABLE FROM THE U.S. ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICHIGAN 48090.

SEE SHEETS 3 AND 4 FOR MOUNTING DIMENSIONS

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING PARTS LIST
MS 51313 -1	8365416

APPROVED 26 MAY 1959 REVISED (A) 6 SEPTEMBER 1966 (B) 16 FEB 1988


REVIEW ACTIVITIES: AF-82, 85; DSA-CS
USER ACTIVITIES: ARMY-AV; NAVY-MC

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. ARMY-AT Other Cust NAVY-MC AF-82	TITLE ENGINE, GASOLINE: AIR COOLED, 1790 CU IN DISPL, 4 STROKE CYCLE, RECIPROCATING, AUTOMOTIVE	MILITARY STANDARD MS 51313
PROCUREMENT SPECIFICATION MIL-E-45162	SUPERSEDES	SHEET 1 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2805

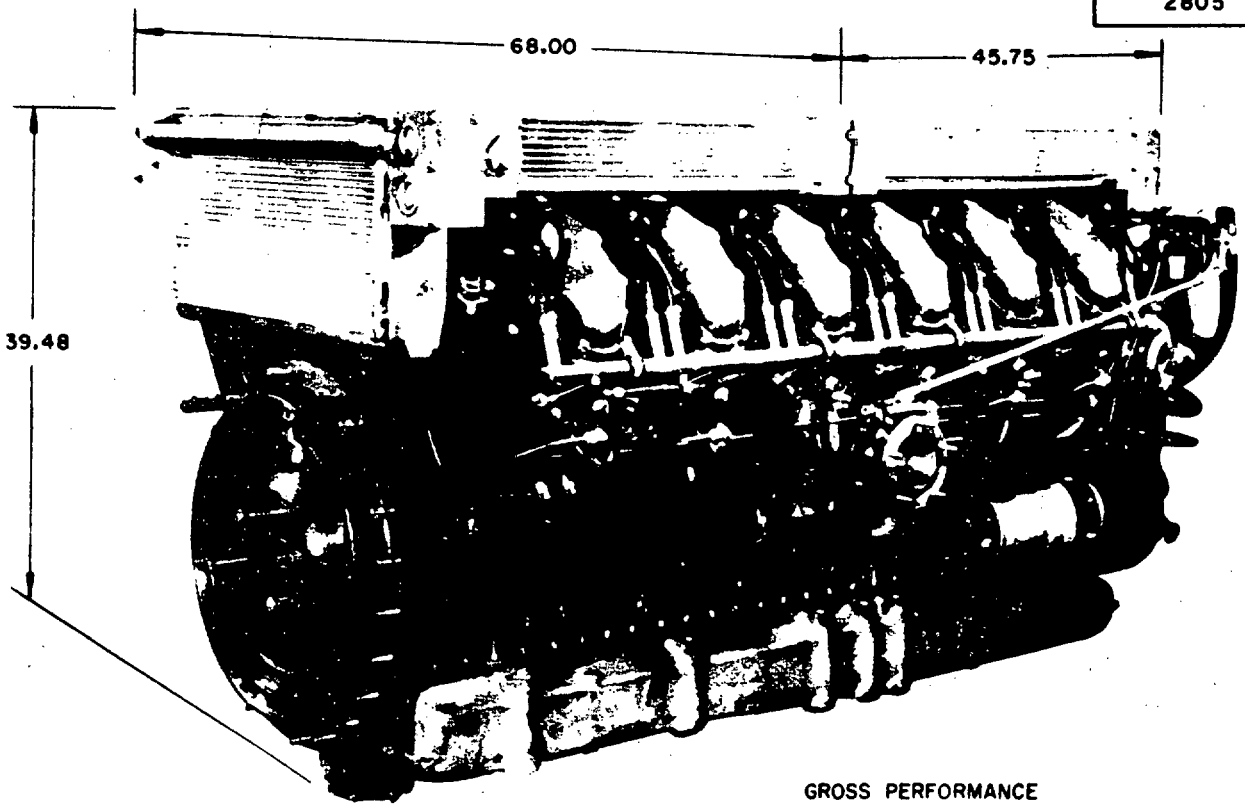

GROSS PERFORMANCE

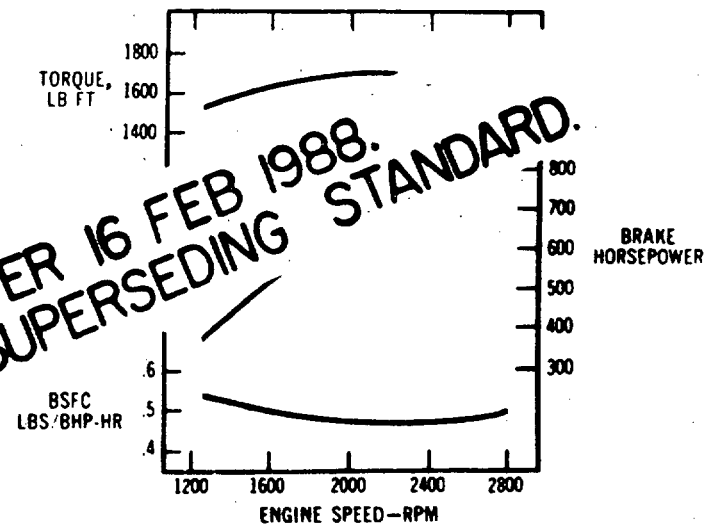

ENGINE CHARACTERISTICS:

NUMBER OF CYLINDERS	12
BORE AND STROKE, INCHES	5.75 x 5.75
DISPLACEMENT, CUBIC INCHES	1790
COMPRESSION RATIO	6.5:1
TORQUE, MAX. LB FT AT 2000 RPM AT FLYWHEEL STANDARD CONDITIONS	1600
BHP, AT 2800 RPM, STANDARD CONDITIONS	[illegible]
INDUCTION SYSTEM	NATURAL [illegible]
IGNITION SYSTEM	
GENERATOR	
FUEL SYSTEM	
WEIGHT, DRY*	

* INCL COOL. ACCES [illegible] OIL [illegible] TOR.

(B) CANCELLED AFTER 16 FEB 1988. NO SUPERSEDING STANDARD.

NOTES:

1. THIS ENGINE SHALL CONFORM TO 90 DEGREE V TYPE, 810 BHP, FUEL INJECTION CLASSIFICATION OF MIL-E-45162.
2. ALL THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.
3. DIMENSIONS SHOWN ARE IN INCHES AND ARE FOR ENGINEERING REFERENCE ONLY.
4. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION AND SHALL BE IN ACCORDANCE WITH MIL-STD-130.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. DRAWINGS AND OTHER INFORMATION PERTAINING TO THIS ENGINE ARE AVAILABLE FROM THE U.S. ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICHIGAN 48090.

SEE SHEETS 3 AND 4 FOR MOUNTING DIMENSIONS

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING PARTS LIST
MS 51313 -2	8380568

APPROVED 26 MAY 1959 REVISED (A) 6 SEP 1966 (B) 16 FEB 1988

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A. ARMY-AT
Other Cust
NAVY- MC
AF-82

PROCUREMENT SPECIFICATION
MIL-E-45162

TITLE
ENGINE, GASOLINE: AIR COOLED, 1790 CU IN DISPL, 4 STROKE CYCLE, RECIPROCATING, AUTOMOTIVE

SUPERSEDES

MILITARY STANDARD
MS 51313


SHEET 2 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.


DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

STANDARD MOUNTING DIMENSIONS FOR ENGINE MS 51313-1 AND MS 51313-2

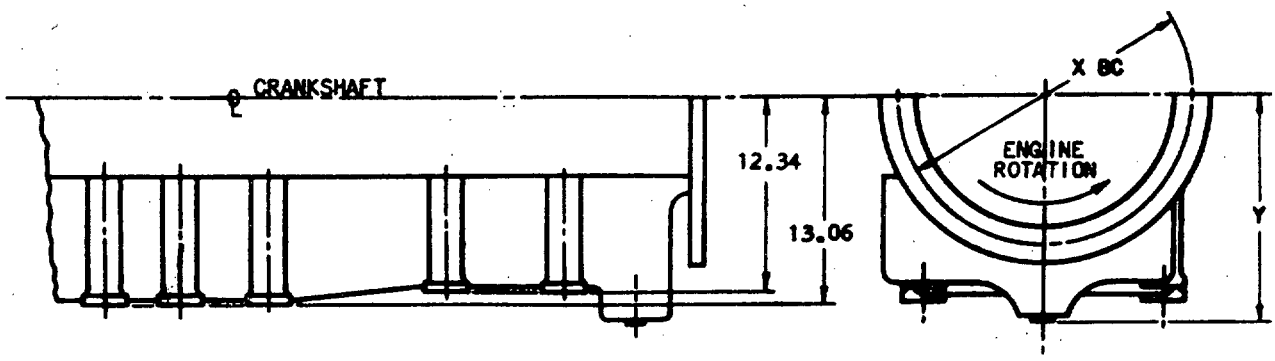

TRANSMISSION END FOR MOUNTING HOLE DIMENSIONS SEE SHEET 4

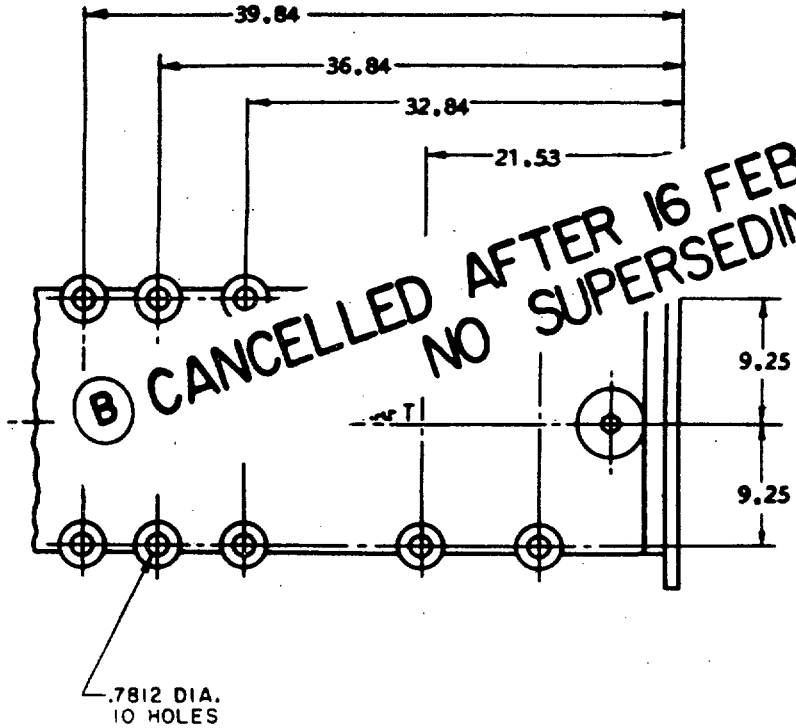

(B) CANCELLED AFTER 16 FEB 1988. NO SUPERSEDING STANDARD.

MS PART NO.	X	Y
MS 51313-1	23.120	18.27
MS 51313-2	22.798	18.27

(A) ENTIRE STANDARD REVISED


APPROVED 26 MAY 1959 REVISED (A) 6 SEP 1966 (B) 16 FEB 1988

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust NAVY-MC AF-82	TITLE ENGINE, GASOLINE: AIR COOLED, 1790 CU IN DISPL, 4 STROKE CYCLE, RECIPROCATING, AUTOMOTIVE	MILITARY STANDARD MS 51313
PROCUREMENT SPECIFICATION MIL-E-45162	SUPERSEDES	SHEET 3 OF 4


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2805

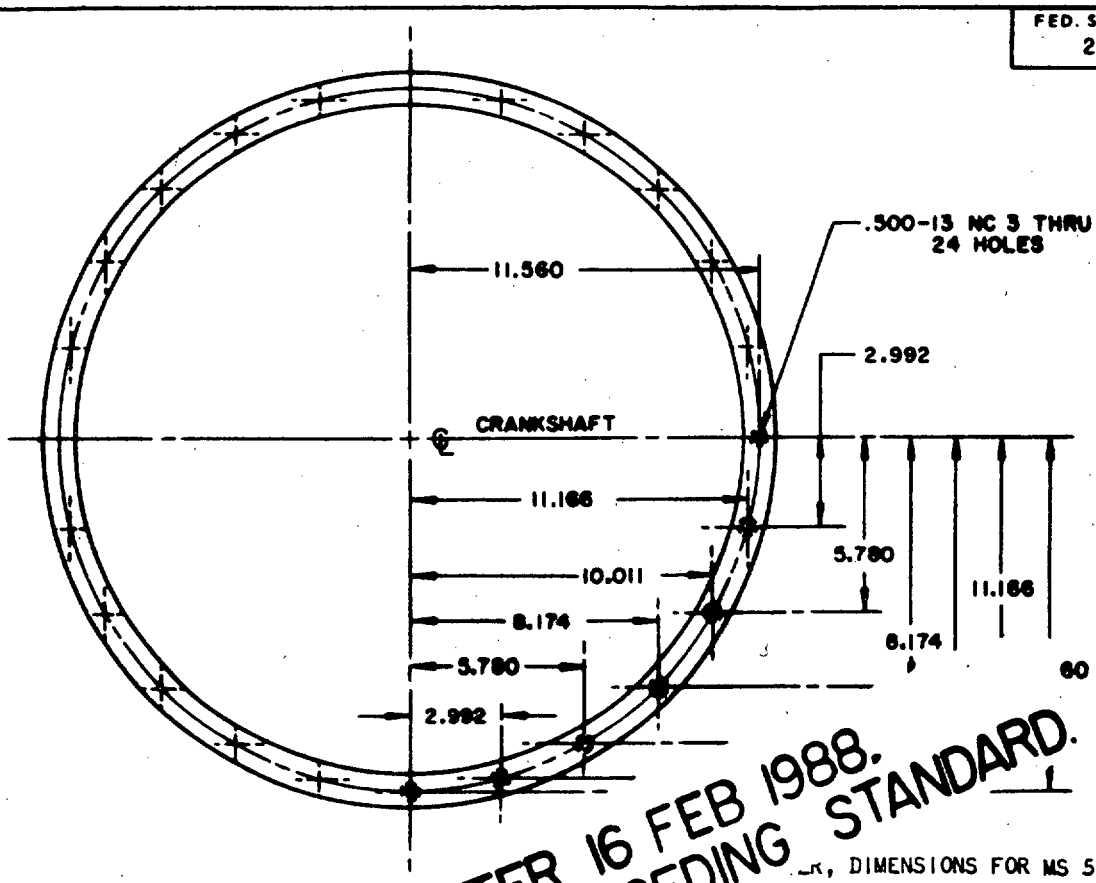

Ⓑ CANCELLED AFTER 16 FEB 1988.
NO SUPERSEDING STANDARD.

TRANSMISSION, CASE, ADAPTER, DIMENSIONS FOR MS 51313-1

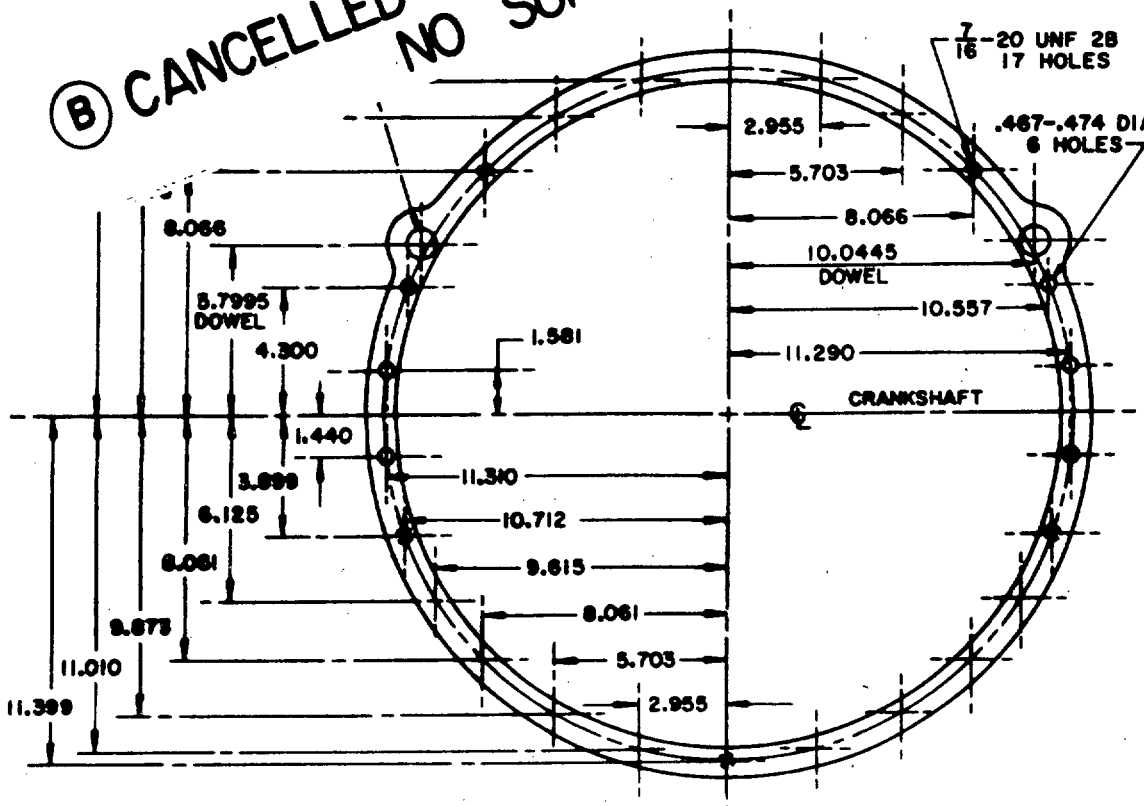

TRANSMISSION, CASE, ADAPTER, DIMENSIONS FOR MS 51313-2

Ⓐ ENTIRE STANDARD REVISED

APPROVED 26 MAY 1959 REVISED Ⓐ 6 SEP 1966 Ⓑ 16 FEB 1988

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust NAVY-MC AF-82	TITLE ENGINE, GASOLINE: AIR COOLED, 1790 CU IN DISPL, 4 STROKE CYCLE, RECIPROCATING, AUTOMOTIVE	MILITARY STANDARD MS51313
PROCUREMENT SPECIFICATION MIL-E-45162	SUPERSEDES	SHEET 4 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.