INCH-POUND

MS51508C
27 October 2016
SUPERSEDING
MS51508B
14 December 2015


DETAIL SPECIFICATION SHEET

# ELBOW, PIPE TO TUBE, 45 DEGREE, MALE PIPE END, 37 DEGREE FLARED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design after 17 August 1999. For new design, use SAE-J514.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

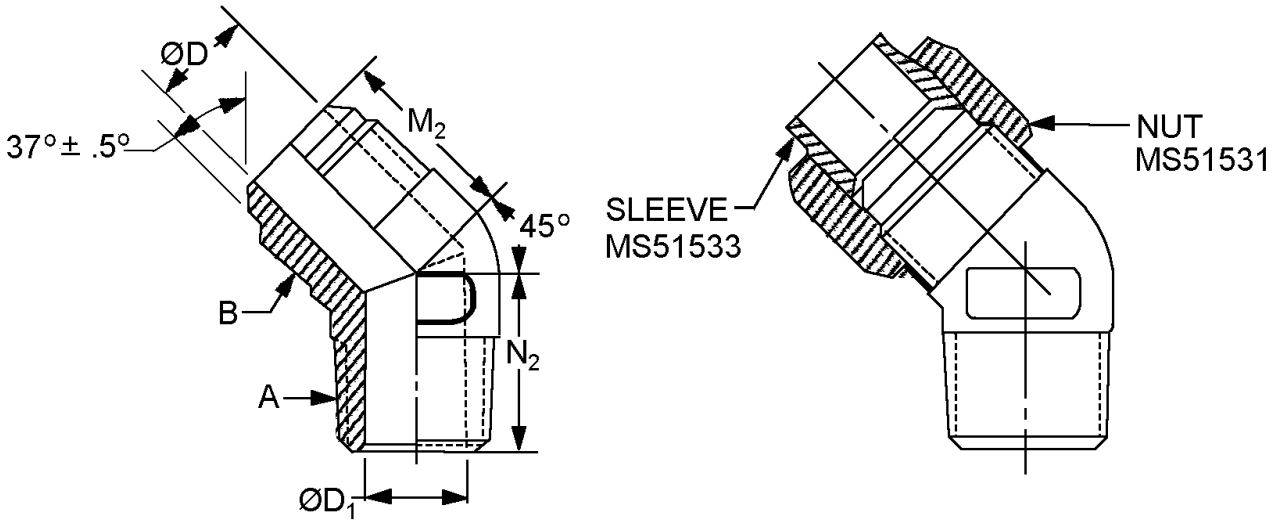


See notes at end of figure.

FIGURE 1. Elbow, pipe to tube 45°.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

| Suffix designator | | Tube OD nom. | A Thread NPTF | B Straight thread | D diameter | |
|---|---|---|---|---|---|---|
| Assembly (see note 4) | Body | | | | Basic inches (mm) | Tolerance inches (mm) |
| A2 | B2 | .1250 (3.175) | 1/8 - 27 | .3125-24 UNF-2A | .062 (1.57) | ±.003 (0.08) |
| A3 | B3 | .1875 (4.763) | 1/8 - 27 | .3750-24 UNF-2A | .125 (3.18) | |
| A4 | B4 | .2500 (6.350) | 1/8 - 27 | .4375-20 UNF-2A | .172 (4.37) | |
| A4-4 | B4-4 | .2500 (6.350) | 1/4 - 18 | .4375-20 UNF-2A | .172 (4.37) | |
| A5 | B5 | .3125 (7.938) | 1/8 - 27 | .5000-20 UNF-2A | .234 (5.94) | |
| A5-4 | B5-4 | .3125 (7.938) | 1/4 - 18 | .5000-20 UNF-2A | .234 (5.94) | |
| A6-2 | B6-2 | .3750 (9.525) | 1/8 - 27 | .5625-18 UNF-2A | .297 (7.54) | ±.004 (0.10) |
| A6 | B6 | .3750 (9.525) | 1/4 - 18 | .5625-18 UNF-2A | .297 (7.54) | |
| A6-6 | B6-6 | .3750 (9.525) | 3/8 - 18 | .5625-18 UNF-2A | .297 (7.54) | |
| A6-8 | B6-8 | .3750 (9.525) | 1/2 - 14 | .5625-18 UNF-2A | .297 (7.54) | |
| A8-4 | B8-4 | .5000 (12.700) | 1/4 - 18 | .7500-16 UNF-2A | .391 (9.93) | |
| A8 | B8 | .5000 (12.700) | 3/8 - 18 | .7500-16 UNF-2A | .391 (9.93) | |
| A8-8 | B8-8 | .5000 (12.700) | 1/2 - 14 | .7500-16 UNF-2A | .391 (9.93) | |
| A8-12 | B8-12 | .5000 (12.700) | 3/4 -14 | .7500-16 UNF-2A | .391 (9.93) | |
| A10-6 | B10-6 | .6250 (15.875) | 3/8 - 18 | .8750-14 UNF-2A | .484 (12.29) | |
| A10 | B10 | .6250 (15.875) | 1/2 - 14 | .8750-14 UNF-2A | .484 (12.29) | |
| A12-8 | B12-8 | .7500 (19.050) | 1/2 - 14 | 1.0625-12 UN-2A | .609 (15.47) | ±.005 (0.13) |
| A12 | B12 | .7500 (19.050) | 3/4 -14 | 1.0625-12 UN-2A | .609 (15.47) | |
| A14 | B14 | .8750 (22.225) | 3/4 -14 | 1.1875-12 UN-2A | .718 (18.24) | |
| A16-12 | B16-12 | 1.0000 (25.400) | 3/4 -14 | 1.3125-12 UN-2A | .844 (21.44) | +.007 -.005 (+0.18 -0.13) |
| A16 | B16 | 1.0000 (25.400) | 1 - 11½ | 1.3125-12 UN-2A | .844 (21.44) | |
| A20 | B20 | 1.2500 (31.750) | 1 1/4 - 11 1/2 | 1.6250-12 UN-2A | 1.078 (27.38) | +.008 -.005 (+0.20 -0.13) |
| A24 | B24 | 1.5000 (38.100) | 1 1/2 - 11 1/2 | 1.8750-12 UN-2A | 1.312 (33.32) | |
| A32 | B32 | 2.0000 (50.800) | 2 - 11 1/2 | 2.500-12 UN-2A | 1.781 (45.24) | +.010 -.005 (+0.25 -.013) |

See notes at end of figure.

FIGURE 1. Elbow, pipe to tube 45°. - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

| Suffix designator | | $D_1$ Dia. drill inches (mm) | $M_2$ inch (mm) ±.030 (0.76) | $N_2$ inch (mm) .030 (0.76) |
|---|---|---|---|---|
| Assembly (see note 4) | Body | | | |
| A2 | B2 | .188 (4.78) | .660 (16.76) | .520 (13.21) |
| A3 | B3 | .188 (4.78) | .660 (16.76) | .520 (13.21) |
| A4 | B4 | .188 (4.78) | .720 (18.29) | .640 (16.26) |
| A4-4 | B4-4 | .281 (7.14) | .820 (20.83) | .860 (21.84) |
| A5 | B5 | .188 (4.78) | .770 (19.56) | .640 (16.26) |
| A5-4 | B5-4 | .281 (7.14) | .820 (20.83) | .860 (21.84) |
| A6-2 | B6-2 | .188 (4.78) | .830 (21.08) | .670 (17.02) |
| A6 | B6 | .281 (7.14) | .830 (21.08) | .860 (21.84) |
| A6-6 | B6-6 | .406 (10.31) | .870 (22.10) | .950 (24.13) |
| A6-8 | B6-8 | .531 (13.49) | .880 (22.35) | 1.170 (29.72) |
| A8-4 | B8-4 | .281 (7.14) | .980 (24.89) | .950 (24.13) |
| A8 | B8 | .406 (10.31) | .980 (24.89) | .950 (24.13) |
| A8-8 | B8-8 | .531 (13.49) | .990 (25.15) | 1.170 (29.72) |
| A8-12 | B8-12 | .719 (18.26) | 1.040 (26.42) | 1.200 (30.48) |
| A10-6 | B10-6 | .406 (10.31) | 1.110 (28.19) | .980 (24.89) |
| A10 | B10 | .531 (13.49) | 1.110 (28.19) | 1.170 (29.72) |
| A12-8 | B12-8 | .531 (13.49) | 1.280 (32.51) | 1.200 (30.48) |
| A12 | B12 | .719 (18.26) | 1.280 (32.51) | 1.200 (30.48) |
| A14 | B14 | .719 (18.26) | 1.390 (35.31) | 1.270 (32.26) |
| A16-12 | B16-12 | .719 (18.26) | 1.470 (37.34) | 1.290 (32.77) |
| A16 | B16 | .938 (23.83) | 1.470 (37.34) | 1.480 (37.59) |
| A20 | B20 | 1.250 (31.75) | 1.590 (40.39) | 1.670 (42.42) |
| A24 | B24 | 1.500 (38.10) | 1.780 (45.21) | 1.770 (44.96) |
| A32 | B32 | 1.938 (49.23) | 2.220 (56.39) | 2.110 (53.59) |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Break all sharp edges, remove all burrs, and slivers.
4. Assemblies are only furnished to this specification (body, nut, and sleeve). Bodies are not to be stocked, stored, or issued.
5. Dimensions and tolerances not shown shall be in accordance with SAE-J514 for 37°flared fittings.
6. The drawing is for identification purposes only and is not intended to restrict designs and shapes not dimensioned.

FIGURE 1. Elbow, pipe to tube 45°. - Continued.

REQUIREMENTS:

Fittings shall be as specified on figure 1 and in table I.

Components of the assemblies shall be of the same material and finish.

Materials shall be in accordance with MIL-DTL-18866.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

Finish. Finishes shall be as specified in table I. All platings shall be capable of meeting a minimum of 96 hours salt spray test in accordance with ASTM B117. The fittings shall show no evidence of corrosion after 96 hours of salt spray. Fluid passages, other openings and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

TABLE I. Material and finish identification codes.

| PIN code material/plating finish | Material | Plating finish |
|---|---|---|
| Blank | Steel | Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2. 1/ |
| H | Steel | Zinc-Aluminum in accordance with ASTM F1136/F1136M, grade 3, NC. |
| J | Steel | Zinc-nickel in accordance with SAE-AMS2417, type 2, grade B. 2/ |
| M | Nickel-copper alloy UNS N04400 | No additional finish. |
| N | High-chromium nickel alloy UNS N06690 | No additional finish. |
| P | Steel | Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 1. 3/ 4/ |
| R | Steel | Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 8. 4/ |
| S | Corrosion resistant steel | No additional finish. Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7. |
| T | Titanium | Anodize in accordance with SAE-AMS2488 type 2. 5/ |
| TF | Titanium | Fluoride phosphate in accordance with SAE-AMS2486. 5/ |
| Z | Steel | Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 8, or ASTM B695, type II, class 8. 4/ |
| ZC | Steel | Zinc may be any zinc plating from PIN codes H, J, and R with a colored chromate coating. 4/ |

1/ Embrittlement test need not be run. Cadmium shall not be used in oxygen or potable water systems.
2/ The zinc-nickel alloy plate shall contain 12% to 16% nickel. The coating thickness shall be 315µ inches (8µm) minimum.
3/ Hexavalent chromium free. Finish shall be ROHS compliant.
4/ Not for use in aircraft. Requires approval from the Program Office for all applications.
5/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to FED-STD-595 colors 36076 through 36293. Titanium shall not be used in oxygen or potable water systems.

Trivalent wrenchability. When the finish has been damaged due to poor wrenchability, the surface of the connector shall be touched up using one of the brush plating processes below as appropriate to primary finish. The term “trivalent wrenchability” is used to evaluate the ability of the finish to withstand abrasion from an excessive amount of wrenching.


a. Brush plating of hard chromium by electrodeposition shall be in accordance with SAE-AMS-2451/5.
b. Brush plating of medium-hardness, low stress nickel by electrodeposition shall be in accordance with SAE-AMS-2451/9.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

Maximum operating pressure. Maximum operating pressure shall be in accordance with SAE-J514.

PIN: The PIN consists of the letters “MS”, the specification number, a letter and number for elbow size, and a letter for material finish designator.

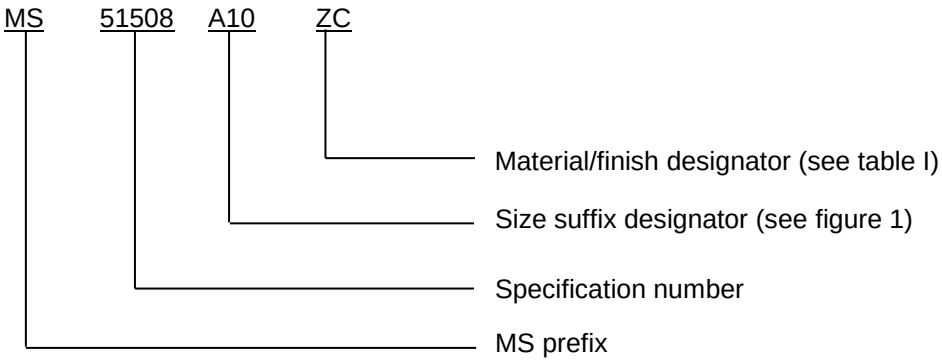


PIN example: MS51508A10FA10ZC indicates an elbow 45°, pipe to tube, .6250 inch (15.875 mm), steel zinc plated colored chromate.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Table II provides a detailed cross-reference of inactive MS51508 PIN’s and for new design SAE-J514 PIN’s.

MS51508 parts have straight threads in accordance with ASME B1.1 the SAE parts have straight threads in accordance with SAE-J425. Dash numbers A4-4 and B4-4 dimension $D_1$ drill diameter is .281 inches (7.14 mm) SAE part is .188 inches (4.78 mm).

Plating “P” SAE allows a range of nickel from 6% to 20%. Below 12%, ZnNi is not much better than zinc plating, which is less expensive and easier to apply. Above 16%, ZnNi becomes more cathodic and no longer acts as a sacrificial coating - if a high nickel coating is damaged the steel beneath the coating will corrode at an accelerated rate.

SAE parts are exposed to a 72-hour salt spray test in lieu of 96 hours.

Users are cautioned to evaluate replacement parts for their particular application.

CAUTION: The superseding information is valid as of the date of this specification and may be superseded by subsequent revisions of the superseding document.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

TABLE II. MS51508 to SAE-J514 cross reference.

| Inactive for new design MS51508- PIN | | Tube OD | Pipe thread NPTF | For new design SAE-J514 PIN | |
|---|---|---|---|---|---|
| Assembly | Body | | | Assembly | Body |
| MS51508A2 | MS51508B2 | 1/8 | 1/8 | Not available | Not available |
| MS51508A2H | MS51508B2H | 1/8 | 1/8 | Not available | Not available |
| MS51508A2J | MS51508B2J | 1/8 | 1/8 | Not available | Not available |
| MS51508A2M | MS51508B2M | 1/8 | 1/8 | J514-2-2-070302MA | J514-2-2-070302MB |
| MS51508A2N | MS51508B2N | 1/8 | 1/8 | J514-2-2-070302NA | J514-2-2-070302NB |
| MS51508A2P | MS51508B2P | 1/8 | 1/8 | J514-2-2-070302PA | J514-2-2-070302PB |
| MS51508A2R | MS51508B2R | 1/8 | 1/8 | Not available | Not available |
| MS51508A2C | MS51508B2C | 1/8 | 1/8 | J514-2-2-070302CA | J514-2-2-070302CB |
| MS51508A2T | MS51508B2T | 1/8 | 1/8 | J514-2-2-070302TA | J514-2-2-070302TB |
| MS51508A2TF | MS51508B2TF | 1/8 | 1/8 | Not available | Not available |
| MS51508A2Z | MS51508B2Z | 1/8 | 1/8 | J514-2-2-070302ZA | J514-2-2-070302ZB |
| MS51508A2ZC | MS51508B2ZC | 1/8 | 1/8 | Not available | Not available |
| | | | | | |
| MS51508A3 | MS51508B3 | 3/16 | 1/8 | Not available | Not available |
| MS51508A3H | MS51508B3H | 3/16 | 1/8 | Not available | Not available |
| MS51508A3J | MS51508B3J | 3/16 | 1/8 | Not available | Not available |
| MS51508A3M | MS51508B3M | 3/16 | 1/8 | J514-3-2-070302MA | J514-3-2-070302MB |
| MS51508A3N | MS51508B3N | 3/16 | 1/8 | J514-3-2-070302NA | J514-3-2-070302NB |
| MS51508A3P | MS51508B3P | 3/16 | 1/8 | J514-3-2-070302PA | J514-3-2-070302PB |
| MS51508A3R | MS51508B3R | 3/16 | 1/8 | Not available | Not available |
| MS51508A3S | MS51508B3S | 3/16 | 1/8 | J514-3-2-070302SA | J514-3-2-070302SB |
| MS51508A3T | MS51508B3T | 3/16 | 1/8 | J514-3-2-070302TA | J514-3-2-070302TB |
| MS51508A3TF | MS51508B3TF | 3/16 | 1/8 | Not available | Not available |
| MS51508A3Z | MS51508B3Z | 3/16 | 1/8 | J514-3-2-070302ZA | J514-3-2-070302ZB |
| MS51508A3ZC | MS51508B3ZC | 3/16 | 1/8 | Not available | Not available |
| | | | | | |
| MS51508A4 | MS51508B4 | 1/4 | 1/8 | Not available | Not available |
| MS51508A4H | MS51508B4H | 1/4 | 1/8 | Not available | Not available |
| MS51508A4J | MS51508B4J | 1/4 | 1/8 | Not available | Not available |
| MS51508A4M | MS51508B4M | 1/4 | 1/8 | J514-4-2-070302MA | J514-4-2-070302MB |
| MS51508A4N | MS51508B4N | 1/4 | 1/8 | J514-4-2-070302NA | J514-4-2-070302NB |
| MS51508A4P | MS51508B4P | 1/4 | 1/8 | J514-4-2-070302PA | J514-4-2-070302PB |
| MS51508A4R | MS51508B4R | 1/4 | 1/8 | Not available | Not available |
| MS51508A4S | MS51508B4S | 1/4 | 1/8 | J514-4-2-070302SA | J514-4-2-070302SB |
| MS51508A4T | MS51508B4T | 1/4 | 1/8 | J514-4-2-070302TA | J514-4-2-070302TB |
| MS51508A4TF | MS51508B4TF | 1/4 | 1/8 | Not available | Not available |
| MS51508A4Z | MS51508B4Z | 1/4 | 1/8 | J514-4-2-070302ZA | J514-4-2-070302ZB |
| MS51508A4ZC | MS51508B4ZC | 1/4 | 1/8 | Not available | Not available |
| | | | | | |
| MS51508A5 | MS51508B5 | 5/16 | 1/8 | Not available | Not available |
| MS51508A5H | MS51508B5H | 5/16 | 1/8 | Not available | Not available |
| MS51508A5J | MS51508B5J | 5/16 | 1/8 | Not available | Not available |
| MS51508A5M | MS51508B5M | 5/16 | 1/8 | J514-5-2-070302MA | J514-5-2-070302MB |
| MS51508A5N | MS51508B5N | 5/16 | 1/8 | J514-5-2-070302NA | J514-5-2-070302NB |
| MS51508A5P | MS51508B5P | 5/16 | 1/8 | J514-5-2-070302PA | J514-5-2-070302PB |
| MS51508A5R | MS51508B5R | 5/16 | 1/8 | Not available | Not available |
| MS51508A5S | MS51508B5S | 5/16 | 1/8 | J514-5-2-070302SA | J514-5-2-070302SB |
| MS51508A5T | MS51508B5T | 5/16 | 1/8 | J514-5-2-070302TA | J514-5-2-070302TB |
| MS51508A5TF | MS51508B5TF | 5/16 | 1/8 | Not available | Not available |
| MS51508A5Z | MS51508B5Z | 5/16 | 1/8 | J514-5-2-070302ZA | J514-5-2-070302ZB |
| MS51508A5ZC | MS51508B5ZC | 5/16 | 1/8 | Not available | Not available |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

TABLE II. MS51508 to SAE-J514 cross reference - Continued.

| Inactive for new design MS51508- PIN | | Tube OD | Pipe thread NPTF | For new design SAE-J514 PIN | |
|---|---|---|---|---|---|
| Assembly | Body | | | Assembly | Body |
| MS51508A6 | MS51508B6 | 3/8 | 1/4 | Not available | Not available |
| MS51508A6H | MS51508B6H | 3/8 | 1/4 | Not available | Not available |
| MS51508A6J | MS51508B6J | 3/8 | 1/4 | Not available | Not available |
| MS51508A6M | MS51508B6M | 3/8 | 1/4 | J514-6-4-070302MA | J514-6-4-070302MB |
| MS51508A6N | MS51508B6N | 3/8 | 1/4 | J514-6-4-070302NA | J514-6-4-070302NB |
| MS51508A6P | MS51508B6P | 3/8 | 1/4 | J514-6-4-070302PA | J514-6-4-070302PB |
| MS51508A6R | MS51508B6R | 3/8 | 1/4 | Not available | Not available |
| MS51508A6S | MS51508B6S | 3/8 | 1/4 | J514-6-4-070302SA | J514-6-4-070302SB |
| MS51508A6T | MS51508B6T | 3/8 | 1/4 | J514-6-4-070302TA | J514-6-4-070302TB |
| MS51508A6TF | MS51508B6TF | 3/8 | 1/4 | Not available | Not available |
| MS51508A6Z | MS51508B6Z | 3/8 | 1/4 | J514-6-4-070302ZA | J514-6-4-070302ZB |
| MS51508A6ZC | MS51508B6ZC | 3/8 | 1/4 | Not available | Not available |
| | | | | | |
| MS51508A8 | MS51508B8 | 1/2 | 3/8 | Not available | Not available |
| MS51508A8H | MS51508B8H | 1/2 | 3/8 | Not available | Not available |
| MS51508A8J | MS51508B8J | 1/2 | 3/8 | Not available | Not available |
| MS51508A8M | MS51508B8M | 1/2 | 3/8 | J514-8-6-070302MA | J514-8-6-070302MB |
| MS51508A8N | MS51508B8N | 1/2 | 3/8 | J514-8-6-070302NA | J514-8-6-070302NB |
| MS51508A8P | MS51508B8P | 1/2 | 3/8 | J514-8-6-070302PA | J514-8-6-070302PB |
| MS51508A8R | MS51508B8R | 1/2 | 3/8 | Not available | Not available |
| MS51508A8CN | MS51508B8CN | 1/2 | 3/8 | Not available | Not available |
| MS51508A8T | MS51508B8T | 1/2 | 3/8 | J514-8-6-070302TA | J514-8-6-070302TB |
| MS51508A8TF | MS51508B8TF | 1/2 | 3/8 | Not available | Not available |
| MS51508A8Z | MS51508B8Z | 1/2 | 3/8 | J514-8-6-070302ZA | J514-8-6-070302ZB |
| MS51508A8ZC | MS51508B8ZC | 1/2 | 3/8 | Not available | Not available |
| | | | | | |
| MS51508A10 | MS51508B10 | 5/8 | 1/2 | Not available | Not available |
| MS51508A10H | MS51508B10H | 5/8 | 1/2 | Not available | Not available |
| MS51508A10J | MS51508B10J | 5/8 | 1/2 | Not available | Not available |
| MS51508A10M | MS51508B10M | 5/8 | 1/2 | J514-10-8-070302MA | J514-10-8-070302MB |
| MS51508A10N | MS51508B10N | 5/8 | 1/2 | J514-10-8-070302NA | J514-10-8-070302NB |
| MS51508A10P | MS51508B10P | 5/8 | 1/2 | J514-10-8-070302PA | J514-10-8-070302PB |
| MS51508A10R | MS51508B10R | 5/8 | 1/2 | Not available | Not available |
| MS51508A10S | MS51508B10S | 5/8 | 1/2 | J514-10-8-070302SA | J514-10-8-070302SB |
| MS51508A10T | MS51508B10T | 5/8 | 1/2 | J514-10-8-070302TA | J514-10-8-070302TB |
| MS51508A10TF | MS51508B10TF | 5/8 | 1/2 | Not available | Not available |
| MS51508A10Z | MS51508B10Z | 5/8 | 1/2 | J514-10-8-070302ZA | J514-10-8-070302ZB |
| MS51508A10ZC | MS51508B10ZC | 5/8 | 1/2 | Not available | Not available |
| | | | | | |
| MS51508A12 | MS51508B12 | 3/4 | 3/4 | Not available | Not available |
| MS51508A12H | MS51508B12H | 3/4 | 3/4 | Not available | Not available |
| MS51508A12J | MS51508B12J | 3/4 | 3/4 | Not available | Not available |
| MS51508A12M | MS51508B12M | 3/4 | 3/4 | J514-12-12-070302MA | J514-12-12-070302MB |
| MS51508A12N | MS51508B12N | 3/4 | 3/4 | J514-12-12-070302NA | J514-12-12-070302NB |
| MS51508A12P | MS51508B12P | 3/4 | 3/4 | J514-12-12-070302PA | J514-12-12-070302PB |
| MS51508A12R | MS51508B12R | 3/4 | 3/4 | Not available | Not available |
| MS51508A12S | MS51508B12S | 3/4 | 3/4 | J514-12-12-070302SA | J514-12-12-070302SB |
| MS51508A12T | MS51508B12T | 3/4 | 3/4 | J514-12-12-070302TA | J514-12-12-070302TB |
| MS51508A12TF | MS51508B12TF | 3/4 | 3/4 | Not available | Not available |
| MS51508A12Z | MS51508B12Z | 3/4 | 3/4 | J514-12-12-070302ZA | J514-12-12-070302ZB |
| MS51508A12ZC | MS51508B12ZC | 3/4 | 3/4 | Not available | Not available |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

TABLE II. MS51508 to SAE-J514 cross reference - Continued.

| Inactive for new design MS51508- PIN | | Tube OD | Pipe thread NPTF | For new design SAE-J514 PIN | |
|---|---|---|---|---|---|
| Assembly | Body | | | Assembly | Body |
| MS51508A14 | MS51508B14 | 7/8 | 3/4 | Not available | Not available |
| MS51508A14H | MS51508B14H | 7/8 | 3/4 | Not available | Not available |
| MS51508A14J | MS51508B14J | 7/8 | 3/4 | Not available | Not available |
| MS51508A14M | MS51508B14M | 7/8 | 3/4 | J514-14-12-070302MA | J514-14-12-070302MB |
| MS51508A14N | MS51508B14N | 7/8 | 3/4 | J514-14-12-070302NA | J514-14-12070302NB |
| MS51508A14P | MS51508B14P | 7/8 | 3/4 | J514-14-12-070302PA | J514-14-12-070302PB |
| MS51508A14R | MS51508B14R | 7/8 | 3/4 | Not available | Not available |
| MS51508A14S | MS51508B14S | 7/8 | 3/4 | J514-14-12-070302SA | J514-14-12-070302SB |
| MS51508A14T | MS51508B14T | 7/8 | 3/4 | J514-14-12-070302TA | J514-14-12-070302TB |
| MS51508A14TF | MS51508B14TF | 7/8 | 3/4 | Not available | Not available |
| MS51508A14Z | MS51508B14Z | 7/8 | 3/4 | J514-14-12-070302ZA | J514-14-12-070302ZB |
| MS51508A14ZC | MS51508B14ZC | 7/8 | 3/4 | Not available | Not available |
| | | | | | |
| MS51508A16 | MS51508B16 | 1 | 1 | Not available | Not available |
| MS51508A16H | MS51508B16H | 1 | 1 | Not available | Not available |
| MS51508A16J | MS51508B16J | 1 | 1 | Not available | Not available |
| MS51508A16M | MS51508B16M | 1 | 1 | J514-16-16-070302MA | J514-16-16-070302MB |
| MS51508A16N | MS51508B16N | 1 | 1 | J514-16-16-070302NA | J514-16-16-070302NB |
| MS51508A16P | MS51508B16P | 1 | 1 | J514-16-16-070302PA | J514-16-16-070302PB |
| MS51508A16R | MS51508B16R | 1 | 1 | Not available | Not available |
| MS51508A16S | MS51508B16S | 1 | 1 | J514-16-16-070302SA | J514-16-16-070302SB |
| MS51508A16T | MS51508B16T | 1 | 1 | J514-16-16-070302TA | J514-16-16-070302TB |
| MS51508A16TF | MS51508B16TF | 1 | 1 | Not available | Not available |
| MS51508A16Z | MS51508B16Z | 1 | 1 | J514-16-16-070302ZA | J514-16-16-070302ZB |
| MS51508A16ZC | MS51508B16ZC | 1 | 1 | Not available | Not available |
| | | | | | |
| MS51508A20 | MS51508B20 | 1 1/4 | 1 1/4 | Not available | Not available |
| MS51508A20H | MS51508B20H | 1 1/4 | 1 1/4 | Not available | Not available |
| MS51508A20J | MS51508B20J | 1 1/4 | 1 1/4 | Not available | Not available |
| MS51508A20M | MS51508B20M | 1 1/4 | 1 1/4 | J514-20-20-070302MA | J514-20-20-070302MB |
| MS51508A20N | MS51508B20N | 1 1/4 | 1 1/4 | J514-20-20-070302NA | J514-20-20-070302NB |
| MS51508A20P | MS51508B20P | 1 1/4 | 1 1/4 | J514-20-20-070302PA | J514-20-20-070302PB |
| MS51508A20R | MS51508B20R | 1 1/4 | 1 1/4 | Not available | Not available |
| MS51508A20S | MS51508B20S | 1 1/4 | 1 1/4 | J514-20-20-070302SA | J514-20-20-070302SB |
| MS51508A20T | MS51508B20T | 1 1/4 | 1 1/4 | J514-20-20-070302TA | J514-20-20-070302TB |
| MS51508A20TF | MS51508B20TF | 1 1/4 | 1 1/4 | Not available | Not available |
| MS51508A20Z | MS51508B20Z | 1 1/4 | 1 1/4 | J514-20-20-070302ZA | J514-20-20-070302ZB |
| MS51508A20ZC | MS51508B20ZC | 1 1/4 | 1 1/4 | Not available | Not available |
| | | | | | |
| MS51508A24 | MS51508B24 | 1 1/2 | 1 1/2 | Not available | Not available |
| MS51508A24H | MS51508B24H | 1 1/2 | 1 1/2 | Not available | Not available |
| MS51508A24J | MS51508B24K | 1 1/2 | 1 1/2 | Not available | Not available |
| MS51508A24M | MS51508B24M | 1 1/2 | 1 1/2 | J514-24-24-070302MA | J514-24-24-070302MB |
| MS51508A24N | MS51508B24N | 1 1/2 | 1 1/2 | J514-24-24-070302NA | J514-24-24-070302NB |
| MS51508A24P | MS51508B24P | 1 1/2 | 1 1/2 | J514-24-24-070302PA | J514-24-24-070302PB |
| MS51508A24R | MS51508B24R | 1 1/2 | 1 1/2 | Not available | Not available |
| MS51508A24S | MS51508B24S | 1 1/2 | 1 1/2 | J514-24-24-070302SA | J514-24-24-070302SB |
| MS51508A24T | MS51508B24T | 1 1/2 | 1 1/2 | J514-24-24-070302TA | J514-24-24-070302TB |
| MS51508A24TF | MS51508B24TF | 1 1/2 | 1 1/2 | Not available | Not available |
| MS51508A24Z | MS51508B24Z | 1 1/2 | 1 1/2 | J514-24-24-070302ZA | J514-24-24-070302ZB |
| MS51508A24ZC | MS51508B24ZC | 1 1/2 | 1 1/2 | Not available | Not available |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

TABLE II. MS51508 to SAE-J514 cross reference - Continued.

| Inactive for new design MS51508- PIN | | Tube OD | Pipe thread NPTF | For new design SAE-J514 PIN | |
|---|---|---|---|---|---|
| Assembly | Body | | | Assembly | Body |
| MS51508A32 | MS51508B32 | 2 | 2 | Not available | Not available |
| MS51508A32H | MS51508B32H | 2 | 2 | Not available | Not available |
| MS51508A32J | MS51508B32J | 2 | 2 | Not available | Not available |
| MS51508A32M | MS51508B32M | 2 | 2 | J514-32-32-070302MA | J514-32-32-070302MB |
| MS51508A32N | MS51508B32N | 2 | 2 | J514-32-32-070302NA | J514-32-32-070302NB |
| MS51508A32P | MS51508B32P | 2 | 2 | J514-32-32-070302PA | J514-32-32-070302PB |
| MS51508A32R | MS51508B32R | 2 | 2 | Not available | Not available |
| MS51508A32S | MS51508B32S | 2 | 2 | J514-32-32-070302SA | J514-32-32-070302SB |
| MS51508A32T | MS51508B32T | 2 | 2 | J514-32-32-070302TA | J514-32-32-070302TB |
| MS51508A32TF | MS51508B32TF | 2 | 2 | Not available | Not available |
| MS51508A32Z | MS51508B32Z | 2 | 2 | J514-32-32-070302ZA | J514-32-32-070302ZB |
| MS51508A32ZC | MS51508B32ZC | 2 | 2 | Not available | Not available |
| | | | | | |
| MS51508A4-4 | MS51508B4-4 | 1/4 | 1/4 | Not available | Not available |
| MS51508A4-4H | MS51508B4-4H | 1/4 | 1/4 | Not available | Not available |
| MS51508A4-4J | MS51508B4-4J | 1/4 | 1/4 | Not available | Not available |
| MS51508A4-4M | MS51508B4-4M | 1/4 | 1/4 | J514-4-4-070302MA | J514-4-4-070302MB |
| MS51508A4-4N | MS51508B4-4N | 1/4 | 1/4 | J514-4-4-070302NA | J514-4-4-070302NB |
| MS51508A4-4P | MS51508B4-4P | 1/4 | 1/4 | J5144-4-070302PA | J514-4-4-070302PB |
| MS51508A4-4R | MS51508B4-4R | 1/4 | 1/4 | Not available | Not available |
| MS51508A4-4S | MS51508B4-4S | 1/4 | 1/4 | J514-4-4-070302SA | J514-4-4-070302SB |
| MS51508A4-4T | MS51508B4-4T | 1/4 | 1/4 | J514-4-4-070302TA | J514-4-4-070302TB |
| MS51508A4-4TF | MS51508B4-4TF | 1/4 | 1/4 | Not available | Not available |
| MS51508A4-4Z | MS51508B4-4Z | 1/4 | 1/4 | J514-4-4-070302ZA | J514-4-4-070302ZB |
| MS51508A4-4ZC | MS51508B4-4ZC | 1/4 | 1/4 | Not available | Not available |
| | | | | | |
| MS51508A5-4 | MS51508B5-4 | 5/16 | 1/4 | Not available | Not available |
| MS51508A5-4H | MS51508B5-4H | 5/16 | 1/4 | Not available | Not available |
| MS51508A5-4J | MS51508B5-4J | 5/16 | 1/4 | Not available | Not available |
| MS51508A5-4M | MS51508B5-4M | 5/16 | 1/4 | J514-5-4-070302MA | J514-5-4-070302MB |
| MS51508A5-4N | MS51508B5-4N | 5/16 | 1/4 | J514-5-4-070302NA | J514-5-4-070302NB |
| MS51508A5-4P | MS51508B5-4P | 5/16 | 1/4 | J514-5-4-070302PA | J514-5-4-070302PB |
| MS51508A5-4R | MS51508B5-4R | 5/16 | 1/4 | Not available | Not available |
| MS51508A5-4S | MS51508B5-4S | 5/16 | 1/4 | J514-5-4-070302SA | J514-5-4-070302SB |
| MS51508A5-4T | MS51508B5-4T | 5/16 | 1/4 | J514-5-4-070302TA | J514-5-4-070302TB |
| MS51508A5-4TF | MS51508B5-4TF | 5/16 | 1/4 | Not available | Not available |
| MS51508A5-4Z | MS51508B5-4Z | 5/16 | 1/4 | J514-5-4-070302ZA | J514-5-4-070302ZB |
| MS51508A5-4ZC | MS51508B5-4ZC | 5/16 | 1/4 | Not available | Not available |
| | | | | | |
| MS51508A6-2 | MS51508B6-2 | 3/8 | 1/8 | Not available | Not available |
| MS51508A6-2H | MS51508B6-2H | 3/8 | 1/8 | Not available | Not available |
| MS51508A6-2J | MS51508B6-2J | 3/8 | 1/8 | Not available | Not available |
| MS51508A6-2M | MS51508B6-2M | 3/8 | 1/8 | J514-6-2-070302MA | J514-6-2-070302MB |
| MS51508A6-2N | MS51508B6-2N | 3/8 | 1/8 | J514-6-2-070302NA | J514-6-2-070302NB |
| MS51508A6-2P | MS51508B6-2P | 3/8 | 1/8 | J514-6-2-070302PA | J514-6-2-070302PB |
| MS51508A6-2R | MS51508B6-2R | 3/8 | 1/8 | Not available | Not available |
| MS51508A6-2S | MS51508B6-2S | 3/8 | 1/8 | J514-6-2-070302SA | J514-6-2-070302SB |
| MS51508A6-2T | MS51508B6-2T | 3/8 | 1/8 | J514-6-2-070302TA | J514-6-2-070302TB |
| MS51508A6-2TF | MS51508B6-2TF | 3/8 | 1/8 | Not available | Not available |
| MS51508A6-2Z | MS51508B6-2Z | 3/8 | 1/8 | J514-6-2-070302ZA | J514-6-2-070302ZB |
| MS51508A6-2ZC | MS51508B6-2ZC | 3/8 | 1/8 | Not available | Not available |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

TABLE II. MS51508 to SAE-J514 cross reference - Continued.

| Inactive for new design MS51508- PIN | | Tube OD | Pipe thread NPTF | For new design SAE-J514 PIN | |
|---|---|---|---|---|---|
| Assembly | Body | | | Assembly | Body |
| MS51508A6-6 | MS51508B6-6 | 3/8 | 3/8 | Not available | Not available |
| MS51508A6-6H | MS51508B6-6H | 3/8 | 3/8 | Not available | Not available |
| MS51508A6-6J | MS51508B6-6J | 3/8 | 3/8 | Not available | Not available |
| MS51508A6-6M | MS51508B6-6M | 3/8 | 3/8 | J514-6-6-070302MA | J514-6-6-070302MB |
| MS51508A6-6N | MS51508B6-6N | 3/8 | 3/8 | J514-6-6-070302NA | J514-6-6-070302NB |
| MS51508A6-6P | MS51508B6-6P | 3/8 | 3/8 | J514-6-6-070302PA | J514-6-6-070302PB |
| MS51508A6-6R | MS51508B6-6R | 3/8 | 3/8 | Not available | Not available |
| MS51508A6-6S | MS51508B6-6S | 3/8 | 3/8 | J514-6-6-070302SA | J514-6-6-070302SB |
| MS51508A6-6T | MS51508B6-6T | 3/8 | 3/8 | J514-6-6-070302TA | J514-6-6-070302TB |
| MS51508A6-6TF | MS51508B6-6TF | 3/8 | 3/8 | Not available | Not available |
| MS51508A6-6Z | MS51508B6-6Z | 3/8 | 3/8 | J514-6-6-070302ZA | J514-6-6-070302ZB |
| MS51508A6-6ZC | MS51508B6-6ZC | 3/8 | 3/8 | Not available | Not available |
| | | | | | |
| MS51508A6-8 | MS51508B6-8 | 3/8 | 1/2 | Not available | Not available |
| MS51508A6-8H | MS51508B6-8H | 3/8 | 1/2 | Not available | Not available |
| MS51508A6-8J | MS51508B6-8J | 3/8 | 1/2 | Not available | Not available |
| MS51508A6-8M | MS51508B6-8M | 3/8 | 1/2 | J514-6-8-070302MA | J514-6-8-070302MB |
| MS51508A6-8N | MS51508B6-8N | 3/8 | 1/2 | J514-6-8-070302NA | J514-6-8-070302NB |
| MS51508A6-8P | MS51508B6-8P | 3/8 | 1/2 | J514-6-8-070302PA | J514-6-8-070302PB |
| MS51508A6-8R | MS51508B6-8R | 3/8 | 1/2 | Not available | Not available |
| MS51508A6-8S | MS51508B6-8S | 3/8 | 1/2 | J514-6-8-070302SA | J514-6-8-070302SB |
| MS51508A6-8T | MS51508B6-8T | 3/8 | 1/2 | J514-6-8-070302TA | J514-6-8-070302TB |
| MS51508A6-8TF | MS51508B6-8TF | 3/8 | 1/2 | Not available | Not available |
| MS51508A6-8Z | MS51508B6-8Z | 3/8 | 1/2 | J514-6-8-070302ZA | J514-6-8-070302ZB |
| MS51508A6-8ZC | MS51508B6-8ZC | 3/8 | 1/2 | Not available | Not available |
| | | | | | |
| MS51508A8-4 | MS51508B8-4 | 1/2 | 1/4 | Not available | Not available |
| MS51508A8-4H | MS51508B8-4H | 1/2 | 1/4 | Not available | Not available |
| MS51508A8-4J | MS51508B8-4J | 1/2 | 1/4 | Not available | Not available |
| MS51508A8-4M | MS51508B8-4M | 1/2 | 1/4 | J514-8-4-070302MA | J514-8-4-070302MB |
| MS51508A8-4N | MS51508B8-4N | 1/2 | 1/4 | J514-8-4-070302NA | J514-8-4-070302NB |
| MS51508A8-4P | MS51508B8-4P | 1/2 | 1/4 | J514-8-4-070302PA | J514-8-4-070302PB |
| MS51508A8-4R | MS51508B8-4R | 1/2 | 1/4 | Not available | Not available |
| MS51508A8-4S | MS51508B8-4S | 1/2 | 1/4 | J514-8-4-070302SA | J514-8-4-070302SB |
| MS51508A8-4T | MS51508B8-4T | 1/2 | 1/4 | J514-8-4-070302TA | J514-8-4-070302TB |
| MS51508A8-4TF | MS51508B8-4TF | 1/2 | 1/4 | Not available | Not available |
| MS51508A8-4Z | MS51508B8-4Z | 1/2 | 1/4 | J514-8-4-070302ZA | J514-8-4-070302ZB |
| MS51508A8-4ZC | MS51508B8-4ZC | 1/2 | 1/4 | Not available | Not available |
| | | | | | |
| MS51508A8-8 | MS51508B8-8 | 1/2 | 1/2 | Not available | Not available |
| MS51508A8-8H | MS51508B8-8H | 1/2 | 1/2 | Not available | Not available |
| MS51508A8-8J | MS51508B8-8J | 1/2 | 1/2 | Not available | Not available |
| MS51508A8-8M | MS51508B8-8M | 1/2 | 1/2 | J514-8-8-070302MA | J514-8-8-070302MB |
| MS51508A8-8N | MS51508B8-8N | 1/2 | 1/2 | J514-8-8-070302NA | J514-8-8-070302NB |
| MS51508A8-8P | MS51508B8-8P | 1/2 | 1/2 | J514-8-8-070302PA | J514-8-8-070302PB |
| MS51508A8-8R | MS51508B8-8R | 1/2 | 1/2 | Not available | Not available |
| MS51508A8-8S | MS51508B8-8S | 1/2 | 1/2 | J514-8-8-070302SA | J514-8-8-070302SB |
| MS51508A8-8T | MS51508B8-8T | 1/2 | 1/2 | J514-8-8-070302TA | J514-8-8-070302TB |
| MS51508A8-8TF | MS51508B8-8TF | 1/2 | 1/2 | Not available | Not available |
| MS51508A8-8Z | MS51508B8-8Z | 1/2 | 1/2 | J514-8-8-070302ZA | J514-8-8-070302ZB |
| MS51508A8-8ZC | MS51508B8-8ZC | 1/2 | 1/2 | Not available | Not available |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

TABLE II. MS51508 to SAE-J514 cross reference - Continued.

| Inactive for new design MS51508- PIN | | Tube OD | Pipe thread NPTF | For new design SAE-J514 PIN | |
|---|---|---|---|---|---|
| Assembly | Body | | | Assembly | Body |
| MS51508A8-12 | MS51508B8-12 | 1/2 | 3/4 | Not available | Not available |
| MS51508A8-12H | MS51508B8-12H | 1/2 | 3/4 | Not available | Not available |
| MS51508A8-12J | MS51508B8-12J | 1/2 | 3/4 | Not available | Not available |
| MS51508A8-12M | MS51508B8-12M | 1/2 | 3/4 | J514-8-12-070302MA | J514-8-12-070302MB |
| MS51508A8-12N | MS51508B8-12N | 1/2 | 3/4 | J514-8-12-070302NA | J514-8-12-070302NB |
| MS51508A8-12P | MS51508B8-12P | 1/2 | 3/4 | J514-8-12-070302PA | J514-8-12-070302PB |
| MS51508A8-12R | MS51508B8-12R | 1/2 | 3/4 | Not available | Not available |
| MS51508A8-12S | MS51508B8-12S | 1/2 | 3/4 | J514-8-12-070302SA | J514-8-12-070302SB |
| MS51508A8-12T | MS51508B8-12T | 1/2 | 3/4 | J514-8-12-070302TA | J514-8-12-070302TB |
| MS51508A8-12TF | MS51508B8-12TF | 1/2 | 3/4 | Not available | Not available |
| MS51508A8-12Z | MS51508B8-12Z | 1/2 | 3/4 | J514-8-12-070302ZA | J514-8-12-070302ZB |
| MS51508A8-12ZC | MS51508B8-12ZC | 1/2 | 3/4 | Not available | Not available |
| | | | | | |
| MS51508A10-6 | MS51508B10-6 | 5/8 | 3/8 | Not available | Not available |
| MS51508A10-6H | MS51508B10-6H | 5/8 | 3/8 | Not available | Not available |
| MS51508A10-6J | MS51508B10-6J | 5/8 | 3/8 | Not available | Not available |
| MS51508A10-6M | MS51508B10-6M | 5/8 | 3/8 | J514-10-6-070302MA | J514-10-6-070302MB |
| MS51508A10-6N | MS51508B10-6N | 5/8 | 3/8 | J514-10-6-070302NA | J514-10-6-070302NB |
| MS51508A10-6P | MS51508B10-6P | 5/8 | 3/8 | J514-10-6-070302PA | J514-10-6-070302PB |
| MS51508A10-6R | MS51508B10-6R | 5/8 | 3/8 | Not available | Not available |
| MS51508A10-6S | MS51508B10-6S | 5/8 | 3/8 | J514-10-6-070302SA | J514-10-6-070302SB |
| MS51508A10-6T | MS51508B10-6T | 5/8 | 3/8 | J514-10-6-070302TA | J514-10-6-070302TB |
| MS51508A10-6TF | MS51508B10-6TF | 5/8 | 3/8 | Not available | Not available |
| MS51508A10-6Z | MS51508B10-6Z | 5/8 | 3/8 | J514-10-6-070302ZA | J514-10-6-070302ZB |
| MS51508A10-6ZC | MS51508B10-6ZC | 5/8 | 3/8 | Not available | Not available |
| | | | | | |
| MS51508A12-8 | MS51508B12-8 | 3/4 | 1/2 | Not available | Not available |
| MS51508A12-8H | MS51508B12-8H | 3/4 | 1/2 | Not available | Not available |
| MS51508A12-8J | MS51508B12-8J | 3/4 | 1/2 | Not available | Not available |
| MS51508A12-8M | MS51508B12-8M | 3/4 | 1/2 | J514-12-8-070302MA | J514-12-8-070302MB |
| MS51508A12-8N | MS51508B12-8N | 3/4 | 1/2 | J514-12-8-070302NA | J514-12-8-070302NB |
| MS51508A12-8P | MS51508B12-8P | 3/4 | 1/2 | J514-12-8-070302PA | J514-12-8-070302PB |
| MS51508A12-8R | MS51508B12-8R | 3/4 | 1/2 | Not available | Not available |
| MS51508A12-8S | MS51508B12-8S | 3/4 | 1/2 | J514-12-8-070302SA | J514-12-8-070302SB |
| MS51508A12-8T | MS51508B12-8T | 3/4 | 1/2 | J514-12-8-070302TA | J514-12-8-070302TB |
| MS51508A12-8TF | MS51508B12-8TF | 3/4 | 1/2 | Not available | Not available |
| MS51508A12-8Z | MS51508B12-8Z | 3/4 | 1/2 | J514-12-8-070302ZA | J514-12-8-070302ZB |
| MS51508A12-8ZC | MS51508B12-8ZC | 3/4 | 1/2 | Not available | Not available |
| | | | | | |
| MS51508A16-12 | MS51508B16-12 | 1 | 3/4 | Not available | Not available |
| MS51508A16-12H | MS51508B16-12H | 1 | 3/4 | Not available | Not available |
| MS51508A16-12J | MS51508B16-12J | 1 | 3/4 | Not available | Not available |
| MS51508A16-12M | MS51508B16-12M | 1 | 3/4 | J514-16-12-070302MA | J514-16-12-070302MB |
| MS51508A16-12N | MS51508B16-12N | 1 | 3/4 | J514-16-12-070302NA | J514-16-12-070302NB |
| MS51508A16-12P | MS51508B16-12P | 1 | 3/4 | J514-16-12-070302PA | J514-16-12-070302PB |
| MS51508A16-12R | MS51508B16-12R | 1 | 3/4 | Not available | Not available |
| MS51508A16-12S | MS51508B16-12S | 1 | 3/4 | J514-16-12-070302SA | J514-16-12-070302SB |
| MS51508A16-12T | MS51508B16-12T | 1 | 3/4 | J514-16-12-070302TA | J514-16-12-070302TB |
| MS51508A16-12TF | MS51508B16-12TF | 1 | 3/4 | Not available | Not available |
| MS51508A16-12Z | MS51508B16-12Z | 1 | 3/4 | J514-16-12-070302ZA | J514-16-12-070302ZB |
| MS51508A16-12ZC | MS51508B16-12ZC | 1 | 3/4 | Not available | Not available |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

| | | | |
|---|---|---|---|
| FED-STD-595/36076 | FED-STD-595/36176 | MS51533 | SAE-AMS2417 |
| FED-STD-595/36081 | FED-STD-595/36231 | ASME B1.1 | SAE-AMS2451/5 |
| FED-STD-595/36099 | FED-STD-595/36251 | ASTM B117 | SAE-AMS2451/9 |
| FED-STD-595/36118 | FED-STD-595/36270 | ASTM B633 | SAE-AMS2486 |
| FED-STD-595/36134 | FED-STD-595/36280 | ASTM B695 | SAE-AMS2488 |
| FED-STD-595/36152 | FED-STD-595/36293 | ASTM F1136/F1136M | SAE-AMS2700 |
| FED-STD-595/36170 | MIL-DTL-16232 | SAE-AMS-C-81562 | SAE-J425 |
| FED-STD-595/36173 | MS51531 | SAE-AMS-QQ-P-416 | SAE-J514 |

## CONCLUDING MATERIAL

Custodians:
Army - AR
Navy - OS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2016-056)

Review activities:
Army - AT, MI
Navy - MC
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:04Z
Check the source to verify that this is the current version before use.