
FED. SUP CLASS
5315

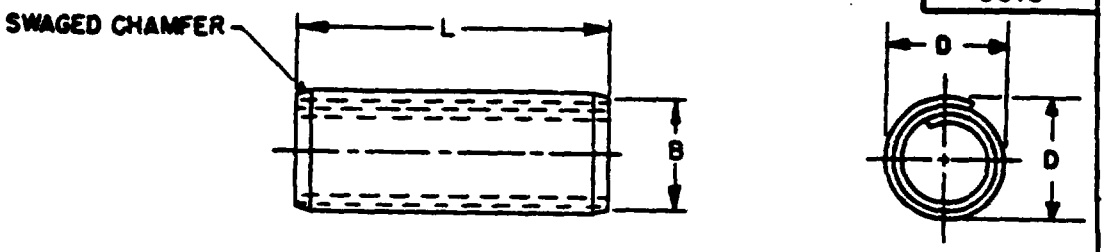

REVIEWER: AV, IS, NI, MS, NSA, SS
USER: AT, EL, GL, MC, ME, SH

TABLE I

NOMINAL DIAMETER	D DIA ACTUAL (FREE) STATE MAX	D DIA ACTUAL (FREE) STATE MIN	B CHAMFER DIAMETER MAX	MINIMUM DOUBLE SHEAR STRENGTH POUNDS CRES 410 THRU 420 CARBON STEEL 1070 THRU 1095	MINIMUM DOUBLE SHEAR STRENGTH POUNDS ALLOY STEEL 6150	MINIMUM DOUBLE SHEAR STRENGTH POUNDS CRES 302	RECOMMENDED HOLE SIZE MAX	RECOMMENDED HOLE SIZE MIN
1/32	.035	.033	.029	75 *		60	.032	.031
.039	.044	.041	.037	120 *		100	.040	.039
3/64	.052	.049	.045	170 *		140	.048	.046
.052	.057	.054	.050	230 *		190	.053	.051
1/16	.072	.067	.059	300		250	.065	.061
5/64	.088	.083	.075	475		400	.081	.077
3/32	.105	.099	.091	700		550	.097	.093
7/64	.120	.114	.106	950		750	.112	.108
1/8	.138	.131	.121	1250		1000	.129	.124
5/32	.171	.163	.152	1925		1550	.160	.155
3/16	.205	.196	.182	2800		2250	.192	.185
7/32	.238	.228	.214	3800		3000	.224	.217
1/4	.271	.260	.243	5000		4000	.256	.247
5/16	.337	.324	.304	7700		6200	.319	.308
3/8	.403	.388	.366	11200		9000	.383	.370
7/16	.469	.452	.427	15200		13000	.446	.431
1/2	.535	.516	.488	20000		16000	.510	.493
5/8	.661	.642	.613		31000		.635	.618
3/4	.787	.768	.738		45000		.760	.743

* CRES 410 thru 420 only.

NOTES:

1. MATERIAL: Steel, Carbon, per Federal Standard No. 66, steel numbers 1070 thru 1095.
   Steel, Alloy, per Federal Standard No. 66, steel number 6150.
   Steel, Corrosion Resisting, per Federal Standard No. 66, steel numbers 302 or 410 thru 420.
2. PROTECTIVE COATING: Steel, Carbon, cadmium plated per QQ-P-416, Type II, Class 3.
   Steel, Carbon and Alloy, phosphate coated in accordance with MIL-P-16232, Type Z, Class 2.
   Steel Corrosion Resisting, passivated per QQ-P-35.
3. HARDNESS: Steel, Carbon, Rockwell C46-53.
   Steel, Alloy, Rockwell C43-51.
   Steel, Corrosion Resisting (410 thru 420); Rockwell C46-55.
   Steel, Corrosion Resisting (302); work hardened.
4. EDGES: All sharp edges shall be broken.
5. DIMENSIONS: All dimensions are in inches.
6. TOLERANCES: Length L: All diameters thru 3/8":
   ±.010" for lengths thru 2"
   ±.015" for lengths over 2" thru 3"
   ±.025 for lengths over 3"
   All diameters larger than 3/8"
   ±.025 for all lengths
7. PART NUMBER: The MS part number consists of the MS number plus the dash number.
   Example: MS51923-37
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Referenced documents shall be of the issue in effect on the date of invitations for bid.
10. For functional limitations on usage of spring pins, see MS33547.
11. Patent number 2737843, patented 13 March 1956. The Government has a royalty free license under this patent for the benefit of manufacturers of this item either for the Government or for use in equipment to be delivered to the Government.

APPROVED 3 MARCH 1962 REVISED (A) 11 JUNE 1962 (B) 25 MAR 1965 (C) 23 MAY 1969

(C) ENTIRE STANDARD REVISED

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. VC	TITLE	MILITARY STANDARD
Other Cust 82	PIN, SPRING — TUBULAR, COILED, STANDARD DUTY	MS51923
PROCUREMENT SPECIFICATION: MIL-P-10971	SUPERSEDING: NFSI4 and NFSI4.1	SHEET 1 OF 4

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:13Z
Check the source to verify that this is the current version before use.

TABLE II

LENGTH L	CARBON STEEL 1070 - 1095 CADMIUM	CARBON STEEL 1070 - 1095 PHOS	CRES 302	CRES 410 THRU 420
	DASH NUMBER			
1/32 NOMINAL DIAMETER				
1/8			111	166
3/16			112	167
1/4			113	168
5/16			114	169
3/8			115	170
7/16			116	171
1/2			117	172
9/16			118	173
5/8			119	174
.039 NOMINAL DIAMETER				
1/8			120	175
3/16			121	176
1/4			122	177
5/16			123	178
3/8			124	179
7/16			125	180
1/2			126	181
9/16			127	182
5/8			128	183
3/64 NOMINAL DIAMETER				
1/8			129	184
3/16			130	185
1/4			131	186
5/16			132	187
3/8			133	188
7/16			134	189
1/2			135	190
9/16			136	191
5/8			137	192
.052 NOMINAL DIAMETER				
1/8			138	193
3/16			139	194
1/4			140	195
5/16			141	196
3/8			142	197
7/16			143	198
1/2			144	199
9/16			145	200
5/8			146	201
1/16 NOMINAL DIAMETER				
3/16	37	92	147	424
1/4	38	93	148	425
5/16	39	94	149	426
3/8	40	95	150	427
7/16	41	96	151	428
1/2	42	97	152	429
9/16	43	98	153	430
5/8	44	99	154	431
11/16	45	100	155	432
3/4	46	101	156	433

LENGTH L	CARBON STEEL 1070 - 1095 CADMIUM	CARBON STEEL 1070 - 1095 PHOS	CRES 302	CRES 410 THRU 420
	DASH NUMBER			
5/64 NOMINAL DIAMETER				
1/4	228	270	312	434
5/16	229	271	313	435
3/8	230	272	314	436
7/16	231	273	315	437
1/2	232	274	316	438
9/16	233	275	317	439
5/8	234	276	318	440
3/4	235	277	319	441
7/8	585	590	595	600
3/32 NOMINAL DIAMETER				
1/4	47	102	157	442
5/16	48	103	158	443
3/8	49	104	159	444
7/16	50	105	160	445
1/2	51	106	161	446
9/16	52	107	162	447
5/8	53	108	163	448
3/4	54	109	164	449
7/8	55	110	165	450
1	421	422	423	451
7/64 NOMINAL DIAMETER				
3/8	236	278	320	452
7/16	237	279	321	453
1/2	238	280	322	454
9/16	239	281	323	455
5/8	240	282	324	456
3/4	241	283	325	457
7/8	242	284	326	458
15/16	243	285	327	459
1	586	591	596	601
1-1/4	587	592	597	602
1-1/2	588	593	598	603
1/8 NOMINAL DIAMETER				
3/8	202	244	286	460
7/16	203	245	287	461
1/2	204	246	288	462
9/16	205	247	289	463
5/8	206	248	290	464
3/4	207	249	291	465
7/8	208	250	292	466
15/16	209	251	293	467
1	589	594	599	604
5/32 NOMINAL DIAMETER				
7/16	328	358	388	468
1/2	329	359	389	469
9/16	330	360	390	470
5/8	331	361	391	471
3/4	332	362	392	472
7/8	333	363	393	473
15/16	334	364	394	474

LENGTH L	CARBON STEEL 1070 - 1095 CADMIUM	CARBON STEEL 1070 - 1095 PHOS	CRES 302	CRES 410 THRU 420
	DASH NUMBER			
3/16 NOMINAL DIAMETER				
1/2	210	252	294	475
9/16	211	253	295	476
5/8	212	254	296	477
3/4	213	255	297	478
7/8	214	256	298	479
1	215	257	299	480
7/32 NOMINAL DIAMETER				
1/2	335	365	395	481
9/16	336	366	396	482
5/8	337	367	397	483
3/4	338	368	398	484
7/8	339	369	399	485
1	340	370	400	486
1-1/4	418	419	420	487
1/4 NOMINAL DIAMETER				
1/2	216	258	300	488
9/16	217	259	301	489
5/8	218	260	302	490
3/4	219	261	303	491
7/8	220	262	304	492
1	221	263	305	493
1-1/8	222	264	306	494
5/16 NOMINAL DIAMETER				
3/4	341	371	401	495
13/16	342	372	402	496
7/8	343	373	403	497
15/16	344	374	404	498
1	345	375	405	499
1-1/8	346	376	406	500
1-1/4	347	377	407	501
3/8 NOMINAL DIAMETER				
3/4	223	265	307	502
1	224	266	308	503
1-1/4	225	267	309	504
1-3/4	226	268	310	505
2	227	269	311	506
7/16 NOMINAL DIAMETER				
1	348	378	408	507
1-1/4	349	379	409	508
1-1/2	350	380	410	509
1-3/4	351	381	411	510
2	352	382	412	511
1/2 NOMINAL DIAMETER				
1-1/4	353	383	413	512
1-1/2	354	384	414	513
1-3/4	355	385	415	514
2	356	386	416	515
2-1/4	357	387	417	516

REVIEWER: AV, IS, MI, MU, NSA, 85
USER: AT, EL, GL, MC, ME, SN

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 3 MARCH 1962 REVISED (A) 11 JUNE 1962 (B) 25 MAR 1965 (C) FOR CHANGES SEE SHEET 1

P.A. MC
Other Cust 82

TITLE: PIN, SPRING — TUBULAR, COILED, STANDARD DUTY

MILITARY STANDARD
MS51923

PROCUREMENT SPECIFICATION: MIL-P-10971

SUPERSEDING: MF324 and MF324.1

SHEET 2 OF

DD FORM 672-1 (Reverse)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:13Z
Check the source to verify that this is the current version before use.

FSC. SUP CLASS
5315

REVIEWER: AV, IS, MI, MU, NSA, 85
USER: AT, EL, GL, MC, ME, SW

TABLE II - CONTINUED

LENGTH L	ALLOY STEEL 6150 PHOSPHATE DASH NUMBER	
	5/8 NOMINAL DIAMETER	3/4 NOMINAL DIAMETER
2	534	568
2-1/4	535	569
2-1/2	536	570
2-3/4	537	571
3	538	572
3-1/4	539	573
3-1/2	540	574
3-3/4	541	575
4	542	576
4-1/4	543	577
4-1/2	544	578
4-3/4	545	579
5	546	580
5-1/4	547	581
5-1/2	548	582
5-3/4	549	583
6	550	584

TABLE III. SUPERSEDED. The following are not manufactured or are not authorized for new design.

LENGTH L	CARBON STEEL ** 1070 - 1095 CADMIUM DASH NUMBER	CARBON STEEL ** 1070 - 1095 PHOSPHATE DASH NUMBER
1/32 NOMINAL DIAMETER		
1/8	1	56
3/16	2	57
1/4	3	58
5/16	4	59
3/8	5	60
7/16	6	61
1/2	7	62
9/16	8	63
5/8	9	64
.039 NOMINAL DIAMETER		
1/8	10	65
3/16	11	66
1/4	12	67
5/16	13	68
3/8	14	69
7/16	15	70
1/2	16	71
9/16	17	72
5/8	18	73

LENGTH L	CARBON STEEL ** 1070 - 1095 CADMIUM DASH NUMBER	CARBON STEEL ** 1070 - 1095 PHOSPHATE DASH NUMBER
3/64 NOMINAL DIAMETER		
1/8	19	74
3/16	20	75
1/4	21	76
5/16	22	77
3/8	23	78
7/16	24	79
1/2	25	80
9/16	26	81
5/8	27	82
.052 NOMINAL DIAMETER		
1/8	28	83
3/16	29	84
1/4	30	85
5/16	31	86
3/8	32	87
7/16	33	88
1/2	34	89
9/16	35	90
5/8	36	91

** Not manufactured.

APPROVED 3 MARCH 1962 REVISED (A) 11 JUNE 1962 (B) 25 MAR 1965 (C) FOR CHANGES SEE SHEET 1

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC Other Cust #2	TITLE PIN, SPRING — TUBULAR, COILED, STANDARD DUTY	MILITARY STANDARD MS51923
PROCUREMENT SPECIFICATION MIL-P-10971	SUPERSEDES BFS14 and BFSI4.1	SHEET 3 OF

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:13Z
Check the source to verify that this is the current version before use.

TABLE IV. SUPERSEDED. The following are not manufactured or are not authorized for new design. (CONTINUED)

LENGTH L	ALLOY STEEL ooo 6150	
	CADMIUM	
	DASH NUMBER	
	5/8 NOMINAL DIAMETER	3/4 NOMINAL DIAMETER
2	517	551
2-1/4	518	552
2-1/2	519	553
2-3/4	520	554
3	521	555
3-1/4	522	556
3-1/2	523	557
3-3/4	524	558
4	525	559
4-1/4	526	560
4-1/2	527	561
4-3/4	528	562
5	529	563
5-1/4	530	564
5-1/2	531	565
5-3/4	532	566
6	533	567

REVIEWER: AV, 13, MI, MO, NSA, 85
USER: AV, EL, GL, MC, ME, SH

TABLE IV - INTERCHANGEABILITY

The following pins covered by dash numbers given in MS51923(WC), Revision B, are inactivated or not manufactured after 23 MAY 1969 and are not to be used for new design. For new design and replacement, the following is recommended.

SUPERSEDED MS51923(WC) DASH NUMBER	RECOMMENDED REPLACEMENTS MS51923 DASH NUMBER	SUPERSEDED MS51923(WC) DASH NUMBER	RECOMMENDED REPLACEMENTS MS51923 DASH NUMBER	SUPERSEDED MS51923(WC) DASH NUMBER	RECOMMENDED REPLACEMENTS MS51923 DASH NUMBER	SUPERSEDED MS51923(WC) DASH NUMBER	RECOMMENDED REPLACEMENTS MS51923 DASH NUMBER
1	111 166	28	138 193	74	129 184	526	543
2	112 167	29	139 194	75	130 185	527	544
3	113 168	30	140 195	76	131 186	528	545
4	114 169	31	141 196	77	132 187	529	546
5	115 170	32	142 197	78	133 188	530	547
6	116 171	33	141 198	79	134 189	531	548
7	117 172	34	144 199	80	135 190	532	549
8	118 173	35	145 200	81	136 191	533	550
9	119 174	36	146 201	82	137 192	551	568
10	120 175	56	111 166	83	138 193	552	569
11	121 176	57	112 167	84	139 194	553	570
12	122 177	58	113 168	85	140 195	554	571
13	123 178	59	114 169	86	141 196	555	572
14	124 179	60	115 170	87	142 197	556	573
15	125 180	61	116 171	88	143 198	557	574
16	126 181	62	117 172	89	144 199	558	575
17	127 182	63	118 173	90	145 200	559	576
18	128 183	64	119 174	91	146 201	560	577
19	129 184	65	120 175	517	534	561	578
20	130 185	66	121 176	518	535	562	579
21	131 186	67	122 177	519	536	563	580
22	132 187	68	123 178	520	537	564	581
23	133 188	69	124 179	521	538	565	582
24	134 189	70	125 180	522	539	566	583
25	135 190	71	126 181	523	540	567	584
26	136 191	72	127 182	524	541		
27	137 192	73	128 183	525	542		

ooo Inactivated. Do not use for new design.

APPROVED 3 MARCH 1962 REVISED (A) 11 JUNE 1962 (B) 25 MAR 1965 (C) FOR CHANGES SEE SHEET 1

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design application and for repetitive use shall be made from this document.

P.A. WC Other Coop 92	TITLE PIN, SPRING — TUBULAR, COILED, STANDARD DUTY	MILITARY STANDARD MS51923
PROCUREMENT SPECIFICATION MIL-P-10971	SUPERSEDES AFSX4 and AFSX4.1	SHEET 4 OF

DD FORM 672-1

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-520/A-7137

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:13Z
Check the source to verify that this is the current version before use.