
FED. SUP CLASS 5305

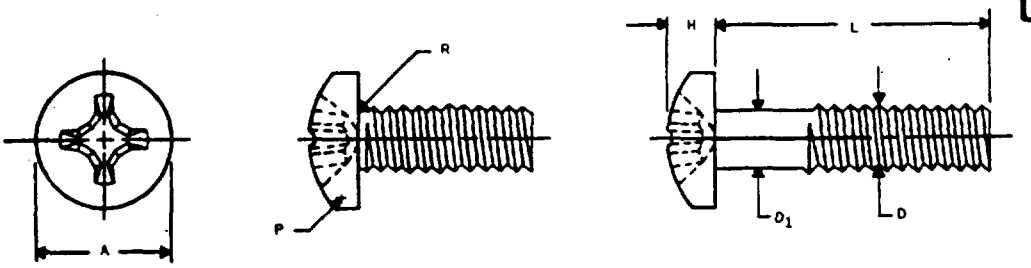

D NOMINAL SIZE		.060	.086	.112	.138	.164
THREADS PER INCH		80UNF	64UNF	48UNF	40UNF	36UNF
D1 BODY DIAMETER	MAX	.0600	.0860	.1120	.1380	.1640
	MIN	.0496	.0733	.0954	.1184	.1424
A HEAD DIAMETER	MAX	.116	.167	.219	.270	.322
	MIN	.104	.155	.205	.256	.306
H HEAD HEIGHT	MAX	.044	.062	.080	.097	.115
	MIN	.036	.053	.070	.087	.105
P HEAD RADIUS	MIN	.005	.010	.010	.015	.015
R FILLET RADIUS	MAX	.009	.013	.017	.021	.025
DRIVER SIZE		0	1	1	2	2
** MINIMUM TENSILE STRENGTH LOAD LBS.		140	310	530	810	1,180

L	LENGTH	TOLERANCE	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
THREADED TO WITHIN A DISTANCE OF NOT LESS THAN 2 THREADS OF THE BEARING SURFACE OF THE HEAD	1/8	+0 -1/32	120	1	11	24	39
	3/16		121	2	12	25	40
	1/4		122	3	13	26	41
	5/16		123	4	14	27	42
	3/8		124	5	15	28	43
	7/16		125	6	16	29	44
	1/2		126	7	17	30	45
	5/8			8	18	31	46
	3/4			9	19	32	47
	7/8			10*	20	33	48
	1				21	34	49
	1-1/4	+0 -1/16			22*	35	50
	1-1/2				23*	36	51
	1 3/4					37	52
	2					38	53
MINIMUM COMPLETE THREAD LENGTH OF 1-3/4	2-1/4	+0 -3/32					54*
	2-1/2						55*
	2-3/4						56*
	3						57*

* INDICATES MANUFACTURER'S NON-STOCK PRODUCTION ITEMS.
** BASED ON 80,000 PSI MINIMUM TENSILE STRENGTH. LOAD POUNDS ARE CALCULATED BY THE STRESS AREAS INDICATED IN FED-STD-H28.

REQUIREMENTS:-

1. MATERIAL: STEEL, CORROSION-RESISTING, 300 SERIES AS SPECIFIED IN QQ-S-763 AND FED-STD-66, COMPOSITION 304 OR 316 OR EQUAL TO OR INTERCHANGEABLE WITH 16:18 OR 18:8 CHROMIUM-NICKEL ALLOY STEEL.

2. PROTECTIVE COATING OR TREATMENT: CLEANED AND DESCALED IN ACCORDANCE WITH ASTM A380-78. BLACK OXIDE COATING IN ACCORDANCE WITH PROCUREMENT SPECIFICATION (WHEN BLACK OXIDE COATING IS REQUIRED, THE DASH NUMBER SHALL BE FOLLOWED BY A "B").

3. MAGNETIC PERMEABILITY: THE SCREW SHALL MEET THE MAGNETIC PERMEABILITY REQUIREMENTS OF THE PROCUREMENT SPECIFICATION.

4. THREADS: THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2.

5. RECESS: THE RECESS SHALL BE IN ACCORDANCE WITH MS9006.

6. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER AND CODE LETTER IF APPLICABLE (SEE REQ. 2).
EXAMPLE: MS51958-45; CLEANED AND DESCALED.
MS51958-45B; BLACK OXIDE COATED.

NOTES:-

1. DIMENSIONS: ALL DIMENSIONS ARE IN INCHES.

2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(C) ENTIRE STANDARD REVISED

APPROVED 12 DEC 63 — REVISED (A) 16 DEC 1968 — (B) 2 APR 1971 — (C) 11 FEB 85

User activities:
ARMY-MC
NAVY-MC

Revie. activities:
AMMY - AT, AV, EA, MI
AIR FORCE - 82
DLA - IS
NSA - NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AR Other Cust AS 99	OPERATIONAL INTEREST	TITLE SCREW, MACHINE PAN-HEAD, CROSS-RECESSED, CORROSION RESISTING STEEL, UNF-2A	MILITARY STANDARD MS 51958
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35217, MS35254 AND IN PART: MS35357, MS35359 THRU MS35362, MS35364 THRU MS35366, AN520 AND AN526.		PAGE 1 OF 4

DD FORM 672-1 (COORDINATED) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE — 5305-1511

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:14Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

D	NOMINAL SIZE		.190	.250	.3125	.375
	THREADS PER INCH		32UNF	28UNF	24UNF	24UNF
D_1	BODY DIAMETER	MAX	.1900	.2500	.3125	.3750
		MIN	.1658	.2225	.2806	.3430
A	HEAD DIAMETER	MAX	.373	.492	.615	.740
		MIN	.357	.473	.594	.716
H	HEAD HEIGHT	MAX	.133	.175	.218	.261
		MIN	.122	.162	.203	.244
P	HEAD RADIUS	MIN	.020	.035	.040	.040
R	FILLET RADIUS	MAX	.029	.038	.047	.056
	DRIVER SIZE		2	3	4	4
**	MINIMUM TENSILE STRENGTH LOAD LBS.		1,600	2,930	4,640	7,020
L	LENGTH	TOLERANCE	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
THREADED TO WITHIN A DISTANCE OF NOT LESS THAN 2 THREADS OF THE BEARING SURFACE OF THE HEAD	1/8	+0 -1/32	58*			
	3/16		59			
	1/4		60	76		
	5/16		61	77	92	
	3/8		62	78	93	
	7/16		63	79	94	107
	1/2		64	80	95	108
	5/8		65	81	96	109
	3/4		66	82	97	110
	7/8		67	83	98	111
	1		68	84	99	112
	1-1/4	+0 -1/16	69	85	100	113
	1-1/2		70	86	101	114
	1-3/4		71	87	102	115
	2		72	88	103	116
MINIMUM COMPLETE THREAD LENGTH OF 1-3/4	2-1/4	+0 -3/32	73	89	104	117
	2-1/2		74*	90*	105*	118
	2-3/4		75*	91*	106*	119
	3					

* Indicates manufacturer's non-stock production items.

** Based on 80,000 PSI minimum tensile strength. Load pounds are calculated by the stress areas indicated in FED-STD-H28

NOTE: For Applicable Requirements and Notes, See page 1.

APPROVED 12 DEC 63 REVISED © FOR CHANGES SEE PAGES 1, 2, 3 AND 4

User activities: ARMY-ME NAVY-MC

Preparing activities: ARMY - AT, AV, EA, MI AIR FORCE - 82 DLA - IS NSA - NS

This military standard is approved for use by all departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AR Other Cust AS 99	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE-PAN HEAD, CROSS RECESSED, CORROSION RESISTING STEEL, UNF-2A	MILITARY STANDARD MS 51958
PROCUREMENT SPECIFICATION	SUPERSEDING MS35217, MS35234 AND IN PART: MS35357, MS35359 THRU MS35362, MS35364 THRU MS35366, AN520 AND AN526.		PAGE 2 OF 4

DD FORM 672-1 (COORDINATED) *PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1511

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:14Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

INTERCHANGEABILITY TABLE

The screws covered by the dash numbers given in MS35217, MS35234, AN520 in part and AN526 in part, are cancelled/inactivated after the dates indicated on the documents. Use the dash numbers given in the preceding sheets. The cancelled screws cannot always replace the new screws and should be used until existing stocks are depleted. Use only the new screws for design and replacement. Replacement shall be in accordance with this table.

CROSS REFERENCE OF PART NUMBERS

CANCELLED						NEW
MS35234	MS35217	AN520		AN526		MS51958
DASH NUMBER						DASH NUMBER
		COR2 thru C1R8	C0-2 thru C1-8			No Replacement
1	1					1
2	2	C2R3	C2-3			2
3	3	C2R4	C2-4			3
4	4	C2R5	C2-5			4
5	5	C2R6	C2-6			5
6	6	C2R7	C2-7			6
7	7	C2R8	C2-8			7
8	8	C2R10	C2-10			8
9	9	C2R12	C2-12			9
10						10
		C3R3 thru C3R12	C3-3 thru C3-12			No Replacement
11	10					11
12	11	C4R3	C4-3			12
13	12	C4R4	C4 4			13
14	13	C4R5	C4-5			14
15	14	C4R6	C4-6			15
16	15	C4R7	C4-7			16
17	16	C4R8	C4-8			17
18	17	C4R10	C4-10			18
19	18	C4R12	C4-12			19
20	19	C4R14	C4-14			20
21	20	C4R16	C4-16			21
		C4R18	C4-18			No Replacement
22		C4R20	C4-20			22
		C4R22	C4-22			No Replacement
23		C4R24	C4-24			23
		C4R26	C4-26			No Replacement
		C4R28	C4-28			No Replacement
		C5R4 thru C5R28	C5-4 thru C5-28			No Replacement
24	21					24
25	22					25
26	23	C6R4	C6-4	C640R4	C640-4	26
27	24	C6R5	C6-5	C640R5	C640-5	27
28	25	C6R6	C6-6	C640R6	C640-6	28
29	26	C6R7	C6-7	C640R7	C640-7	29
30	27	C6R8	C6-8	C640R8	C640-8	30
				C640R9	C640-9	No Replacement
31	28	C6R10	C6-10	C640R10	C640-10	31
32	29	C6R12	C6-12	C640R12	C640-12	32
33	30	C6R14	C6-14	C640R14	C640-14	33
34	31	C6R16	C6-16	C640R16	C640-16	34
		C6R18	C6-18	C640R18	C640-18	No Replacement
35	32	C6R20	C6-20	C640R20	C640-20	35
		C6R22	C6-22	C640R22	C640-22	No Replacement
36	33	C6R24	C6-24	C640R24	C640-24	36
		C6R26	C6-26	C640R26	C640-26	No Replacement
37	34	C6R28	C6-28	C640R28	C640-28	37
		C6R30	C6-30	C640R30	C640-30	No Replacement
38	35	C6R32	C6-32	C640R32	C640-32	38
		C6R36	C6-36	C640R36	C640-36	No Replacement
		C6R40	C6-40	C640R40	C640-40	No Replacement
				C640R44	C640-44	No Replacement
				C640R48	C640-48	No Replacement
39	36					39
40	37					40
41	38	C8R4	C8-4	C836R4	C836-4	41
42	39	C8R5	C8-5	C836R5	C836-5	42
43	40	C8R6	C8-6	C836R6	C836-6	43
44	41	C8R7	C8-7	C836R7	C836-7	44
45	42	C8R8	C8-8	C836R8	C836-8	45
				C836R9	C836-9	No Replacement
46	43	C8R10	C8-10	C836R10	C836-10	46
47	44	C8R12	C8-12	C836R12	C836-12	47
48	45	C8R14	C8-14	C836R14	C836-14	48
49	46	C8R16	C8-16	C836R16	C836-16	49
		C8R18	C8-18	C836R18	C836-18	No Replacement
50	47	C8R20	C8-20	C836R20	C836-20	50
		C8R22	C8-22	C836R22	C836-22	No Replacement
51	48	C8R24	C8-24	C836R24	C836-24	51
		C8R26	C8-26	C836R26	C836-26	No Replacement

(CONTINUED ON PAGE 4)

User activities:
ARMY-ME
NAVY-MC

Review activities
ARMY - AT, AV, EA, MI
DLA - IS
NSA - NS

This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, When applicable:

APPROVED 12 DEC 63 REVISED (C) FOR CHANGES SEE PAGES 1, 2, 3 AND 4

P. & A. AR Other Cust AS 99	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE PAN HEAD CROSS RECESSED, CORROSION RESISTING STEEL, UNF 2A	MILITARY STANDARD MS 51958 PAGE 3 OF 4
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDING MS35217, MS35234 and in part: MS35357, MS35359 thru MS35362, MS35364 thru MS35366, AN520 and AN526.		

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1511

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:14Z
Check the source to verify that this is the current version before use.

INTERCHANGEABILITY TABLE
(Continued)

FED. SUP CLASS 5305

CROSS REFERENCE OF PART NUMBERS

CANCELLED						NEW
MS35234	MS35217	AN520		AN526		MS51958
DASH NUMBER						DASH NUMBER
52	49	C8R28	C8-28	C836R28	C836-28	52
		C8R30	C8-30	C836R30	C836-30	No Replacement
53	50	C8R32	C8-32	C836R32	C836-32	53
54		C8R36	C8-36	C836R36	C836-36	54
55		C8R40	C8-40	C836R40	C836-40	55
56		C8R44	C8-44	C836R44	C836-44	56
57		C8R48	C8-48	C836R48	C836-48	57
58						58
59	51	C10R4	C10-4	C1032R4	C1032-4	59
60	52	C10R5	C10-5	C1032R5	C1032-5	60
61	53	C10R6	C10-6	C1032R6	C1032-6	61
62	54	C10R7	C10-7	C1032R7	C1032-7	62
63	55	C10R8	C10-8	C1032R8	C1032-8	63
				C1032R9	C1032-9	No Replacement
64	56	C10R10	C10-10	C1032R10	C1032-10	64
65	57	C10R12	C10-12	C1032R12	C1032-12	65
66	58	C10R14	C10-14	C1032R14	C1032-14	66
67	59	C10R16	C10-16	C1032R16	C1032-16	67
		C10R18	C10-18	C1032R18	C1032-18	No Replacement
68	60	C10R20	C10-20	C1032R20	C1032-20	68
		C10R22	C10-22	C1032R22	C1032-22	No Replacement
69	61	C10R24	C10-24	C1032R24	C1032-24	69
		C10R26	C10-26	C1032R26	C1032-26	No Replacement
70	62	C10R28	C10-28	C1032R28	C1032-28	70
		C10R30	C10-30	C1032R30	C1032-30	No Replacement
71	63	C10R32	C10-32	C1032R32	C1032-32	71
72	64	C10R36	C10-36	C1032R36	C1032-36	72
73	65	C10R40	C10-40	C1032R40	C1032-40	73
74		C10R44	C10-44	C1032R44	C1032-44	74
75		C10R48	C10-48	C1032R48	C1032-48	75
76	66					76
77	67	C416R6	C416-6	C428R6	C428-6	77
78	68	C416R7	C416-7	C428R7	C428-7	78
79	69	C416R8	C416-8	C428R8	C428-8	79
				C428R9	C428-9	No Replacement
80	70	C416R10	C416-10	C428R10	C428-10	80
81	71	C416R12	C416-12	C428R12	C428-12	81
82	72	C416R14	C416-14	C428R14	C428-14	82
83	73	C416R16	C416-16	C428R16	C428-16	83
		C416R18	C416-18	C428R18	C428-18	No Replacement
84	74	C416R20	C416-20	C428R20	C428-20	84
		C416R22	C416-22	C428R22	C428-22	No Replacement
85	75	C416R24	C416-24	C428R24	C428-24	85
		C416R26	C416-26	C428R26	C428-26	No Replacement
86	76	C416R28	C416-28	C428R28	C428-28	86
		C416R30	C416-30	C428R30	C428-30	No Replacement
87	77	C416R32	C416-32	C428R32	C428-32	87
88	78	C416R36	C416-36	C428R36	C428-36	88
89	79	C416R40	C416-40	C428R40	C428-40	89
90		C416R44	C416-44	C428R44	C428-44	90
91		C416R48	C416-48	C428R48	C428-48	91
92	80					92
93	81					93
94	82					94
95	83					95
96	84					96
97	85					97
98	86					98
99	87					99
100	88					100
101	89					101
102	90					102
103	91					103
104	92					104
105						105
106						106
107	93					107
108	94					108
109	95					109
110	96					110
111	97					111
112	98					112
113	99					113
114	100					114
115	101					115
116	102					116
117	103					117
118	104					118
119	105					119

APPROVED 12 DEC 63 REVISED © FOR CHANGES SEE PAGES 1, 2, 3 and 4

P. A. AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust AS 99		SCREW, MACHINE-PAN HEAD, CROSS RECESSED, CORROSION RESISTING STEEL, UNF-2A	MS 51958
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35217, MS35234 AND IN PART: MS35357, MS35359 THRU MS35362, MS35362, MS35364 THRU MS35366, AN520 AND AN526		PAGE 4 OF 4

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1511

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 — 606-034/1690

User activities:
ARMY-ME
NAVY-MC

Review activities:
ARMY - AT, AV, EA, MI
DLA - IS
NSA - NS

This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications, and for repetitive use shall be made from this document. When applicable:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:14Z
Check the source to verify that this is the current version before use.