FED. SUP CLASS
4720

CONFIGURATION AND MATERIAL CORROSION RESISTANT STEEL (450°F)	FITTING ENDS (MIL-F-27272)		(MIL-H-27267) HOSE CUT OFF FACTOR (HCOF) INCHES VS HOSE DASH SIZE NO									
1 2	1	2	-3/-4C	-4C	-5C	-6C	-8C	-10C	-12C	-16C	-20C	-24C
 ASSEMBLY LENGTH TYPICAL STYLE A	MS27053	MS27053	1.40	1.48	1.54	1.62	1.86	2.10	2.26	2.60	2.88	3.32
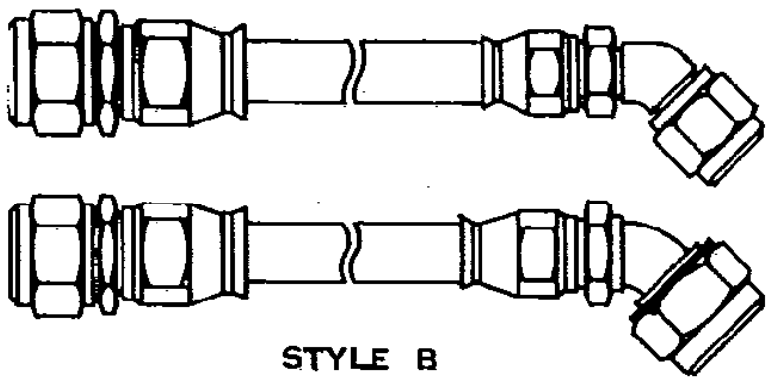 STYLE B	MS27053	MS27059	1.78	1.92	1.99	2.10	2.72					
	MS27053	MS27055						2.63	3.18	3.44	3.86	4.41
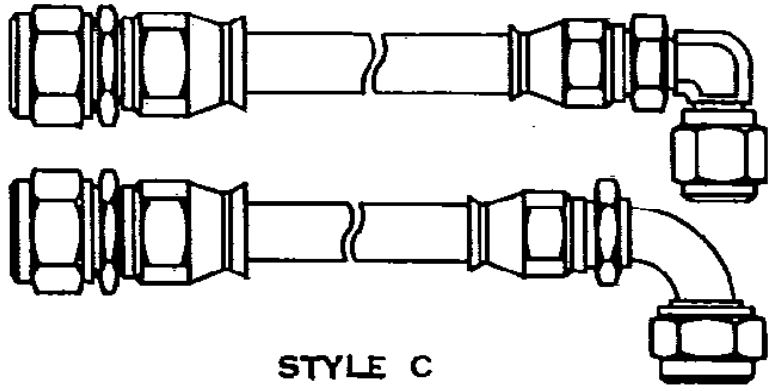 STYLE C	MS27053	MS27060	1.56	1.65	1.74	1.84	2.24					
	MS27053	MS27057						2.46	3.05	3.35	3.78	4.34
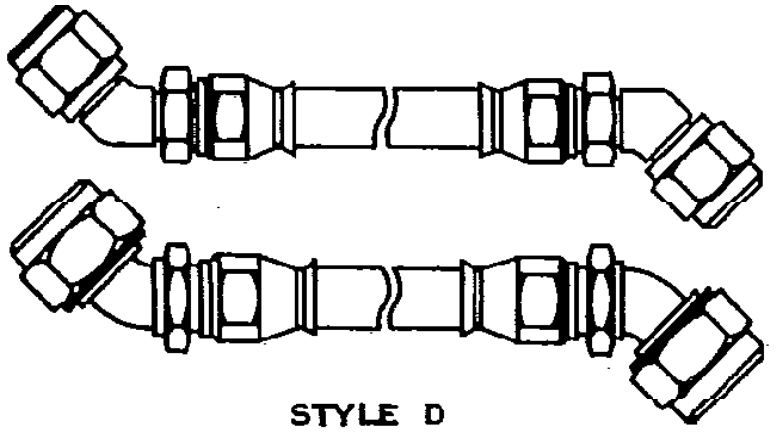 STYLE D	MS27059	MS27059	2.16	2.36	2.44	2.58	3.58					
	MS27055	MS27055						3.16	4.10	4.28	4.84	5.50
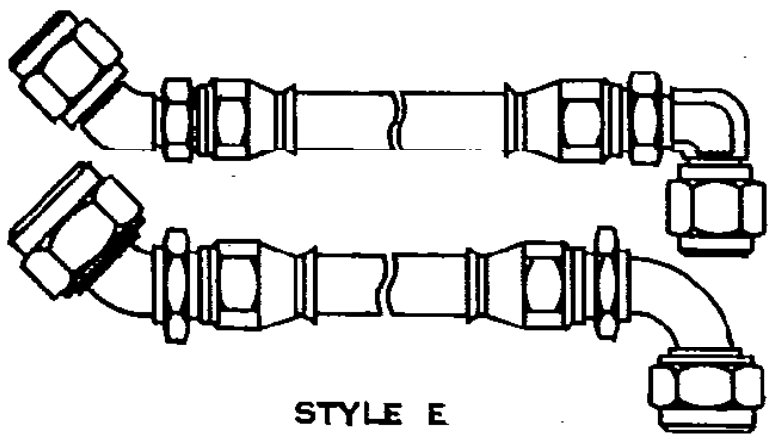 STYLE E	MS27059	MS27060	1.94	2.09	2.19	2.32	3.10					
	MS27055	MS27057						2.99	3.97	4.19	4.76	5.43
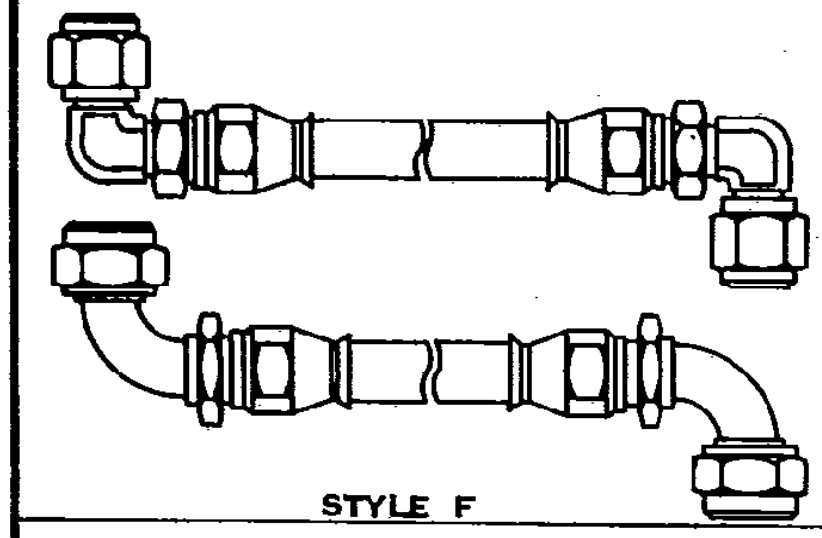 STYLE F	MS27060	MS27060	1.72	1.82	1.94	2.06	2.62					
	MS27057	MS27057						2.82	3.84	4.10	4.68	5.36

EXAMPLE OF HOSE CUTOFF FACTOR:
FOR A -4, 1/4 TUBE OD, 18-1/2 ASSEMBLY LENGTH, STYLE D,
THE BULK HOSE LENGTH = 18.50 - THE HCOF = 18.50 - 2.36 = 16.14.
BULK HOSE LENGTH REQUIRED IS 16.14 INCHES.

FITTINGS TO MATE WITH PARTS DESIGNED TO MS33656.

Ⓒ ENTIRE STANDARD REVISED.

APPROVED 20 FEB 67 REVISED Ⓐ 16 AUG 71 Ⓑ 15 DEC 76 Ⓒ 30 June 1985

User Activities: Army - AR, MI
Navy - SH
Air Force -
DLA -

Review Activities: Army - GL
Navy -
Air Force -
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLARE	MILITARY STANDARD MS 8000
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES:	SHEET 1 of 4 FSC 4720

Project No. 4720-0531

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

CONFIGURATION AND MATERIAL COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (275°F) 1 — 2	FITTING ENDS (MIL-F-27272) 1	2	(MIL-H-27267) HOSE CUT OFF FACTOR (HCOF) INCHES VS HOSE DASH SIZE NO. -8	-10	-12	-16	-20	-24
ASSEMBLY LENGTH TYPICAL  STYLE G	MS27053	MS27053	1.86	2.10	2.26	2.60	2.88	3.32
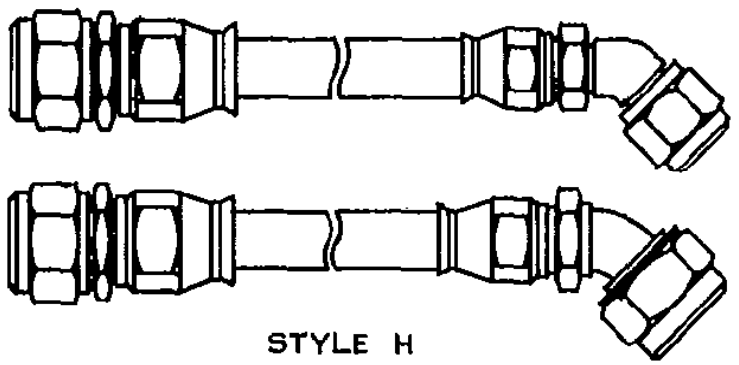 STYLE H	MS27053	MS27059	2.72					
	MS27053	MS27055		2.63	3.18	3.44	3.86	4.41
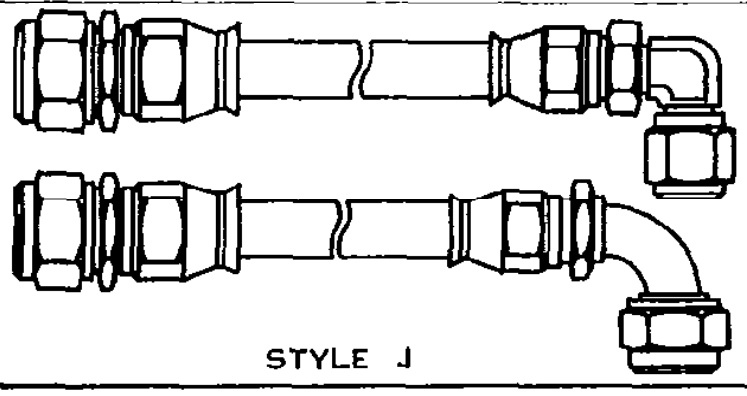 STYLE J	MS27053	MS27060	2.24					
	MS27053	MS27057		2.46	3.05	3.35	3.78	4.34
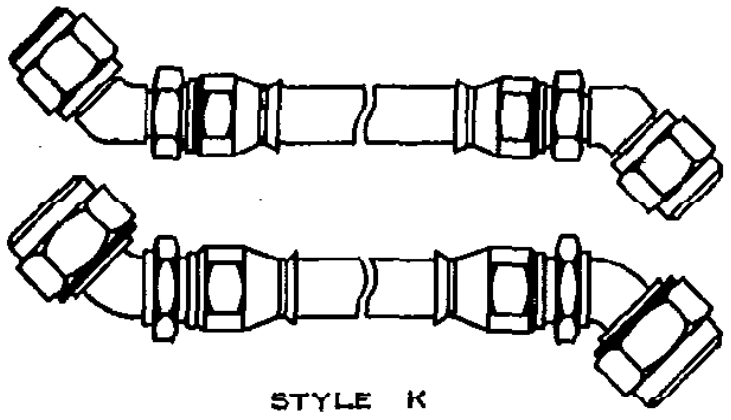 STYLE K	MS27059	MS27059	3.58					
	MS27055	MS27055		3.16	4.10	4.28	4.84	5.50
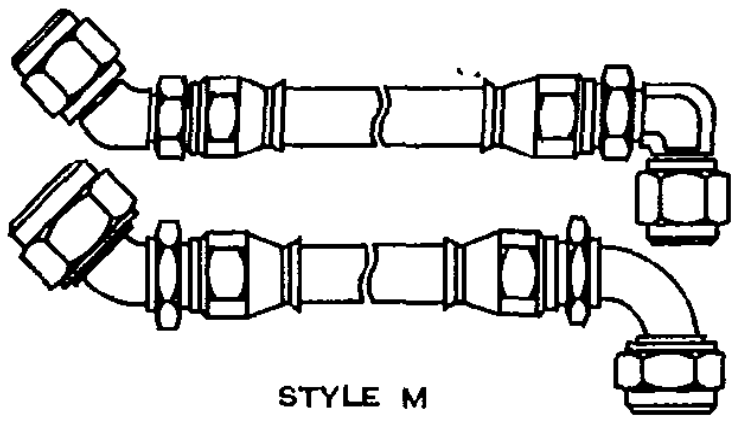 STYLE M	MS27059	MS27060	3.10					
	MS27055	MS27057		2.99	3.97	4.19	4.76	5.43
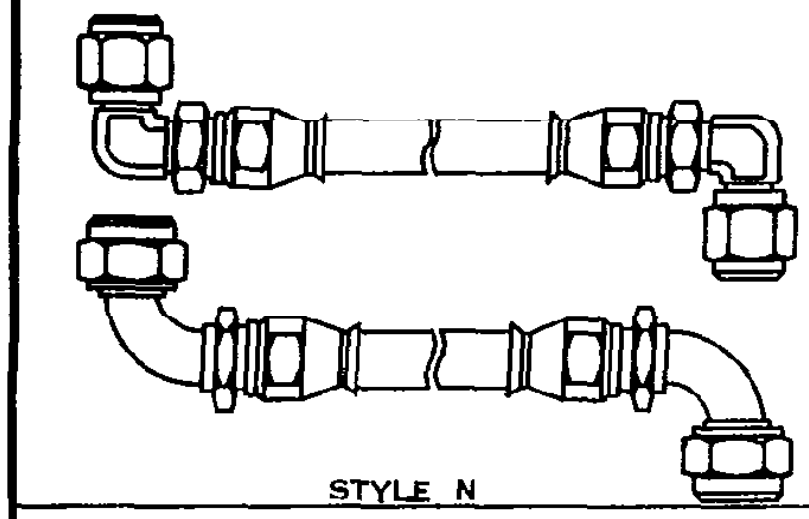 STYLE N	MS27060	MS27060	2.62					
	MS27057	MS27057		2.82	3.84	4.10	4.68	5.36

FED. SUP CLASS 4720

EXAMPLE OF HOSE CUTOFF FACTOR:
FOR A -8, 1/2 TUBE OD, 18-1/2 ASSEMBLY LENGTH, STYLE K,
THE BULK HOSE LENGTH = 18.50 - THE HCOF = 18.50 - 3.58 = 14.92.
BULK HOSE LENGTH REQUIRED IS 14.92 INCHES.

FITTINGS TO MATE WITH PARTS DESIGNED TO MS33656.

User Activities: Army - AR, MI
Navy - SH
Air Force -
DLA -

Review Activities: Army - GL
Navy -
Air Force -
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 20 FEB 67 REVISED Ⓐ 16 AUG 71 Ⓑ 15 DEC 76 Ⓒ 30 June 1985

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLARE	MILITARY STANDARD MS 8000
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES:	SHEET 2 of 4 FSC 4720

Project No. 4720-0531

USER ACTIVITIES Army - AR, MI
Navy - SH
Air Force -
DLA -

REVIEWER ACTIVITIES: Army - GL
Navy -
Air Force -
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED. SUP CLASS
4720

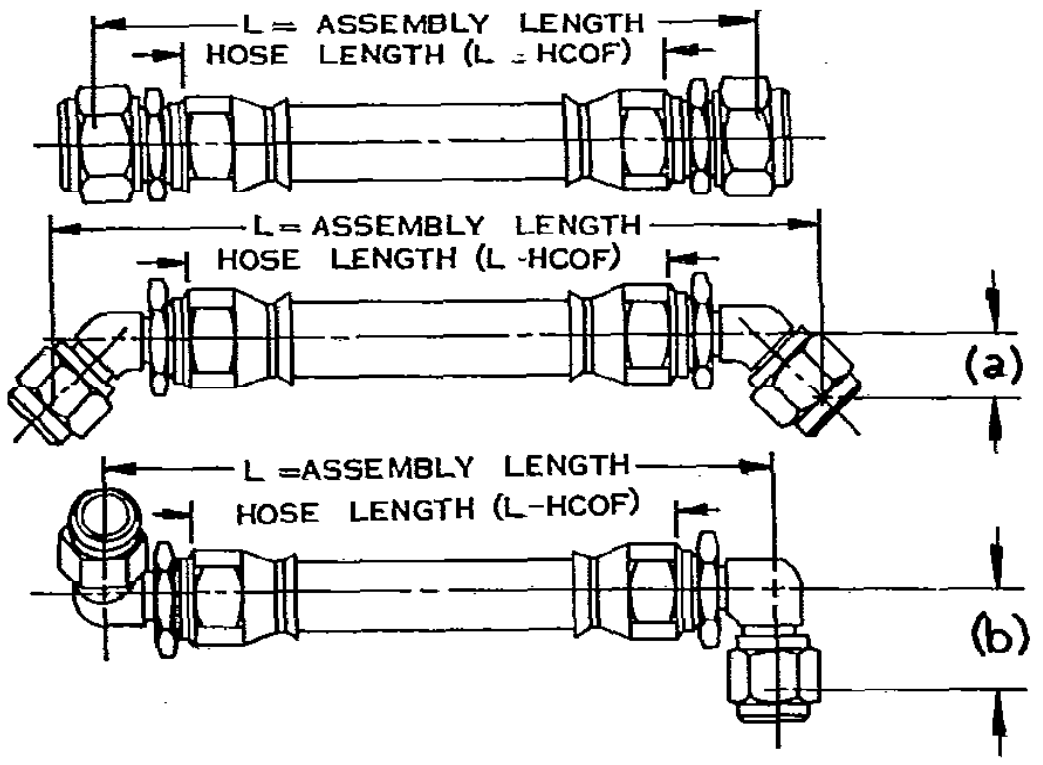

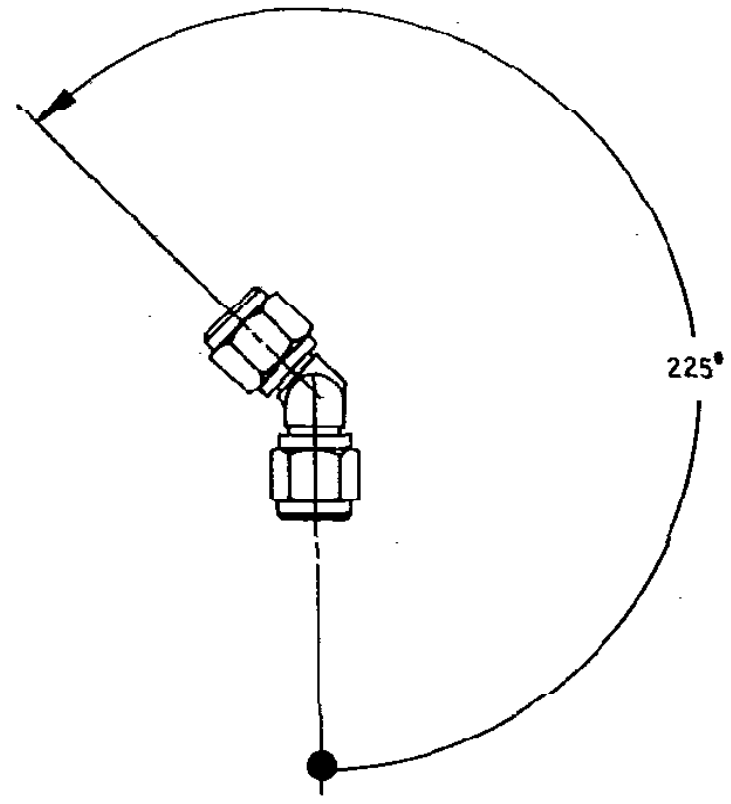

EXAMPLE OF ANGULAR ALIGNMENT OF END FITTING

DASH NO.	TUBING O.D. REF	SIZE	DROP HEIGHT OF ELBOW FITTING MAX	
			(a)	(b)
-3/-4	NOTE 2	B	.303	.550
-4	1/4	E	.342	.600
-5	5/16	F	.360	.675
-6	3/8	G	.409	.740
-8	1/2	H	.485	.850
-10	5/8	J	.571	1.161
-12	3/4	K	.658	1.411
-16	1	M	.695	1.535
-20	1-1/4	N	.803	1.817
-24	1-1/2	P	.902	2.067

ANGLE BETWEEN ELBOW FITTINGS, WHEN PROJECTED ON A PLANE PERPENDICULAR TO THE HOSE AXIS SHALL BE SPECIFIED. SIGHTING ALONG THE AXIS OF THE HOSE, THE ANGLE SPECIFIED WILL BE THE ANGLE THAT THE FURTHERST ELBOW FITTING SHOULD BE ROTATED COUNTER-CLOCKWISE. TOLERANCE ON ANGULAR ALIGNMENT ± 2°.

LENGTH "L" TO BE MEASURED BETWEEN CENTERS OF NIPPLE ENDS ALONG A STRAIGHT LINE PARALLEL TO HOSE LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.

HOSE IN ACCORDANCE WITH MIL-H-27267.

HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:

UNDER 12 INCHES LONG, NOT LESS THAN 1/8 INCH INCREMENTS. TOLERANCE ± 1/8.
12 TO 18 INCHES LONG, NOT LESS THAN 1/4 INCH INCREMENTS. TOLERANCE ± 1/8.
OVER 18 INCHES LONG, NOT LESS THAN 1/2 INCH INCREMENTS.
TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4.
TOLERANCE FOR LENGTHS FROM 36 TO 50 INCHES ± 1/2.
TOLERANCE FOR LENGTHS OVER 50 INCHES ± 1%.

THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE O.D., LENGTH, STYLE, AND ANGLE BETWEEN ELBOWS, AS APPLICABLE.

EXAMPLES OF PART NO.

MS8000H180F*030

HOSE ASSEMBLY FOR 1/2 INCH TUBE O.D., 18 INCHES IN LENGTH, 30° BETWEEN ELBOWS.

- ANGLE BETWEEN ELBOWS IN DEGREES (NOT REQUIRED FOR STYLES A,B,C,G,H, AND J)
- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 AND 2)
- LENGTH IN EIGHTS (1/8) OF AN INCH
- LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, 07, ETC.)
- SIZE H = -8 or 1/2 INCH TUBE O.D.

MS8000J092B*

HOSE ASSEMBLY FOR 5/8 INCH TUBE O.D., 9-1/4 INCHES IN LENGTH.

- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING MATERIAL ASSEMBLY (SEE SHEETS 1 AND 2)
- LENGTH IN EIGHTS (1/8) OF AN INCH
- LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, ETC.)
- SIZE J = -10 or 5/8 INCH TUBE O.D.

* ADD CODE LETTER AS FOLLOWS FOR ADDITIONAL FEATURES (IF REQUIRED)

APPROVED 20 FEB 67 REVISED Ⓐ 16 AUG 71 Ⓑ 15 DEC 76 Ⓒ 30 June 1985

P. A. AIR FORCE-11 **Other Cust** ARMY - AV NAVY - AS	**INTERNATIONAL INTEREST**	**TITLE** HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLARE	**MILITARY STANDARD** **MS 8000**
PROCUREMENT SPECIFICATION MIL-H-25579	**SUPERSEDES:**		SHEET 3 of 4 FSC 4720

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE Project No. 4720-0531

FED. SUP CLASS
4720

"A"	AS1072 SLEEVE, FIRE PROTECTION, SILICONE COVERED, -65°F (-54°C) THRU +500°F (+269°C) SECURED WITH CRES BANDS AS REQUIRED.
"B"	AS1073 - CODE BE SLEEVE, ABRASION PROTECTION, HEAT SHRINKABLE, BLACK POLYOLEFIN, -65°F (-54°C) THRU +250°F (+121°C).
"C"	AS1291 - CODE A SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS WHITE TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"D"	AS1291 - CODE C SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS TRANSPARENT FEP, -65°F (-54°C) THRU +350°F (+177°C) SECURED WITH CRES BANDS AS REQUIRED.
"E"	AS1298 SLEEVE, HEAVY WALL CHAFE GUARD, EXTRUDED SEAMLESS BLACK TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"L"	LOCKWIRE HOLE
"F"	CODE A + L
"G"	CODE B + L
"H"	CODE C + L
"J"	CODE D + L
"K"	CODE E + L

NOTES:

1. IN COMBINATION CRES AND ALUMINUM FITTINGS, THE SOCKET, SLEEVE, AND RETAINER WIRE ARE CORROSION RESISTING STEEL. THE OTHER PARTS ARE ALUMINUM.
2. A -3/-4 ASSEMBLY CONSISTS OF -3 TUBE O.D. FITTINGS WITH -4 TUBE O.D. HOSE.
3. DIMENSIONS IN INCHES.
4. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. FOR DETAIL DESIGN AND SIZE OF END FITTINGS, SEE CORRESPONDING DASH NUMBER ON APPLICABLE MS DRAWING.
7. FOR "IDENTIFICAITON OF PRODUCT," SEE PROCUREMENT SPECIFICATION.
8. THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS/FIBERGLAS, SHALL BE COATED WITH RTV RUBBER.

APPROVED 20 FEB 67 REVISED Ⓐ 16 AUG 71 Ⓑ 15 DEC 76 Ⓒ 30 June 1985

USER ACTIVITIES: Army - AR, MI
Navy - SH
Air Force -
DLA -

REVIEWER ACTIVITIES: Army - GL
Navy -
Air Force -
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P. A.
AIR FORCE - 11
Other Cust
ARMY - AV
NAVY - AS

INTERNATIONAL INTEREST

TITLE
HOSE ASSEMBLY, DETACHABLE FITTINGS,
TETRAFLUOROETHYLENE, HIGH TEMPERATURE,
MEDIUM PRESSURE, FLARE TO FLARE

MILITARY STANDARD

MS 8000

PROCUREMENT SPECIFICATION
MIL-H-25579

SUPERSEDES:

SHEET 4 of 4 FSC 4720

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 4720-0531