INCH-POUND

MS9886A
22 May 2013
SUPERSEDING
MS9886
3 March 1969

DETAILED SPECIFICATION SHEET

BOLT, MACHINE – DOUBLE HEXAGON EXTENDED WASHER HEAD, AMS 5616, .250-2B UNJF-3A

INACTIVE FOR NEW DESIGN AFTER 18 NOVEMBER 1999.

This specification sheet is approved for all Departments and Agencies of the Department of Defense.

The requirements for acquiring the described herein shall consist of this specification sheet and procurement specification SAE AS7470.

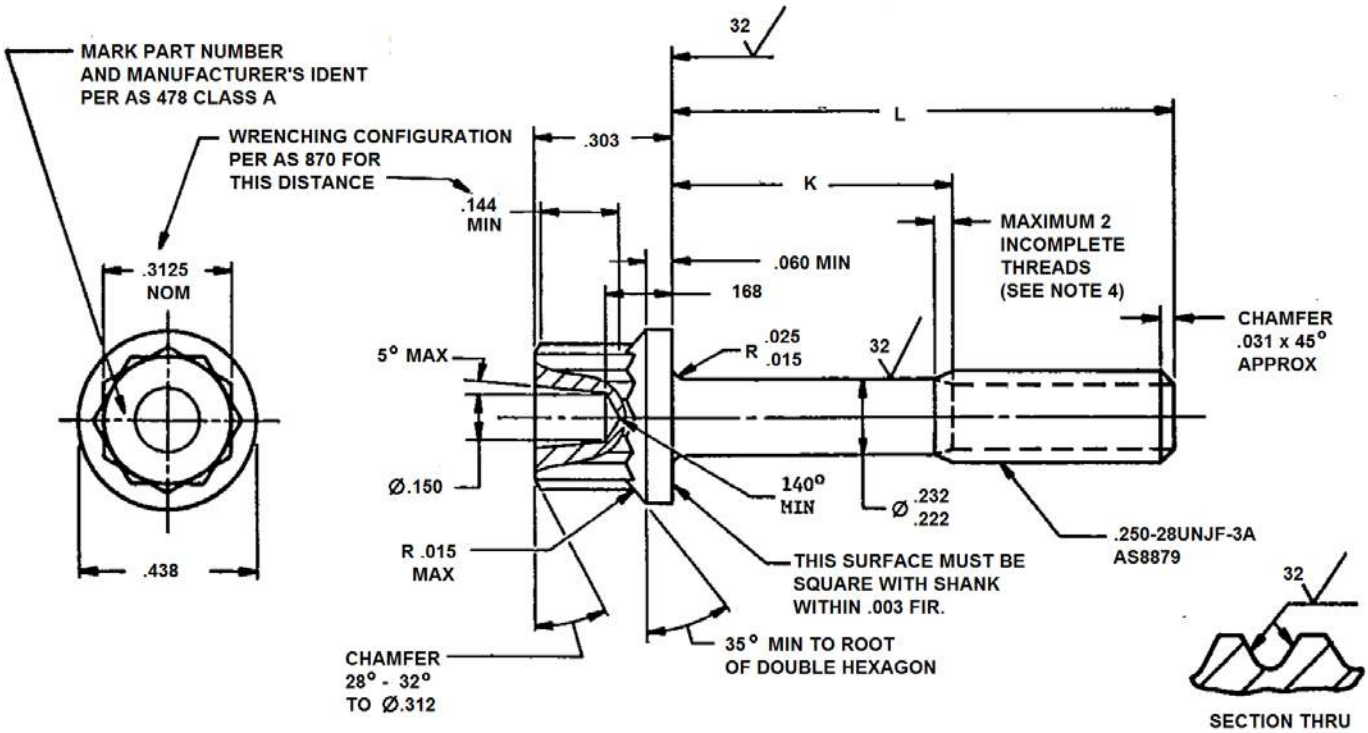


FIGURE 1. BOLT, MACHINE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions.

PART NUMBER	L	K	APPROX. WEIGHT LB/100
MS9886-04	.375	.079- .099	1.29
MS9886-05	.438	.079- .099	1.36
MS9886-06	.500	.079- .099	1.44
MS9886-07	.562	.079- .099	1.52
MS9886-08	.625	.079- .099	1.59
MS9886-09	.688	.079- .099	1.66
MS9886-10	.750	.079- .099	1.73
MS9886-11	.812	.079- .099	1.80
MS9886-12	.875	.079- .125	1.87
MS9886-13	.938	.128- .188	1.94
MS9886-14	1.000	.190- .250	2.01
MS9886-15	1.062	.251- .312	2.08
MS9886-16	1.125	.315- .375	2.15
MS9886-17	1.188	.378- .438	2.22
MS9886-18	1.125	.440- .500	2.30
MS9886-19	1.312	.502- .562	2.36
MS9886-20	1.375	.565- .625	2.44
MS9886-21	1.438	.628- .688	2.52
MS9886-22	1.500	.690- .750	2.59
MS9886-23	1.562	.752- .812	2.66
MS9886-24	1.625	.815- .875	2.73
MS9886-25	1.688	.878- .938	2.80
MS9886-26	1.750	.940-1.000	2.87
MS9886-27	1.812	1.002-1.062	2.94
MS9886-28	1.875	1.065-1.125	3.01
MS9886-29	1.938	1.128-1.188	3.08
MS9886-30	2.000	1.190-1.250	3.15
MS9886-31	2.125	1.315-1.375	3.30
MS9886-32	2.250	1.440-1.500	3.44
MS9886-33	2.375	1.565-1.625	3.59
MS9886-34	2.500	1.690-1.750	3.73
MS9886-35	2.625	1.815-1.875	3.88
MS9886-36	2.750	1.940-2.000	4.01
MS9886-37	2.875	2.065-2.125	4.17
MS9886-38	3.000	2.190-2.250	4.31
MS9886-39	3.125	2.315-2.375	4.45
MS9886-40	3.250	2.440-2.500	4.59
MS9886-41	3.375	2.565-2.625	4.74
MS9886-42	3.500	2.690-2.750	4.87
MS9886-43	3.625	2.815-2.875	5.01
MS9886-44	3.750	2.940-3.000	5.14
MS9886-45	3.875	3.065-3.125	5.31
MS9886-46	4.000	3.190-3.250	5.45
MS9886-47	4.125	3.315-3.375	5.58
MS9886-48	4.250	3.440-3.500	5.73
MS9886-49	4.375	3.565-3.625	5.88
MS9886-50	4.500	3.690-3.750	6.03
MS9886-51	4.675	3.815-3.875	6.16
MS9886-52	4.750	3.940-4.000	6.31
MS9886-53	4.875	4.065-4.125	6.46
MS9886-54	5.000	4.190-4.250	6.60
MS9886-55	5.125	4.315-4.375	6.74
MS9886-56	5.250	4.440-4.500	6.89
MS9886-57	5.375	4.565-4.625	7.03
MS9886-58	5.500	4.690-4.750	7.16
MS9886-59	5.675	4.815-4.875	7.31
MS9886-60	5.750	4.940-5.000	7.46
MS9886-61	5.875	5.065-5.125	7.60
MS9886-62	6.000	5.190-5.250	7.75

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Shank shall be straight within .003 per inch of bolt length.
2. The concentricity of thread PD in relation to the shank shall be within .006 FIR.
3. The concentricity of the shank in relation to the washer face diameter and double hexagon OD shall be within .007 FIR.
4. Incomplete threads not to enter fillet.
5. Material: Corrosion resistant steel SAE AMS5616.
6. Procurement Specification: SAE AS7470 except head shall be upset.
7. Head to shank fillet shall be cold rolled after heat treatment to remove all visual evidence of grinding or tool marks.
8. Hardness: Rockwell C32-38.
9. Surface Texture: ASME B46.1. Unless otherwise specified, surfaces to be 125 microinches except upset head.
10. Magnet particle inspection per ASTM E1444/E1444M.
11. Break sharp edges .003-.015 unless otherwise specified.
12. Dimensions in inches. Unless otherwise specified, tolerances: linear dimensions ± .010, angular dimensions ± 5º.
13. Do not use unassigned part numbers.
14. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – AV
Navy – AS
Air Force – 99

Preparing Activity:
DLA - IS

(Project 5306-2013-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.