METRIC
MIL-V-24695/1A(SH)
23 December 1991
SUPERSEDING
MIL-V-24695/1(SH)
28 October 1987

MILITARY SPECIFICATION SHEET

VALVE, VENT AND TEST
HYDRAULIC SERVICE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and, is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-V-24695.

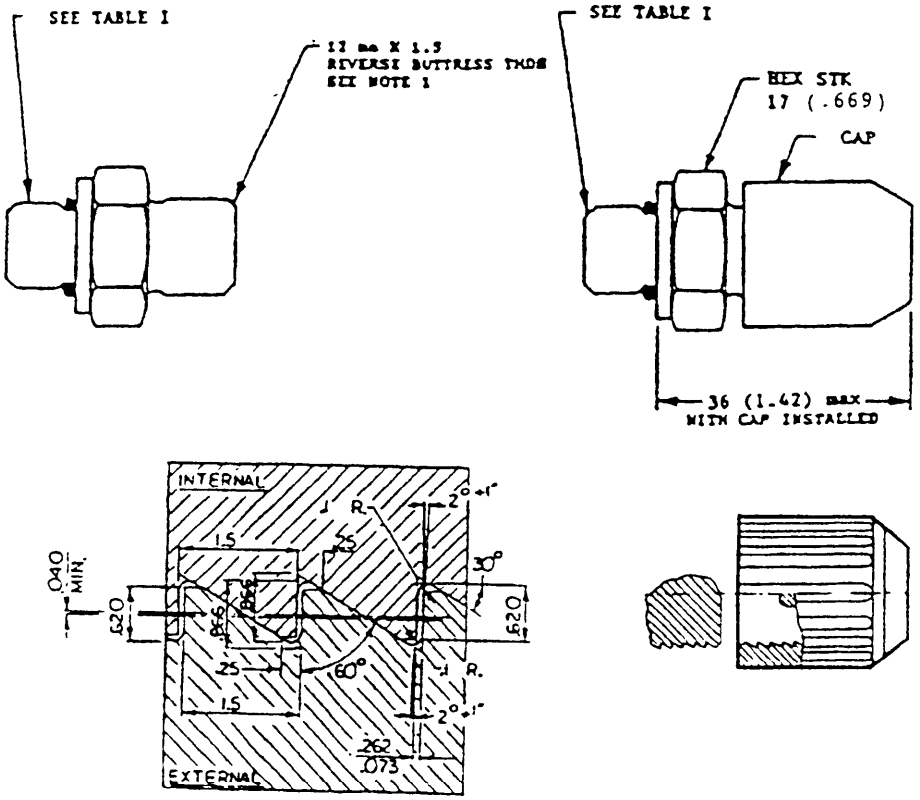

FIGURE 1. Vent and test valve configuration.

AMSC N/A FSC 4810

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

NOTES:

1. Reverse (compression) buttress threads shall be as specified herein and as shown on figure 1.

   Valve thread:

(external)	Major dia:	12.265 - 12.375
	Pitch dia:	11.725 - 11.835
	Minor dia:	11.025 - 11.135

   Cap thread:

(internal)	Major dia:	12.505 - 12.715
	Pitch dia:	11.875 - 12.025
	Minor dia:	11.375 - 11.485

2. Dimensions in millimeters and inches.

3. Tolerances plus or minus 0.2 mm (0.008 inch) except as noted.

4. Surface roughness shall not exceed 3.2 micrometres in accordance with ANSI B46 1. Remove all burrs and break sharp edges.

5. Material shall be in accordance with the general specification.

6. Install vent valve fitting into port using torque wrench. Torque valve to 22-27 Newton-Meters (198-243 inch-pounds).

REQUIREMENTS:

1. Valve shall have a protective cap with secondary sealing provisions that withstands pressure equal to the proof pressure rating of the valve. The protective cap shall include a security chain or equivalent to prevent loss of the cap.

2. Fluid openings shall be sealed before packaging by the use of caps or plugs in accordance with MIL-C-5501.

3. Part number: The part number shall consist of the basic number of this specification sheet plus a dash number indicating end fitting.

   Example:

   M24695/1-1 - Valve with .438-20 UNF thread fitting per ANSI B1.1.
   M24695/1-2 - Valve with M10X1.0 MM thread fitting per SAE MA2039-05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

TABLE I. Vent and test valve identification of part number.

Part number	Fitting thread size	Inlet thread	Seal	Comment
M24695/1-1	0.438-20 UNF	ANSI B1.1	M83248/2-904	For SAE J1926-4 Port.
M24695/1-2	M10 x 1.0MM	SAE MA2039-05	SAE MA3445A0080	For SAE MA2012-05 Port.

Preparing activity:
Navy - SH
(Project 4810-N083-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.