METRIC
MIL-DTL-24695/1B(SH)
25 September 2012
SUPERSEDING
MIL-V-24695/1A(SH)
23 December 1991

DETAIL SPECIFICATION SHEET

VALVE, VENT AND TEST
HYDRAULIC SERVICE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24695. Vent and test valve configuration is provided on figure 1.

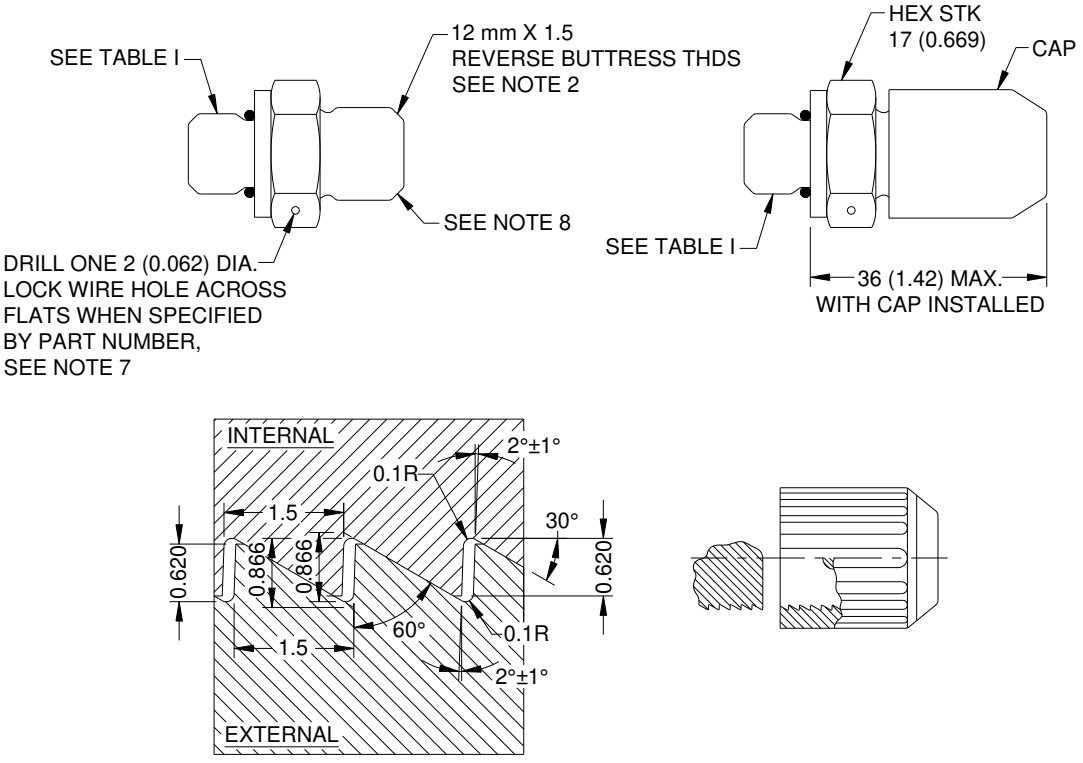


FIGURE 1. Vent and test valve configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions in millimeters (and inches) except as noted (see note 7).
2. Reverse (compression) buttress threads shall be as specified herein and as shown on figure 1.

   Valve thread:

   (external) Major dia.: 12.265 - 12.375

   Pitch dia.: 11.725 - 11.835

   Minor dia.: 11.025 - 11.135

   Cap thread:

   (internal) Major dia.: 12.605 - 12.715

   Pitch dia.: 11.915 - 12.025

   Minor dia.: 11.375 - 11.485
3. Tolerances ±0.2 millimeter (0.008 inch) except as noted.
4. Surface roughness shall not exceed 3.2 micrometers in accordance with ASME B46.1. Remove all burrs and break sharp edges.
5. Material shall be in accordance with MIL-DTL-24695 (see requirement 3 below).
6. Install vent valve fitting into port using torque wrench. Torque valve to 22-27 Newton meters (198-243 inch-pounds).
7. Provide hole for lock wire or safety cable based on whether this requirement is specified by the component part number (see requirement 3 below). Specified hole diameter dimensions suit standard drill sizes.
8. Internal seal interface dimensional requirement shall be in accordance with MIL-DTL-24695/3.

FIGURE 1. Vent and test valve configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Valve shall have a protective cap with secondary sealing provisions that withstands pressure equal to the proof pressure rating of the valve. The protective cap shall include a security chain or equivalent to prevent loss of the cap.

2. Fluid openings shall be sealed before packaging by the use of caps or plugs in accordance with NAS847.

3. Part number: As specified in table I, the part number shall consist of the basic number of this specification sheet plus a dash number indicating end fitting, "A" for NiCu alloy or "C" for CRES pressure containing parts, and "L" if lock wire hole is required.

Example:

M24695/1-1-C-L - Valve with 0.438-20 UNF thread fitting in accordance with ANSI/ASME B1.1, CRES pressure containing parts, and lock wire hole.

M24695/1-2-A - Valve with M10 x 1.0 thread fitting in accordance with SAE MA2039-05, NiCu alloy pressure containing parts, and without lock wire hole.

TABLE I. Vent and test valve identification of part number.

Part number	Fitting thread size	Inlet thread	Seal	Comment
M24695/1-1	0.438-20 UNF	ANSI/ASME B1.1	SAE AS3581-904	For SAE J1926-1 Port
M24695/1-2	M10 x 1.0	SAE MA2039-05	SAE MA3445A0080	For SAE MA2012-05 Port

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing Activity:
Navy – SH
(Project 4810-2012-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.