METRIC

MIL-V-24695/2A(SH)
23 December 1991

SUPERSEDING
MIL-V-24695/2(SH)
28 October 1987

MILITARY SPECIFICATION SHEET

VENT AND TEST VALVE HOSE ASSEMBLY HYDRAULIC SERVICE

This specification is approved is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following Specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-V-24695.

AMSC N/A FSC 4810

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

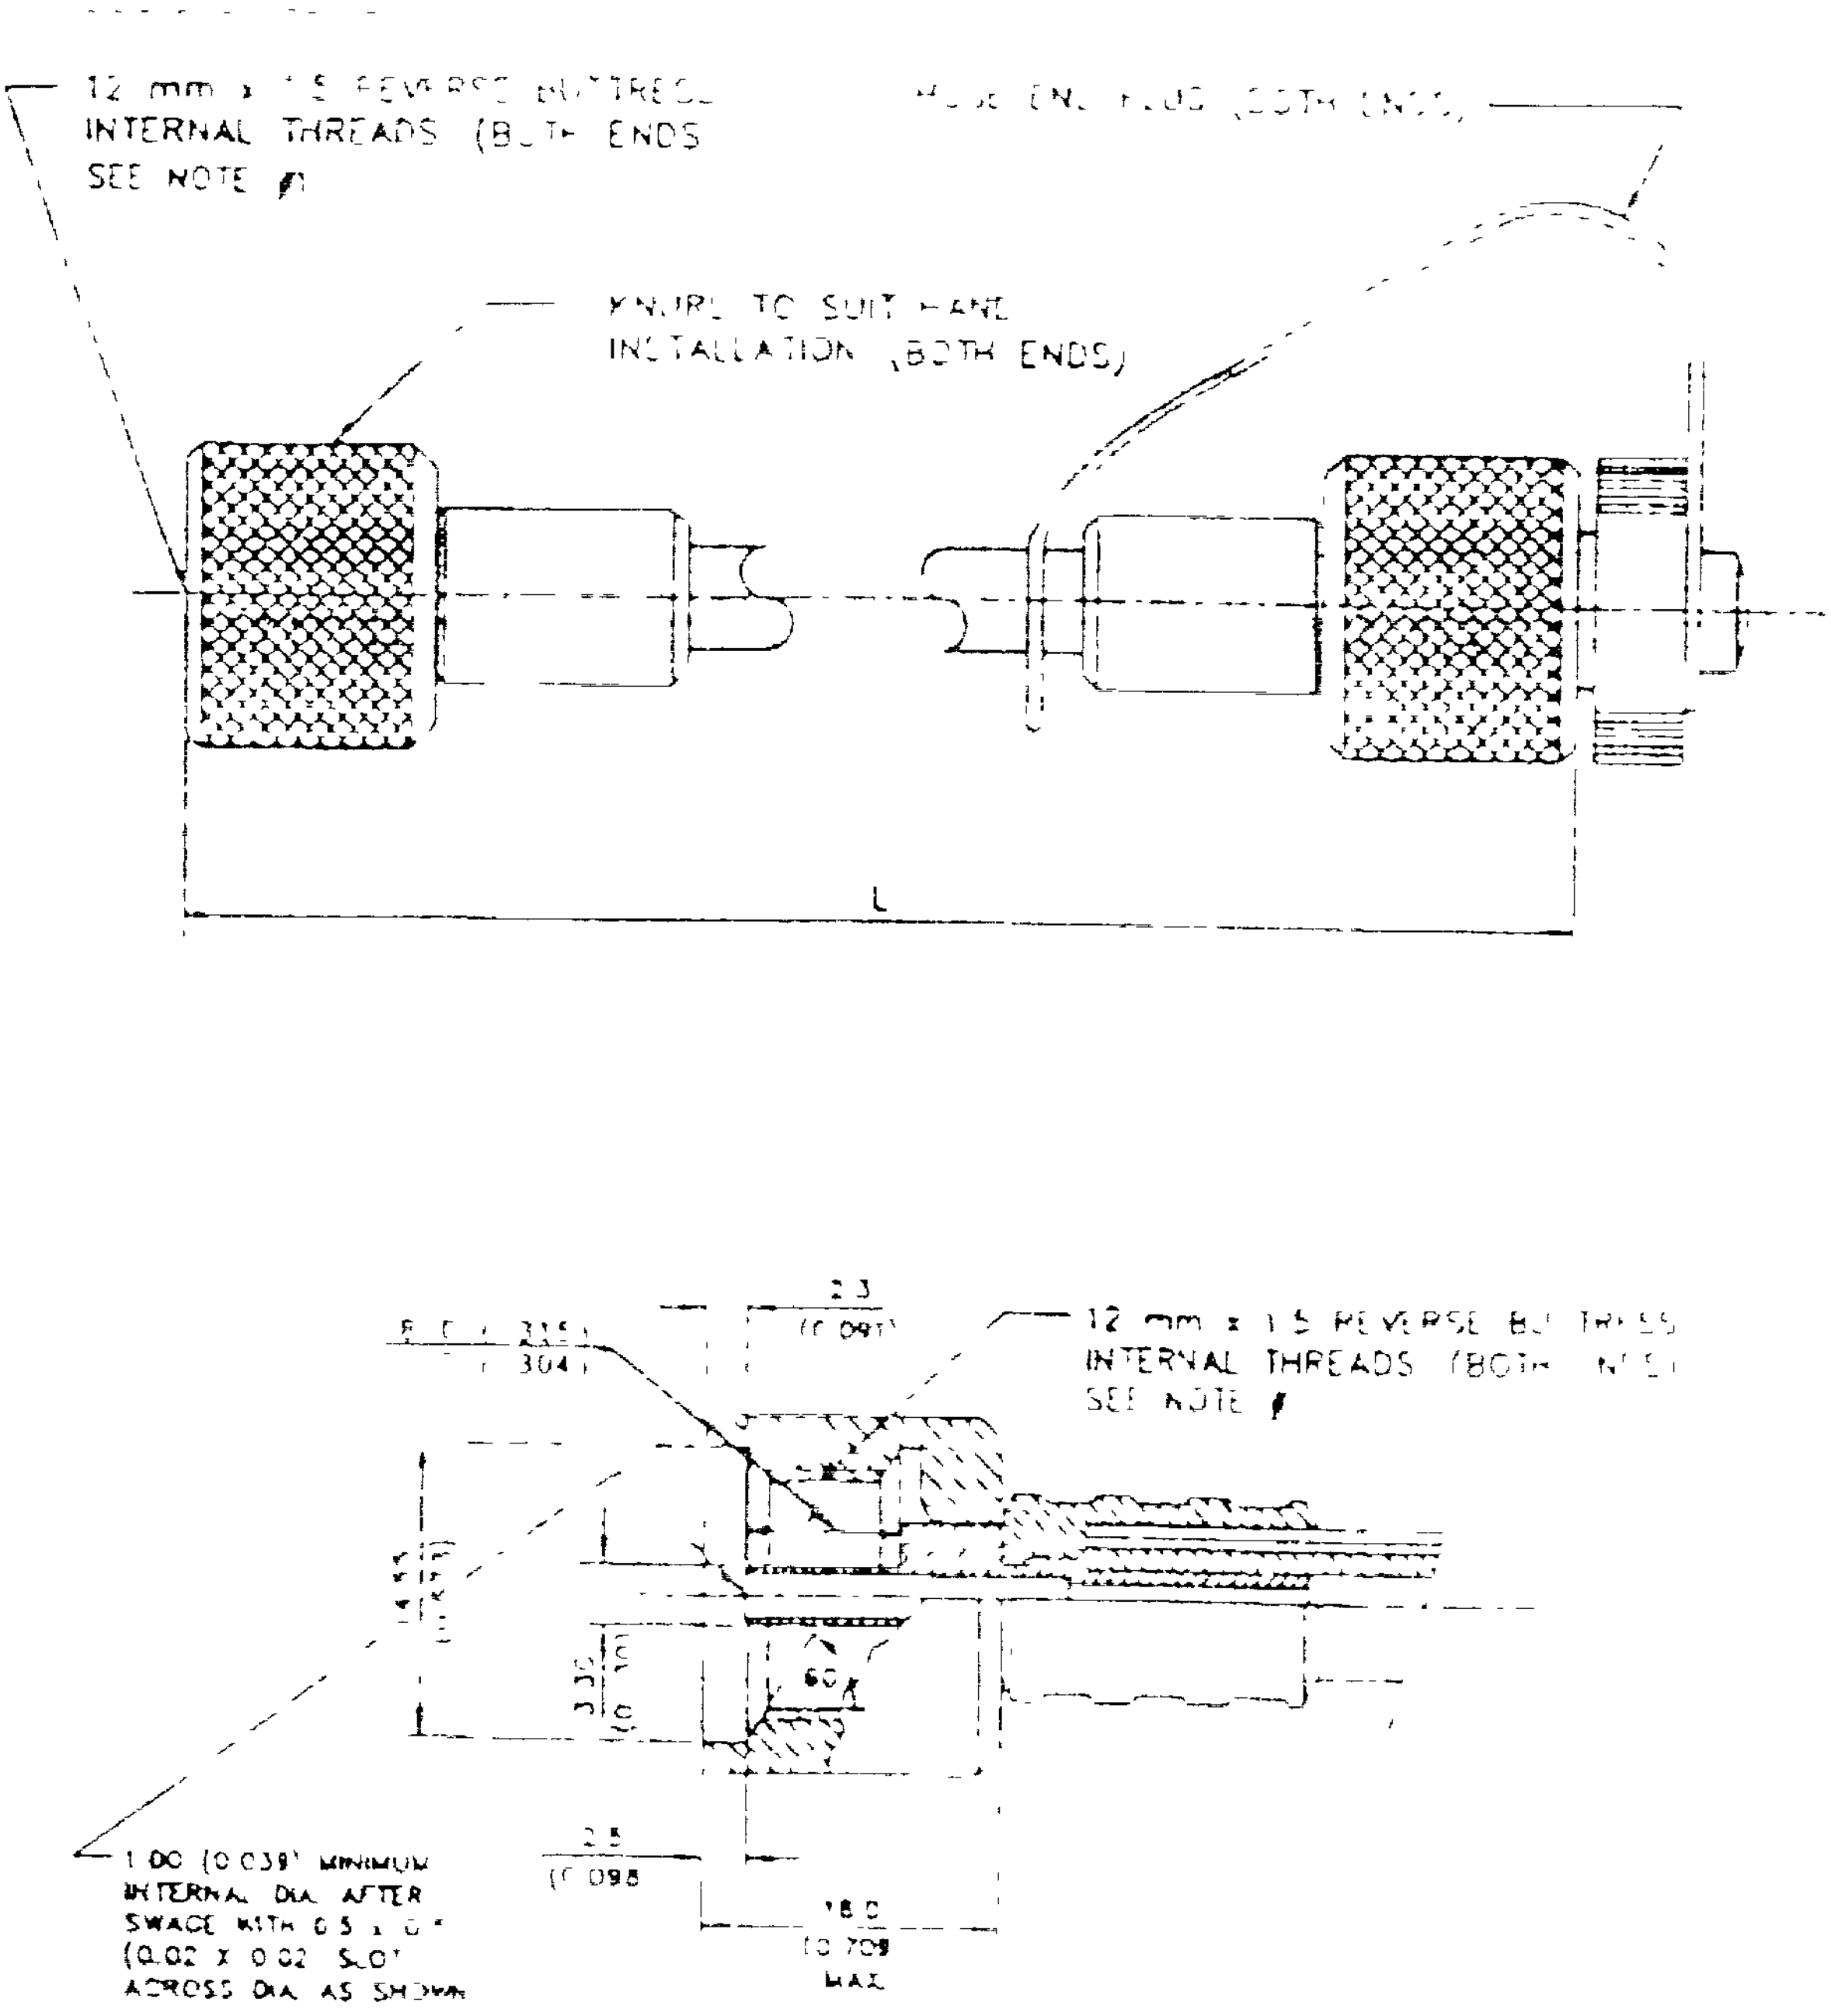
12 mm x 1.5 REVERSE BUTTRESS INTERNAL THREADS (BOTH ENDS) SEE NOTE
HOSE END PLUG (BOTH ENDS)
KNURL TO SUIT HAND INSTALLATION (BOTH ENDS)
L
2.3 (0.091)
8.0 (0.315) (0.304)
12 mm x 1.5 REVERSE BUTTRESS INTERNAL THREADS (BOTH ENDS) SEE NOTE
60°
2.5 (0.098)
18.0 (0.709) MAX
1.00 (0.039) MINIMUM INTERNAL DIA. AFTER SWAGE WITH 0.5 x 0.5 (0.02 x 0.02) SLOT ACROSS DIA. AS SHOWN

FIGURE 1. Detail of vent valve fitting

NOTES

1 Reverse (compression) buttress threads shall be as specified herein and as shown on figure 1 of MIL-V-24695/1

Hose End Fitting thread (internal)	Major dia:	12.505 - 12.715
	Pitch dia:	11.875 - 12.025
	Mior dia:	11.375 - 11.485

2. Dimensions in millimeters and inches.

3. Materials shall be in accordancce with the general specification.

4 Tolerances plus or minus 0.2 mm (0.008 inch except as noted.

5 Hose length tolerance: plus or minus 12 mm.

Dash No	L	
	mm Required	FT Ref Only
-01	305	1
-03	915	3
-06	1830	6
-10	3050	10

REQUIREMENTS

1. Torque required to connect the hose to the vent and test valve shall not exceed 2.0 Newton-Meters (18 inch/pounds with 310 bars (4,500 lb/in^2) pressure on the valve.

2. Hose ends shall be protected by plugs to prevent thread damage and dirt infiltration in accordance with MIL-C-5501.

3. Part number: The part number shall consist of the basic number of this specification sheet plus A dash number indicating hose length.

Example

M24695/2-03 - 915 mm (36 inch) hose assembly

Preparing activity:
Navy - SH
(Project 4810-N083-02)