METRIC

MIL-DTL-24695/2B(SH)
25 September 2012

SUPERSEDING
MIL-V-24695/2A(SH)
23 December 1991

DETAIL SPECIFICATION SHEET

VENT AND TEST VALVE HOSE ASSEMBLY HYDRAULIC SERVICE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24695. The detail of vent and test valve hose assembly end fitting is provided on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

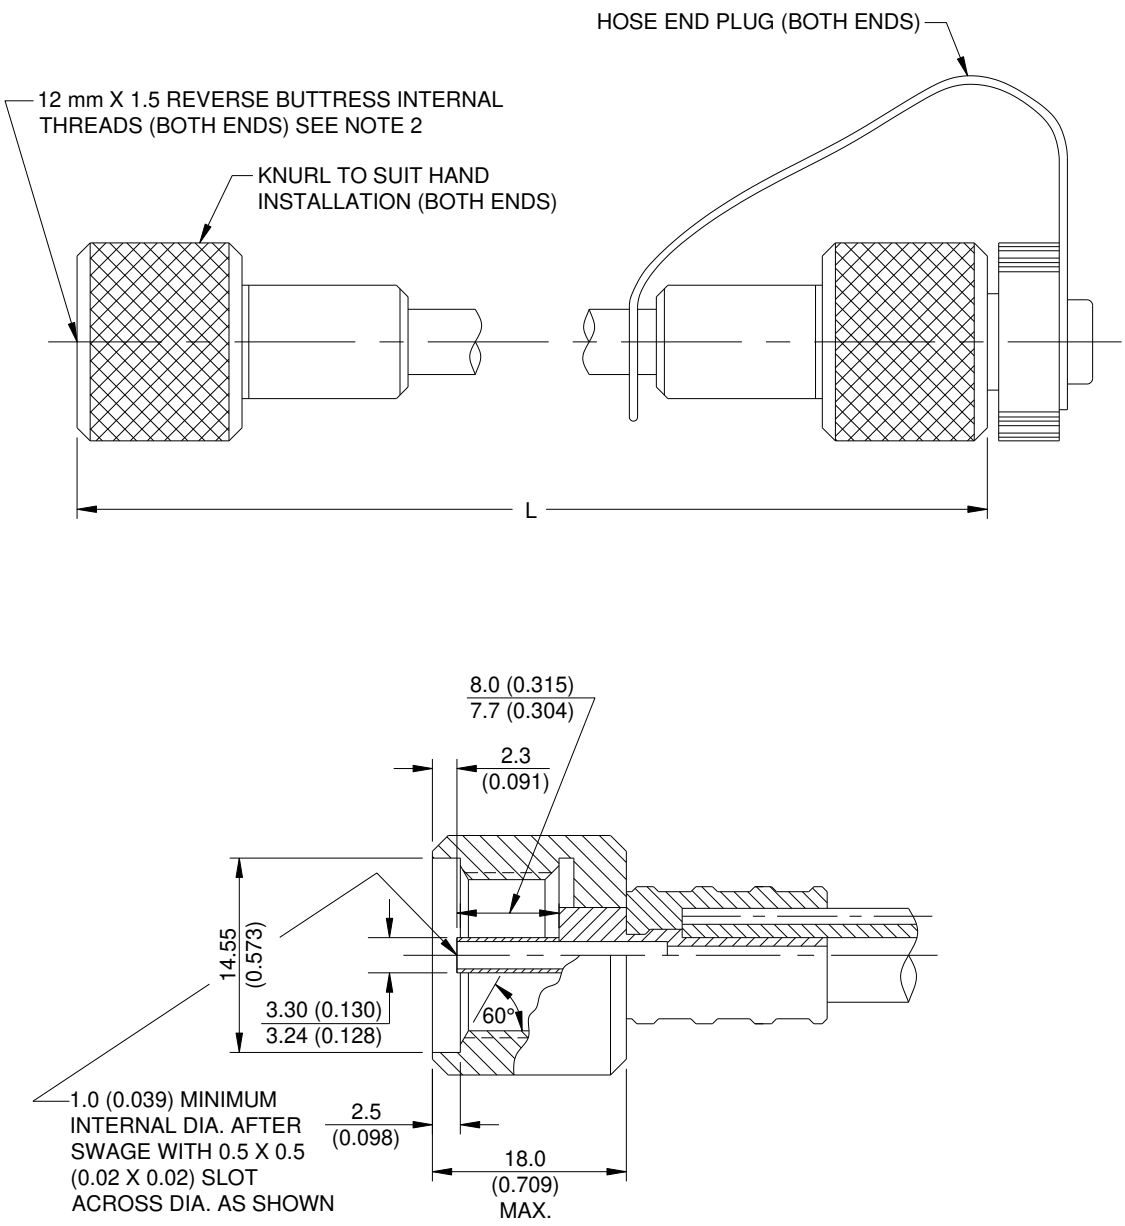


FIGURE 1. Detail of vent and test valve hose assembly end fitting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions in millimeters (and inches).
2. Reverse (compression) buttress threads shall be as specified herein and as shown on the vent and test valve configuration of MIL-DTL-24695/1 for the cap or internal threads.

   Hose End

   Fitting thread: Major dia.: 12.605 - 12.715

   (internal) Pitch dia.: 11.915 - 12.025

   Minor dia.: 11.375 - 11.485
3. Materials shall be in accordance with MIL-DTL-24695 (see requirement 3 below).
4. Tolerances ±0.2 millimeter (0.008 inch) except as noted.
5. Hose length tolerance: ±12 millimeters (0.47 inch).

FIGURE 1. Detail of vent and test valve hose assembly end fitting – Continued.

REQUIREMENTS:

1. Torque required to connect the hose assembly to the vent and test valve shall be in accordance with MIL-DTL-24695.

2. Hose ends shall be protected by plugs to prevent thread damage and dirt infiltration in accordance with NAS847.

3. Part number: The part number shall consist of the basic number of this specification sheet plus a dash number indicating hose length (see table I) and "A" for NiCu alloy or "C" for CRES pressure containing parts.

Example:

M24695/2-03-C - 915 millimeter (3 feet) hose assembly with CRES pressure containing parts.

M24695/2-10-A - 3050 millimeter (10 feet) hose assembly with NiCu alloy pressure containing parts.

TABLE I. Dash numbers indicating hose length.

Dash no.	L	
	millimeters required	feet reference only
-01	305	1
-03	915	3
-06	1830	6
-10	3050	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing Activity:
Navy – SH
(Project 4810-2012-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.