METRIC
MIL-A-24695/3(SH)
23 December 1991

MILITARY SPECIFICATION SHEET

ADAPTER, VENT AND TEST
VALVE HOSE ASSEMBLY

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-V-24695.

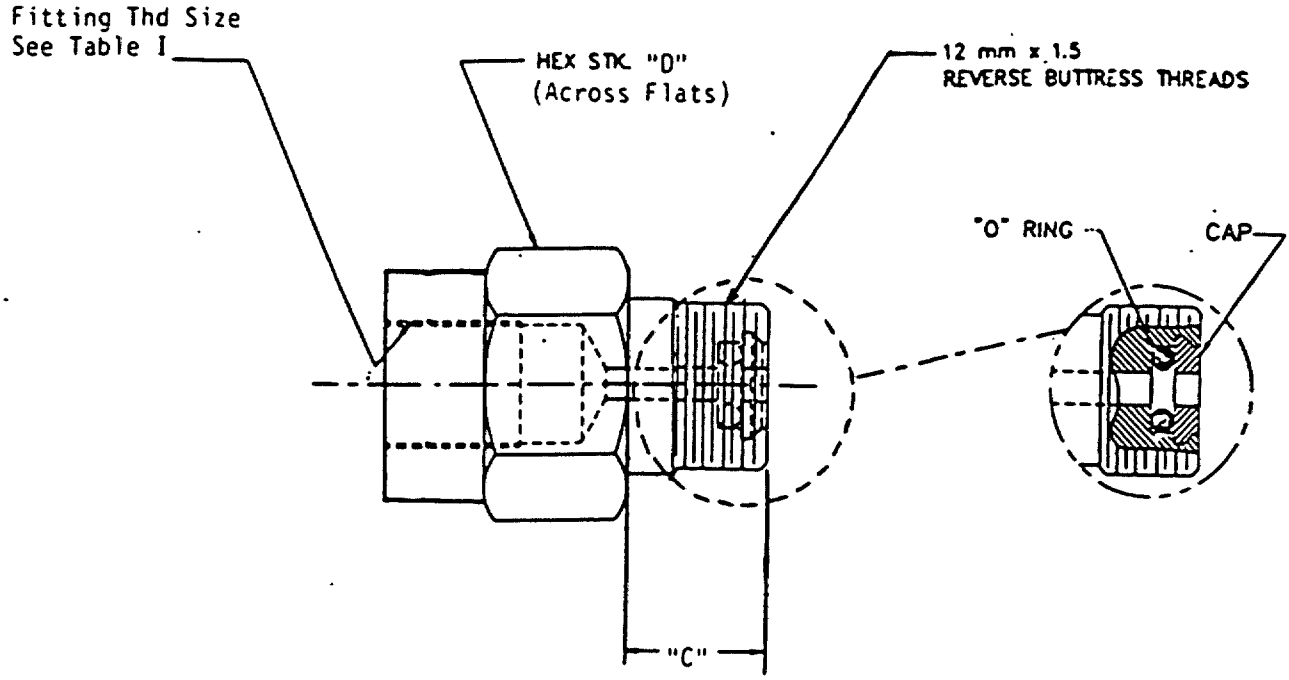


FIGURE 1. Adapter.

AMSC N/A
FSC 4810
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

NOTES:

1. Reverse (compression) buttress threads shall be as specified herein and as shown on figure 1 of MIL-V-24695/1.

   Adapter thread:
   (external) Major dia: 12.265 - 12.375
   Pitch dia: 11.725 - 11.835
   Minor dia: 11.025 - 11.135

2. Dimensions are in millimeters and inches.

3. Tolerances plus or minus 0.2 mm (0.008 inch) except as noted.

4. Surface roughness shall not exceed 3.2 micrometers in accordance with ANSI B46.1. Remove all burrs and break sharp edges.

5. Material shall be in accordance with the general specification.

REQUIREMENTS:

1. Fluid openings shall be sealed before packaging by the use of caps or plugs in accordance with MIL-C-5501.

2. Adapter shall be equipped with locking elastomer ring to dampen shock and vibration that may loosen the adapter.

3. Part number: The part number shall consist of the basic number of this specification sheet plus a dash number from table I indicating end fitting.

Example:

M24695/3-1 - Adapter with 0.438-20 UNF Thread Fitting per ANSI B1.1.

TABLE I.

STD Military part number	Fitting thread size	Specification ID	"C"		"D"	
			mm	(in)	mm	(in)
M24695/3-1	0.438-20 UNF (in)	ANSI B1.1	12	(0.472)	19	(0.748)
M24695/3-2	0.250-18 NPT (G)	ANSI B2.1	12	(0.472)	19	(0.748)
M24695/3-3	G-1/4	ISO-228	12	(0.472)	19	(0.748)
M24695/3-4	0.500-14 NPT (G)	ANSI B2.1	12	(0.472)	27	(1.068)

Preparing activity:
Navy - SH
(Project 4810-N083-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.