METRIC

MIL-V-24695/3A(SH)
29 December 1994
SUPERSEDING
MIL-V-24695/3(SH)
23 December 1991

MILITARY SPECIFICATION SHEET

VENT AND TEST,
HOSE ASSEMBLY ADAPTER

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the Adapter described herein shall consist of this specification sheet and the latest issue of MIL-V-24695(SH).

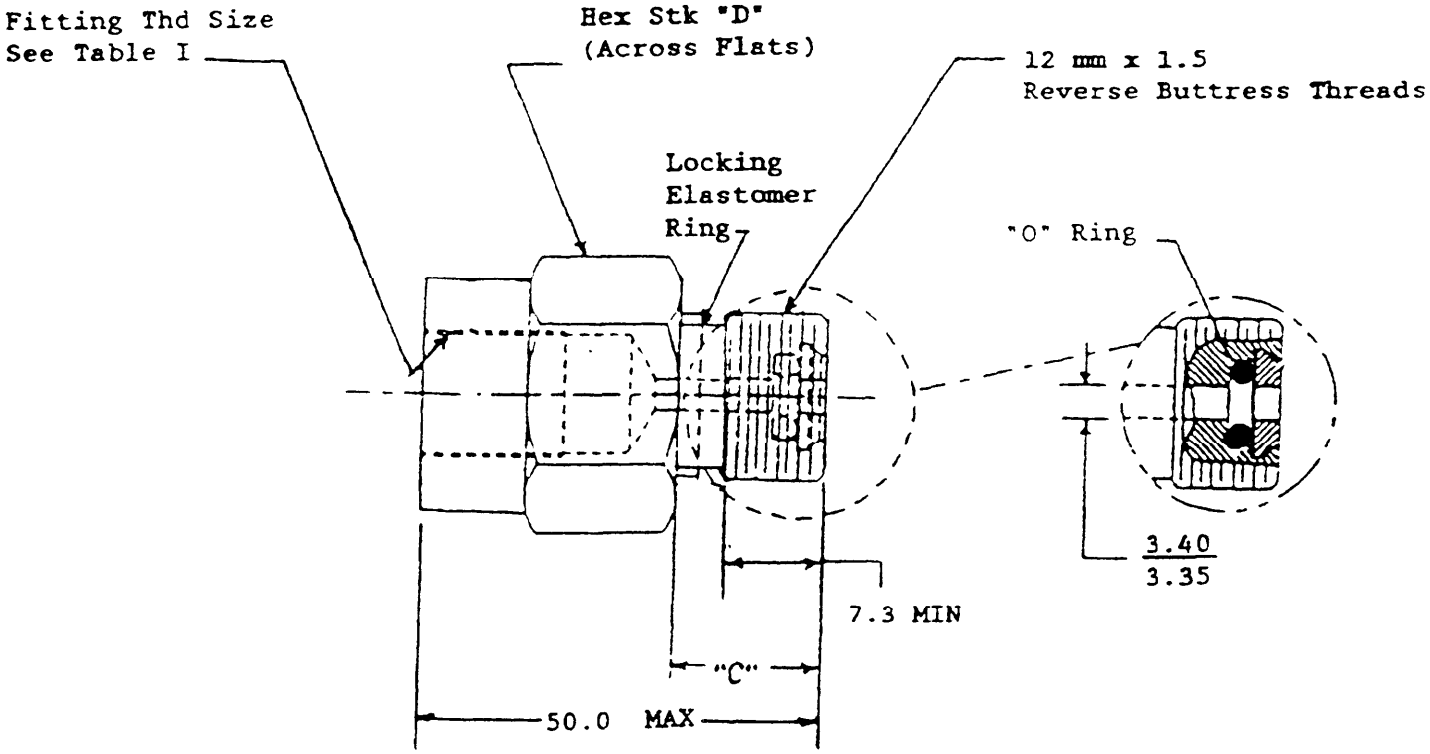

FIGURE 1. Adapter

AMSC N/A FSC 4810

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

NOTES:

1. Reverse (compression) buttress thread shall be as specified herein and as shown in figure 1 of MIL-V-24695/1.

Adapter thread: (external)	Major Dia:	12.265 - 12.375
	Pitch Dia:	11.725 - 11.835
	Minor Dia:	11.025 - 11.135

2. Dimensions are in millimeters.

3. Tolerances plus or minus 0.5 mm except as noted.

4. Remove burrs and break sharp edges.

5. Material shall be in accordance with the general specification.

REQUIREMENTS:

1. Fluid openings shall be sealed before packaging by the use of caps and plugs in accordance with MIL-C-5501.

2. Adapter shall have a locking elastomer ring inserted between the hex stock and reverse buttress threads to dampen shock and vibration.

3. Part Number: The part number shall consist of the basic number of this specification sheet followed by a dash number as specified in Table I, indicating end fitting.

EXAMPLE:

H24695/3-1 - Adapter with 0.438-20 UNF Thread Fitting per ANSI B1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.

TABLE I.

Part or Identifying Number (PIN)	Fitting thread size	Specification ID	"C"	"D"	Fitting thread comments
			mm	mm	
M24695/3-1	0.438-20 UNF	ANSI B1.1	12	19	Machine per SAE J1926-4 to accept SAE-J514 fitting
M24695/3-2	0.250-18 NPT	ANSI B2.1	12	19	.250-18NPT Minimum Thread Depth : 9.6
M24695/3-3	G-1/4	ISO-228	12	19	ISO-228 Minimum thread Depth : 10.0
M24695/3-4	0.500-14 NPT	ANSI B2.1	12	27	.500-14NPT Minimum thread Depth : 11.2

Preparing Activity:
Navy - SH
(Project 4810-N110)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:03Z
Check the source to verify that this is the current version before use.