INCH-POUND
MIL-F-24704/1(SH)
30 November 1988

MILITARY SPECIFICATION SHEET

FLANGES, FOUR BOLT SQUARE, SOCKET WELD FOR HYDRAULIC SYSTEMS


This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the flange described herein shall consist of this specification and the latest issue of MIL-F-24704(SH).

SCOPE

Scope. This specification sheet covers the requirements for four bolt square socket weld flanges for use in 3000 pounds per square inch (lb/in^2) hydraulic systems.

Classification. Socket weld flanges shall be designated by standard part numbers as identified below:

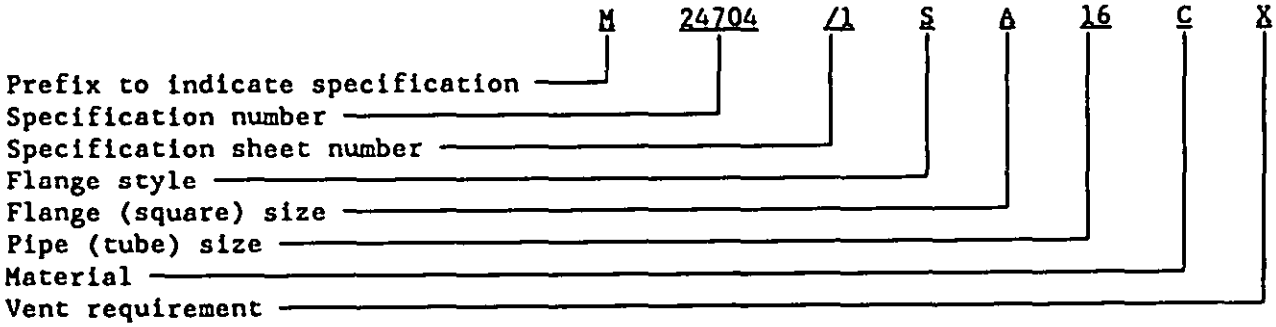

AMSC N/A FSC 4810

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil - Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Flange style. The flange style designation letter indicates whether a straight or angle flange and whether for tubing or nominal pipe size (nps) piping as indicated below:

S = Straight flange for nps piping (see figure 1)
L = Right angle flange for nps piping (see figure 2)
T = Straight flange for outside diameter (od) tubing (see figure 3)
R = Right angle flange for od tubing (see figure 4)

Flange (square) size. The square size of the flange shall be designated by a letter in accordance with the following list (see figures 1, 2, 3 and 4 for listing of compatible flange and pipe (tube) sizes):

A = 1.50 inches square
B = 1.75
C = 2.00
D = 2.25
E = 2.75
F = 3.50
G = 4.25

Pipe (tube) size. The pipe or tubing size shall be designated as a two digit number in accordance with the following list:


Size	Pipe (nps)	Tube (od)
01	1/8 (0.405 od)	---
02	1/4 (.540 od)	0.250
03	3/8 (.675 od)	.375
04	1/2 (.840 od)	.500
06	3/4 (1.050 od)	.750
08	1 (1.315 od)	1.000
10	1-1/4 (1.660 od)	1.250
12	1-1/2 (1.900 od)	1.500
16	2 (2.375 od)	2.000

Material. The flange material shall be designated by a letter as indicated below:

C = Corrosion resistant steel (CRES), class 304 or 316 in accordance with ASTM A 276, ASTM A 473 or QQ-S-763
L = Corrosion resistant steel (CRES), class 304L or 316L in accordance with ASTM A 276, ASTM A 473 or QQ-S-763
N = Nickel copper alloy in accordance with QQ-N-281, class A or ASTM B 127 (UNS N04400 only)

Vent requirement. The vent requirement shall be designated by a letter X Y or Z as indicated on figures 5 and 6. For flanges without a vent the letter W shall be used. Machining for the vent port shall be as shown on the applicable figures.

Source: https://assist.dla.mil -- Downloaded: 20260-20T01:08Z
Check the source to verify that this is the current version before use.

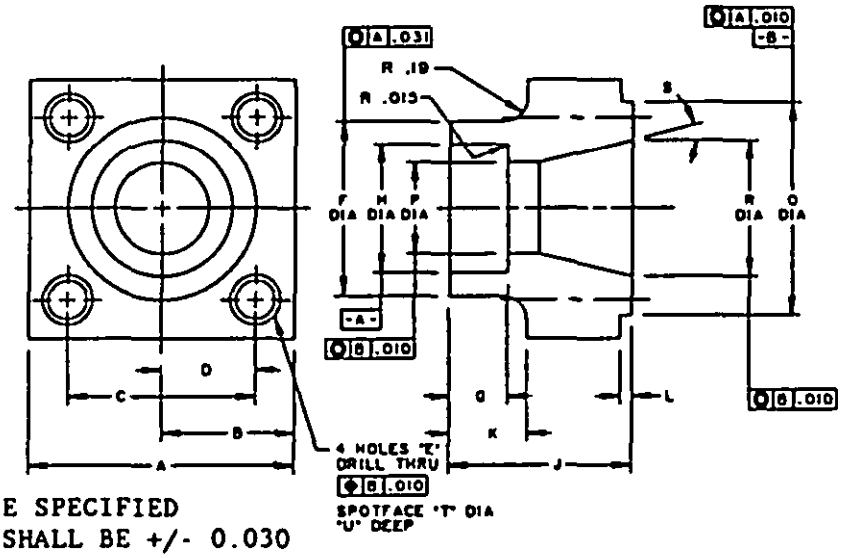

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030

PART NUMBER --- M 24704/1 S## ** xx
** --- SELECTED FROM BELOW

##	**	FLANGE SIZE	PIPE SIZE N.P.S.	A SQ	B	C SQ	D	E	F	G +.031 -.000	H +.005 -.000
A	01	1.500	0.125	1.500	0.750	0.938	0.469	0.281	0.812	0.375	0.425
B	01	1.750	0.125	1.750	0.875	1.125	0.562	0.344	0.812	0.375	0.425
B	02	1.750	0.250	1.750	0.875	1.125	0.562	0.344	0.969	0.375	0.560
C	02	2.000	0.250	2.000	1.000	1.312	0.656	0.406	0.969	0.375	0.560
C	03	2.000	0.375	2.000	1.000	1.312	0.656	0.406	1.125	0.375	0.695
D	02	2.250	0.250	2.250	1.125	1.500	0.750	0.469	0.969	0.375	0.560
D	03	2.250	0.375	2.250	1.125	1.500	0.750	0.469	1.125	0.375	0.695
D	04	2.250	0.500	2.250	1.125	1.500	0.750	0.469	1.281	0.375	0.860
E	02	2.750	0.250	2.750	1.375	1.875	0.938	0.469	0.969	0.375	0.560
E	03	2.750	0.375	2.750	1.375	1.875	0.938	0.469	1.125	0.375	0.695
E	04	2.750	0.500	2.750	1.375	1.875	0.938	0.469	1.281	0.375	0.860
E	06	2.750	0.750	2.750	1.375	1.875	0.938	0.469	1.531	0.500	1.070
E	08	2.750	1.000	2.750	1.375	1.875	0.938	0.469	1.875	0.500	1.335
F	02	3.500	0.250	3.500	1.750	2.500	1.250	0.531	0.969	0.375	0.560
F	03	3.500	0.375	3.500	1.750	2.500	1.250	0.531	1.125	0.375	0.695
F	04	3.500	0.500	3.500	1.750	2.500	1.250	0.531	1.281	0.375	0.860
F	06	3.500	0.750	3.500	1.750	2.500	1.250	0.531	1.531	0.500	1.070
F	08	3.500	0.750	3.500	1.750	2.500	1.250	0.531	1.875	0.500	1.335
F	10	3.500	1.250	3.500	1.750	2.500	1.250	0.531	2.250	0.500	1.680
F	12	3.500	1.500	3.500	1.750	2.500	1.250	0.531	2.563	0.500	1.920
G	16	4.250	2.000	4.250	2.125	3.062	1.531	0.656	3.188	0.625	2.411

SH 13203051

FIGURE 1. Straight flange - pipe.

Source: https://assist.dla.mil -- Downloaded: 202610-20T01:08Z
Check the source to verify that this is the current version before use.

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030


PART NUMBER --- M 24704/1 S# ** xx
** --- SELECTED FROM BELOW

#	**	FLANGE SIZE	PIPE SIZE N.P.S.	J	K	L +.002 -.000	P +.010 -.000	Q +.000 -.002	R +.000 -.015	S DEG	T	U
A	01	1.500	0.125	1.313	0.781	0.062	0.215	0.487	----	----	0.469	0.031
B	01	1.750	0.125	1.313	0.781	0.062	0.215	0.687	----	----	0.562	0.031
B	02	1.750	0.250	1.313	0.781	0.062	0.302	0.687	0.375	15.0	0.562	0.031
C	02	2.000	0.250	1.313	0.781	0.062	0.302	0.999	0.625	15.0	0.688	0.031
C	03	2.000	0.375	1.313	0.781	0.062	0.423	0.999	0.625	15.0	0.688	0.031
D	02	2.250	0.250	1.594	0.781	0.062	0.302	1.187	0.813	22.5	0.750	0.031
D	03	2.250	0.375	1.594	0.781	0.062	0.423	1.187	0.813	15.0	0.750	0.031
D	04	2.250	0.500	1.594	0.781	0.062	0.622	1.187	0.813	15.0	0.750	0.031
E	02	2.750	0.250	1.656	0.781	0.125	0.302	1.437	1.000	22.5	0.750	0.031
E	03	2.750	0.375	1.656	0.781	0.125	0.423	1.437	1.000	15.0	0.750	0.031
E	04	2.750	0.500	1.656	0.781	0.125	0.622	1.437	1.000	15.0	0.750	0.031
E	06	2.750	0.750	1.781	0.906	0.125	0.824	1.437	1.000	15.0	0.750	0.031
E	08	2.750	1.000	1.781	0.906	0.125	0.957	1.437	1.000	15.0	0.750	0.031
F	02	3.500	0.250	2.000	0.781	0.125	0.302	2.124	1.500	30.0	0.938	0.031
F	03	3.500	0.375	2.000	0.781	0.125	0.423	2.124	1.500	22.5	0.938	0.031
F	04	3.500	0.500	2.000	0.781	0.125	0.622	2.124	1.500	22.5	0.938	0.031
F	06	3.500	0.750	2.125	0.906	0.125	0.824	2.124	1.500	22.5	0.938	0.031
F	08	3.500	1.000	2.125	0.906	0.125	0.957	2.124	1.500	15.0	0.938	0.031
F	10	3.500	1.250	2.250	0.906	0.125	1.278	2.124	1.500	5.0	0.938	0.281
F	12	3.500	1.500	2.250	0.906	0.125	1.500	2.124	----	----	0.938	0.281
G	16	4.250	2.000	2.594	0.096	0.125	1.689	2.374	1.750	----	1.062	0.500

SH 13203051

FIGURE 1. Straight flange - pipe. - Continued

Source: https://assist.dla.mil --Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

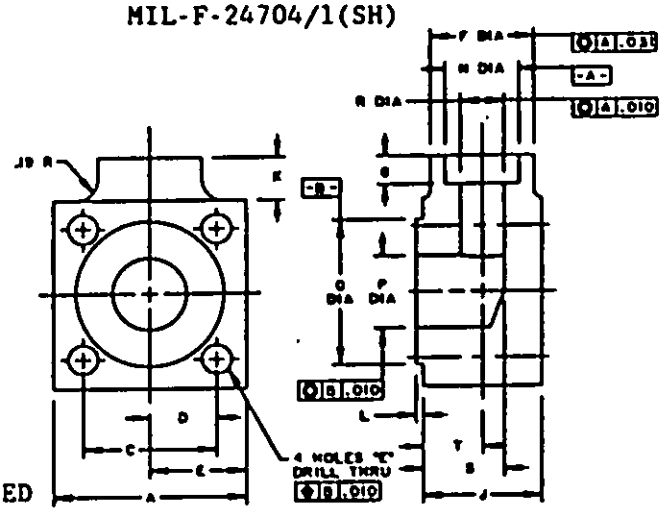

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030

PART NUMBER --- M 24704/1 L// ** xx
// ** --- SELECTED FROM BELOW

//	**	FLANGE SIZE	PIPE SIZE N.P.S.	A SQ	B	C SQ	D	E	F	G +.031 -.000	H +.005 -.000
B	01	1.750	0.125	1.750	0.875	1.125	0.562	0.344	0.969	0.375	0.425
B	02	1.750	0.250	1.750	0.875	1.125	0.562	0.344	0.969	0.375	0.560
C	02	2.000	0.250	2.000	1.000	1.312	0.656	0.406	0.969	0.375	0.560
C	03	2.000	0.375	2.000	1.000	1.312	0.656	0.406	1.125	0.375	0.695
C	04	2.000	0.500	2.000	1.000	1.312	0.656	0.406	1.281	0.375	0.860
D	02	2.250	0.250	2.250	1.125	1.500	0.750	0.469	0.969	0.375	0.560
D	03	2.250	0.375	2.250	1.125	1.500	0.750	0.469	1.125	0.375	0.695
D	04	2.250	0.500	2.250	1.125	1.500	0.750	0.469	1.281	0.375	0.860
E	02	2.750	0.250	2.750	1.375	1.875	0.938	0.469	0.969	0.375	0.560
E	03	2.750	0.375	2.750	1.375	1.875	0.938	0.469	1.125	0.375	0.695
E	04	2.750	0.500	2.750	1.375	1.875	0.938	0.469	1.281	0.375	0.860
E	06	2.750	0.750	2.750	1.375	1.875	0.938	0.469	1.531	0.500	1.070
E	08	2.750	1.000	2.750	1.375	1.875	0.938	0.469	1.875	0.500	1.335
F	02	3.500	0.250	3.500	1.750	2.500	1.250	0.531	0.969	0.375	0.560
F	03	3.500	0.375	3.500	1.750	2.500	1.250	0.531	1.125	0.375	0.695
F	04	3.500	0.500	3.500	1.750	2.500	1.250	0.531	1.281	0.375	0.860
F	06	3.500	0.750	3.500	1.750	2.500	1.250	0.531	1.531	0.500	1.070
F	08	3.500	1.000	3.500	1.750	2.500	1.250	0.531	1.875	0.500	1.335
F	10	3.500	1.250	3.500	1.750	2.500	1.250	0.531	2.250	0.500	1.680
F	12	3.500	1.500	3.500	1.750	2.500	1.250	0.531	2.563	0.500	1.920
G	16	4.250	2.000	4.250	2.125	3.062	1.531	0.656	3.375	0.625	2.411

SH 13203052

FIGURE 2. Right angle flange - pipe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030


PART NUMBER --- M 24704/1 L# ** xx
** --- SELECTED FROM BELOW

#	**	FLANGE SIZE	PIPE SIZE N.P.S.	J	K +.015 -.000	L +.002 -.000	P +.010 -.000	Q +.000 -.002	R +.010 -.000	S	T
B	01	1.750	0.125	1.188	0.750	0.062	0.375	0.687	0.215	0.781	0.594
B	02	1.750	0.250	1.188	0.750	0.062	0.375	0.687	0.302	0.781	0.594
C	02	2.000	0.250	1.188	0.750	0.062	0.625	0.999	0.302	0.781	0.594
C	03	2.000	0.375	1.375	0.750	0.062	0.625	0.999	0.423	0.938	0.688
C	04	2.000	0.500	1.500	0.750	0.062	0.625	0.999	0.622	1.062	0.750
D	02	2.250	0.250	1.250	0.750	0.062	0.813	1.187	0.302	0.750	0.625
D	03	2.250	0.375	1.375	0.750	0.062	0.813	1.187	0.423	0.875	0.688
D	04	2.250	0.500	1.500	0.750	0.062	0.813	1.187	0.622	1.062	0.750
E	02	2.750	0.250	1.250	0.750	0.125	1.000	1.437	0.302	0.812	0.625
E	03	2.750	0.375	1.375	0.750	0.125	1.000	1.437	0.423	0.906	0.688
E	04	2.750	0.500	1.500	0.750	0.125	1.000	1.437	0.622	1.062	0.750
E	06	2.750	0.750	1.750	0.875	0.125	1.000	1.437	0.824	1.281	0.875
E	08	2.750	1.000	2.250	0.875	0.125	1.000	1.437	0.957	1.656	1.125
F	02	3.500	0.250	1.125	0.750	0.125	1.500	2.124	0.302	0.750	0.563
F	03	3.500	0.375	1.375	0.750	0.125	1.500	2.124	0.423	0.906	0.688
F	04	3.500	0.500	1.625	0.750	0.125	1.500	2.124	0.622	1.125	0.813
F	06	3.500	0.750	1.875	0.875	0.125	1.500	2.124	0.824	1.344	0.938
F	08	3.500	1.000	2.125	0.875	0.125	1.500	2.124	0.957	1.656	1.063
F	10	3.500	1.250	2.625	0.875	0.125	1.500	2.124	1.278	2.000	1.313
F	12	3.500	1.500	2.938	0.875	0.125	1.500	2.124	1.500	2.125	1.469
G	16	4.250	2.000	3.500	1.000	0.125	1.750	2.374	1.689	2.594	1.750

SH 13203052

FIGURE 2. Right angle flange - pipe. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

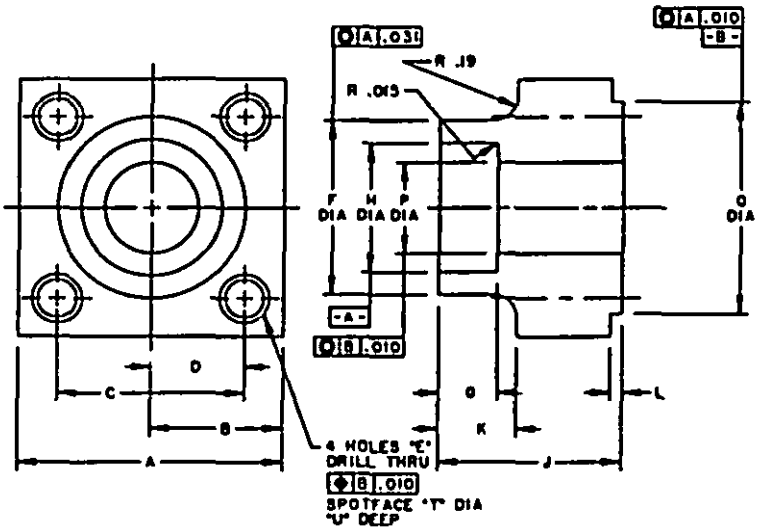

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030

PART NUMBER --- M 24704/1 T# ** xx
** --- SELECTED FROM BELOW

#	**	FLANGE SIZE	PIPE SIZE N.P.S.	A SQ	B	C SQ	D	E	F	G +.031 -.000	H +.005 -.000
B	02	1.750	0.250	1.750	0.875	1.125	0.562	0.344	0.750	0.500	0.260
B	04	1.750	0.500	1.750	0.875	1.125	0.562	0.344	0.750	0.500	0.510
C	04	2.000	0.500	2.000	1.000	1.312	0.656	0.406	1.125	0.500	0.510
C	06	2.000	0.750	2.000	1.000	1.312	0.656	0.406	1.125	0.500	0.760
D	04	2.250	0.500	2.250	1.125	1.500	0.750	0.469	1.312	0.500	0.510
D	06	2.250	0.750	2.250	1.125	1.500	0.750	0.469	1.312	0.500	0.760
D	08	2.250	1.000	2.250	1.125	1.500	0.750	0.469	1.312	0.500	1.010
E	04	2.750	0.500	2.750	1.375	1.875	0.938	0.469	1.312	0.500	0.510
E	06	2.750	0.750	2.750	1.375	1.875	0.938	0.469	1.312	0.500	0.760
E	08	2.750	1.000	2.750	1.375	1.875	0.938	0.469	1.875	0.500	1.010
E	12	2.750	1.500	2.750	1.375	1.875	0.938	0.469	1.875	0.500	1.510
F	04	3.500	0.500	3.500	1.750	2.500	1.250	0.531	1.312	0.500	0.510
F	06	3.500	0.750	3.500	1.750	2.500	1.250	0.531	1.312	0.500	0.760
F	08	3.500	1.000	3.500	1.750	2.500	1.250	0.531	2.562	0.500	1.010
F	12	3.500	1.500	3.500	1.750	2.500	1.250	0.531	2.562	0.500	1.510
F	16	3.500	2.000	3.500	1.750	2.500	1.250	0.531	2.562	0.625	2.010

SH 13203053

FIGURE 3. Straight flange - tube.

Source: https://assist.dla.mil -- Downloaded: 202610-20T01:08Z
Check the source to verify that this is the current version before use.

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030


PART NUMBER --- M 24704/1 T# ** xx
** --- SELECTED FROM BELOW

#	**	FLANGE SIZE	PIPE SIZE N.P.S.	J	K	L +.002 -.000	P +.010 -.000	Q +.000 -.002	T	U
B	02	1.750	0.250	1.313	0.781	0.062	0.093	0.687	0.562	0.031
B	04	1.750	0.500	1.313	0.781	0.062	0.350	0.687	0.562	0.031
C	04	2.000	0.500	1.313	0.781	0.062	0.350	0.999	0.688	0.031
C	06	2.000	0.750	1.313	0.781	0.062	0.520	0.999	0.688	0.031
D	04	2.250	0.500	1.594	0.781	0.062	0.350	1.187	0.750	0.031
D	06	2.250	0.750	1.594	0.781	0.062	0.520	1.187	0.750	0.031
D	08	2.250	1.000	1.594	0.781	0.062	0.720	1.187	0.750	0.031
E	04	2.750	0.500	1.656	0.781	0.125	0.350	1.437	0.750	0.031
E	06	2.750	0.750	1.781	0.781	0.125	0.520	1.437	0.750	0.031
E	08	2.750	1.000	1.781	0.906	0.125	0.720	1.437	0.750	0.031
E	12	2.750	1.500	1.781	0.906	0.125	1.080	1.437	0.750	0.031
F	04	3.500	0.500	2.000	0.781	0.125	0.350	2.124	0.938	0.031
F	06	3.500	0.750	2.125	0.781	0.125	0.520	2.124	0.938	0.031
F	08	3.500	1.000	2.125	0.906	0.125	0.720	2.124	0.938	0.031
F	12	3.500	1.500	2.250	0.906	0.125	1.080	2.124	0.938	0.031
F	16	3.500	2.000	2.250	0.906	0.125	1.410	2.124	0.938	0.031

SH 13203053

FIGURE 3. Straight flange - tube. - Continued

Source: https://assist.dla.mil - Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

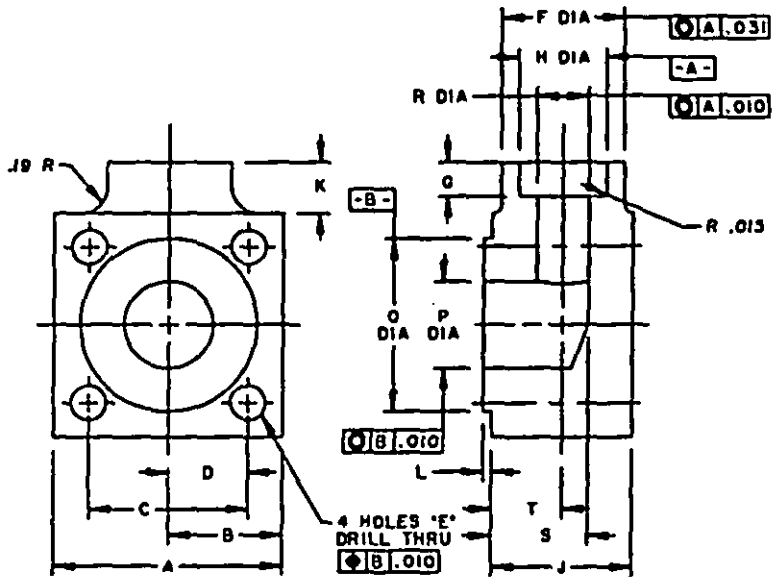

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030

PART NUMBER --- M 24704/1 R// ** xx
// ** --- SELECTED FROM BELOW

//	**	FLANGE SIZE	PIPE SIZE N.P.S.	A SQ	B	C SQ	D	E	F	G +.031 -.000	H +.005 -.000
B	02	1.750	0.250	1.750	0.875	1.125	0.562	0.344	0.750	0.500	0.260
B	04	1.750	0.500	1.750	0.875	1.125	0.562	0.344	0.750	0.500	0.510
C	04	2.000	0.500	2.000	1.000	1.312	0.656	0.406	1.125	0.500	0.510
C	06	2.000	0.750	2.000	1.000	1.312	0.656	0.406	1.125	0.500	0.760
D	04	2.250	0.500	2.250	1.125	1.500	0.750	0.469	1.312	0.500	0.510
D	06	2.250	0.750	2.250	1.125	1.500	0.750	0.469	1.312	0.500	0.760
D	08	2.250	1.000	2.250	1.125	1.500	0.750	0.469	1.312	0.500	1.010
E	04	2.750	0.500	2.750	1.375	1.875	0.938	0.469	1.312	0.500	0.510
E	06	2.750	0.750	2.750	1.375	1.875	0.938	0.469	1.312	0.500	0.760
E	08	2.750	1.000	2.750	1.375	1.875	0.938	0.469	1.875	0.500	1.010
E	12	2.750	1.500	2.750	1.375	1.875	0.938	0.469	1.875	0.500	1.510
F	04	3.500	0.500	3.500	1.750	2.500	1.250	0.531	1.312	0.500	0.510
F	06	3.500	0.750	3.500	1.750	2.500	1.250	0.531	1.312	0.500	0.760
F	08	3.500	1.000	3.500	1.750	2.500	1.250	0.531	1.312	0.500	1.010
F	12	3.500	1.500	3.500	1.750	2.500	1.250	0.531	2.562	0.500	1.510
F	16	3.500	2.000	3.500	1.750	2.500	1.250	0.531	2.562	0.625	2.010

SH 13203054

FIGURE 4. Right angle flange - tube.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030


PART NUMBER --- M 24704/1 R# ** xx
** --- SELECTED FROM BELOW

#	**	FLANGE SIZE	PIPE SIZE N.P.S.	J	K +.015 -.000	L +.002 -.000	P +.000 -.015	Q +.000 -.002	S	T
B	02	1.750	0.250	1.188	0.500	0.062	0.093	0.687	0.719	0.594
B	04	1.750	0.500	1.188	0.500	0.062	0.350	0.687	0.719	0.594
C	04	2.000	0.500	1.500	0.594	0.062	0.350	0.999	0.875	0.750
C	06	2.000	0.750	1.750	0.594	0.062	0.520	0.999	1.063	0.875
D	04	2.250	0.500	1.500	0.750	0.062	0.350	1.187	0.875	0.750
D	06	2.250	0.750	1.750	0.750	0.062	0.520	1.187	1.063	0.875
D	08	2.250	1.000	2.250	0.750	0.062	0.720	1.187	1.406	1.125
E	04	2.750	0.500	1.500	1.125	0.125	0.350	1.437	0.875	0.750
E	06	2.750	0.750	1.750	1.125	0.125	0.520	1.437	1.063	0.875
E	08	2.750	1.000	2.250	1.125	0.125	0.720	1.437	1.406	1.125
E	12	2.750	1.500	2.250	1.125	0.125	1.080	1.437	1.531	1.125
F	04	3.500	0.500	1.625	1.500	0.125	0.350	2.124	0.938	0.813
F	06	3.500	0.750	1.875	1.500	0.125	0.520	2.124	1.125	0.938
F	08	3.500	1.000	2.125	1.500	0.125	0.720	2.124	1.344	1.063
F	12	3.500	1.500	2.938	1.500	0.125	1.080	2.124	1.875	1.469
F	16	3.500	2.000	2.938	1.500	0.125	1.410	2.124	2.031	1.500

SH 13203054

FIGURE 4. Right angle flange - tube. - Continued

Source: https://assist.dla.mil - Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

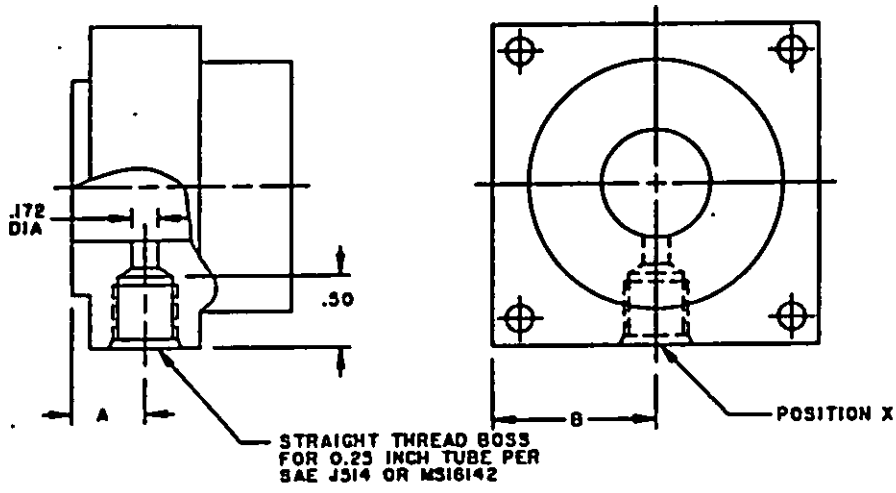

THE VENT PORT CAN BE LOCATED AT POSITION X FOR THE FOLLOWING FLANGES. INSERT THE LETTER X AT THE APPROPRIATE LOCATION IN THE FLANGE PART NUMBER. FOR FLANGES WITHOUT VENT REQUIREMENT, INSERT THE LETTER W.


UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030

// **	FLANGE SIZE (INCH)	PIPE SIZE N.P.S.	A	B
F 02	3.500	0.250	0.672	1.750
F 03	3.500	0.375	0.672	1.750
F 04	3.500	0.500	0.672	1.750
F 06	3.500	0.750	0.672	1.750
F 08	3.500	1.000	0.672	1.750
F 10	3.500	1.250	0.734	1.750
F 12	3.500	1.500	0.734	1.750
G 16	4.250	2.000	0.906	2.125

SH 13203055

FIGURE 5. Straight flange vent location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

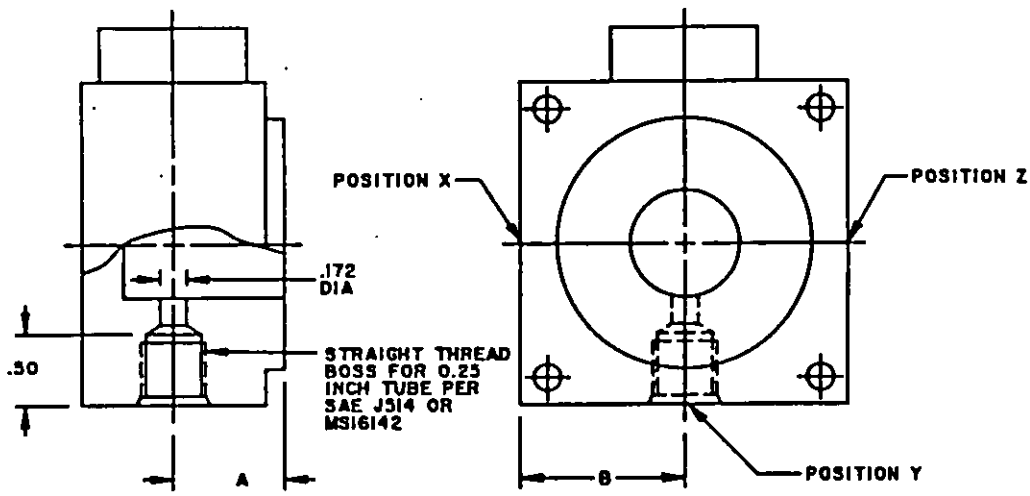

THE VENT PORT CAN BE LOCATED AT POSITION X,Y, OR Z FOR THE FOLLOWING FLANGES. INSERT THE LETTER X,Y, OR Z AT THE APPROPRIATE LOCATION IN THE FLANGE PART NUMBER. FOR FLANGES WITHOUT VENT REQUIREMENT, INSERT THE LETTER W.

UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030

# **	FLANGE SIZE (INCH)	PIPE SIZE N.P.S.	A	B
D 02	2.250	0.250	0.687	1.125
D 03	2.250	0.375	0.750	1.125
D 04	2.250	0.500	0.813	1.125
E 02	2.750	0.250	0.750	1.375
E 03	2.750	0.375	0.812	1.375
E 04	2.750	0.500	0.875	1.375
E 06	2.750	0.750	1.000	1.375
E 08	2.750	1.000	1.250	1.375
F 02	3.500	0.250	0.688	1.750
F 03	3.500	0.375	0.812	1.750
F 04	3.500	0.500	0.938	1.750
F 06	3.500	0.750	1.063	1.750
F 08	3.500	1.000	1.188	1.750
F 10	3.500	1.250	1.438	1.750
F 12	3.500	1.500	1.594	1.750
G 16	4.250	2.000	1.875	2.125

SH 13203056

FIGURE 6. Right angle flange vent location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - SH
(Project 4810-N060-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.