INCH-POUND
MIL-DTL-24704/1B(SH)
4 October 2011
SUPERSEDING
MIL-F-24704/1A(SH)
23 March 1992

DETAIL SPECIFICATION

FLANGES, FOUR BOLT SQUARE, SOCKET WELD FOR HYDRAULIC SYSTEMS

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24704.

Scope. This specification sheet covers the requirements for four bolt square socket weld flanges for use in 3000 pounds per square inch (lb/in^2) hydraulic systems.

Part or identifying number (PIN). PINs to be used for socket weld flanges acquired to this specification are created as follows:

M	24704	/1	X	X	XX	X	X
Specification prefix	Specification number	Specification sheet number	Flange style (see code below)	Flange (square) size (see code below)	Pipe (tube) size (see code below)	Material (see code below)	Vent requirement (see code below)

Example: The PIN for a straight flange for NPS piping, size 1.5 square inches, 2 inches NPS, made of Corrosion Resistant (CRES) Class 316, with a vent located at position X (figure 5) would be written as M24704/1SA16CX.

Flange style. The flange style designation letter indicates whether a straight or angle flange and whether for tubing or NPS piping as indicated below:

Code	Description
S	Straight flange for NPS piping (see figure 1)
L	Right angle flange for NPS piping (see figure 2)
T	Straight flange for outside diameter (OD) tubing (see figure 3)
R	Right angle flange for OD tubing (see figure 4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Flange (square) size. The square size of the flange shall be designated by a letter in accordance with the following list (see figures 1, 2, 3, and 4 for listing of compatible flange and pipe (tube) sizes):

Code	Square Size (in)
A	1.50
B	1.75
C	2.00
D	2.25
E	2.75
F	3.50
G	4.25

Pipe (tube) size. The pipe or tubing size shall be designated as a two digit number in accordance with the following list:

Size	Pipe (NPS)	Tube (OD)
01	⅛ (0.405 OD)	--
02	¼ (0.540 OD)	0.25
03	⅜ (0.675 OD)	0.375
04	½ (0.840 OD)	0.500
06	¾ (1.050 OD)	0.750
08	1 (1.315 OD)	1.000
10	1¼ (1.660 OD)	1.250
12	1½ (1.900 OD)	1.500
16	2 (2.375 OD)	2.000

Material. The flange material shall be designated by a letter as indicated below:

Code	Flange material
C	Corrosion-resistant steel (CRES), Type/Class 304 or 316 in accordance with ASTM A276, ASTM A473, or SAE-AMS-QQ-S-763.
L	Corrosion-resistant steel (CRES), Type/Class 304L or 316L in accordance with ASTM A276, ASTM A473, or SAE-AMS-QQ-S-763.
N	Nickel copper alloy in accordance with QQ-N-281, Class A or ASTM B127 (UNS N04400 only).

Vent requirement. The vent requirement shall be designated by a letter X, Y, or Z as indicated on figure 5 and figure 6. For flanges without a vent, the letter W shall be used. Machining for the vent port shall be as shown on the applicable figures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

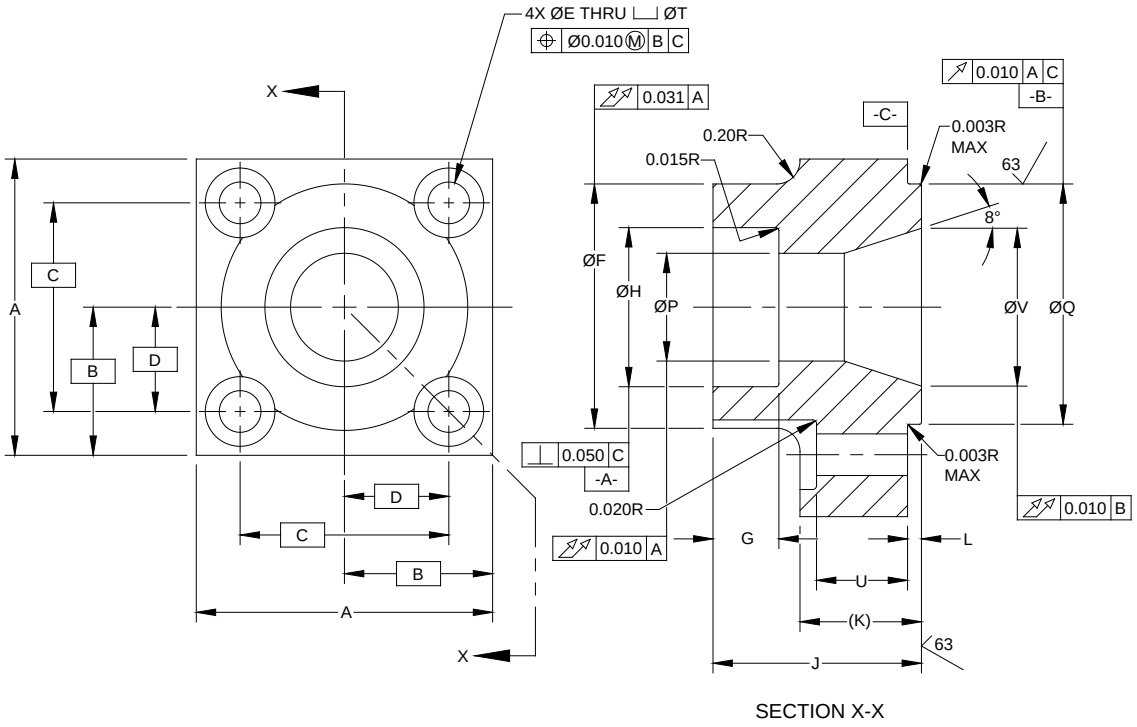


FIGURE 1. Straight flange – pipe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Surface roughness shall not exceed 125 microinches.
- Tolerances shall be:

  .XXX ±0.015

  .XX ±0.03

- Break edges and corners to 0.005 radius max.

PIN --- M24704/1 S# ** xx

**--- Selected from below.

#	**	Flange size (in inches)	Pipe size (NPS)	A Sq	B	C Sq	D	E +0.010 -0.010	F	G +0.031 -0.000	H +0.005 -0.000
A	01	1.50	0.125	1.50	0.75	0.938	0.469	0.281	0.812	0.375	0.425
B	01	1.75	0.125	1.75	0.88	1.125	0.562	0.344	0.812	0.375	0.425
B	02	1.75	0.250	1.75	0.88	1.125	0.562	0.344	0.969	0.375	0.560
C	02	2.00	0.250	2.00	1.00	1.312	0.656	0.406	0.969	0.375	0.560
C	03	2.00	0.375	2.00	1.00	1.312	0.656	0.406	1.125	0.375	0.695
D	02	2.25	0.250	2.25	1.12	1.500	0.750	0.469	0.969	0.375	0.560
D	03	2.25	0.375	2.25	1.12	1.500	0.750	0.469	1.125	0.375	0.695
D	04	2.25	0.500	2.25	1.12	1.500	0.750	0.469	1.281	0.375	0.860
E	02	2.75	0.250	2.75	1.38	1.875	0.938	0.469	0.969	0.375	0.560
E	03	2.75	0.375	2.75	1.38	1.875	0.938	0.469	1.125	0.375	0.695
E	04	2.75	0.500	2.75	1.38	1.875	0.938	0.469	1.281	0.375	0.860
E	06	2.75	0.750	2.75	1.38	1.875	0.938	0.469	1.531	0.500	1.070
E	08	2.75	1.000	2.75	1.38	1.875	0.938	0.469	1.875	0.500	1.335
F	02	3.50	0.250	3.50	1.75	2.500	1.250	0.531	0.969	0.375	0.560
F	03	3.50	0.375	3.50	1.75	2.500	1.250	0.531	1.125	0.375	0.695
F	04	3.50	0.500	3.50	1.75	2.500	1.250	0.531	1.281	0.375	0.860
F	06	3.50	0.750	3.50	1.75	2.500	1.250	0.531	1.531	0.500	1.070
F	08	3.50	1.000	3.50	1.75	2.500	1.250	0.531	1.875	0.500	1.335
F	10	3.50	1.250	3.50	1.75	2.500	1.250	0.531	2.250	0.500	1.680
F	12	3.50	1.500	3.50	1.75	2.500	1.250	0.531	2.563	0.500	1.920
G	16	4.25	2.000	4.25	2.12	3.062	1.531	0.656	3.188	0.625	2.411

FIGURE 1. Straight flange – pipe – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Surface roughness shall not exceed 125 microinches.
- Tolerances shall be:

  .XXX ±0.015

  .XX ±0.03

- Break edges and corners to 0.005 radius max.

PIN --- M24704/1 S# ** xx

**--- Selected from below.

#	**	Flange size (in inches)	Pipe size (NPS)	J	K	L +0.002 -0.000	P +0.010 -0.000	Q +0.000 -0.002	V +0.000 -0.015	S ±2.5 Deg	T	U
A	01	1.50	0.125	1.313	0.53	0.062	0.215	0.487	-	-	0.561	0.404
B	01	1.75	0.125	1.313	0.53	0.062	0.215	0.687	-	15.0	0.623	0.404
B	02	1.75	0.250	1.313	0.53	0.062	0.302	0.687	0.375	15.0	0.623	0.404
C	02	2.00	0.250	1.313	0.53	0.062	0.302	0.999	0.625	15.0	0.717	0.404
C	03	2.00	0.375	1.313	0.53	0.062	0.423	0.999	0.625	15.0	0.717	0.404
D	02	2.25	0.250	1.594	0.81	0.062	0.302	1.187	0.813	22.5	0.811	0.658
D	03	2.25	0.375	1.594	0.81	0.062	0.423	1.187	0.813	15.0	0.811	0.658
D	04	2.25	0.500	1.594	0.81	0.062	0.622	1.187	0.813	15.0	0.811	0.658
E	02	2.75	0.250	1.656	0.87	0.125	0.302	1.437	1.000	22.5	0.811	0.657
E	03	2.75	0.375	1.656	0.87	0.125	0.423	1.437	1.000	15.0	0.811	0.657
E	04	2.75	0.500	1.656	0.87	0.125	0.622	1.437	1.000	15.0	0.811	0.657
E	06	2.75	0.750	1.781	0.87	0.125	0.824	1.437	1.000	15.0	0.811	0.657
E	08	2.75	1.000	1.781	0.87	0.125	0.957	1.437	1.000	15.0	0.811	0.657
F	02	3.50	0.250	2.000	1.25	0.125	0.302	2.124	1.500	30.0	0.915	1.032
F	03	3.50	0.375	2.000	1.25	0.125	0.423	2.124	1.500	22.5	0.915	1.032
F	04	3.50	0.500	2.000	1.25	0.125	0.622	2.124	1.500	22.5	0.915	1.032
F	06	3.50	0.750	2.125	1.25	0.125	0.824	2.124	1.500	22.5	0.915	1.032
F	08	3.50	1.000	2.125	1.25	0.125	0.957	2.124	1.500	15.0	0.915	1.032
F	10	3.50	1.250	2.250	1.37	0.125	1.278	2.124	1.500	5.0	0.915	1.032
F	12	3.50	1.500	2.250	1.37	0.125	1.500	2.124	-	-	0.915	1.032
G	16	4.25	2.000	2.594	1.75	0.125	1.689	2.374	1.750	15.0	1.228	1.125

FIGURE 1. Straight flange – pipe – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

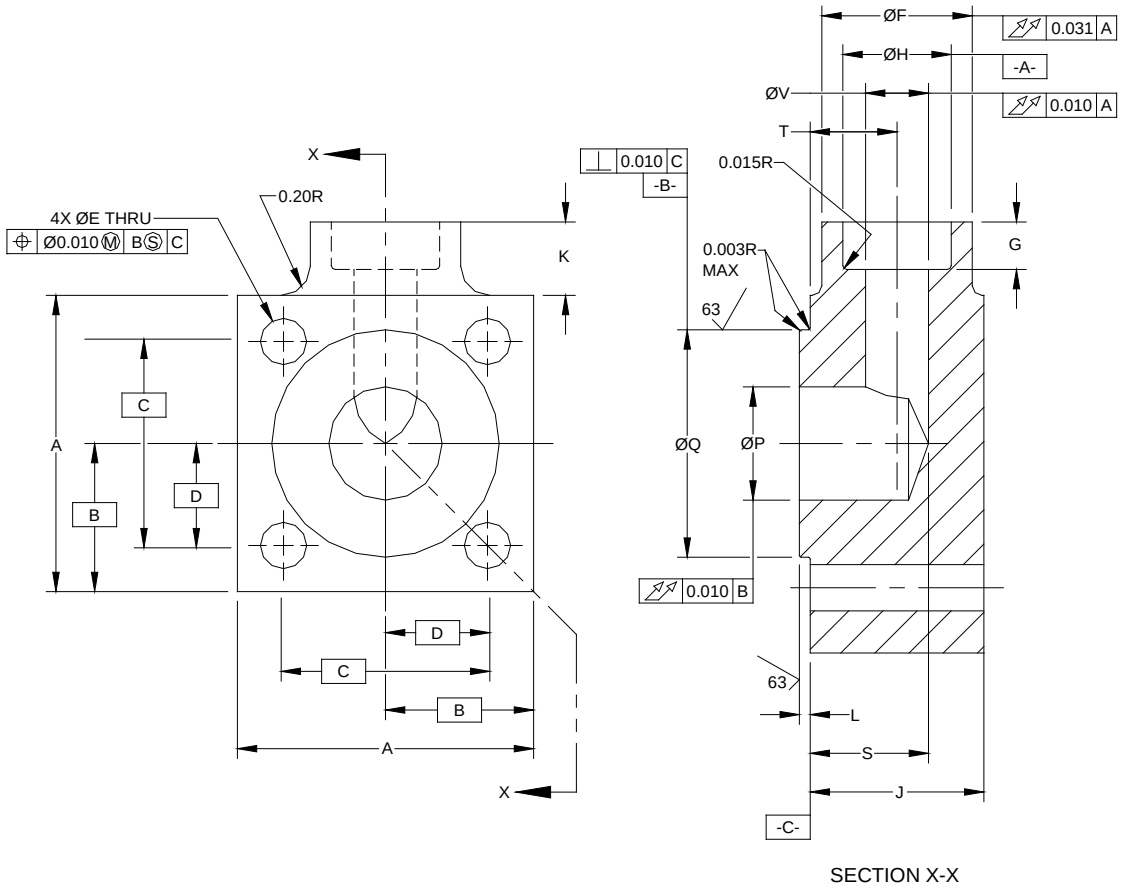


FIGURE 2. Right angle flange – pipe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Surface roughness shall not exceed 125 microinches.
- Tolerances shall be:

  .XXX ±0.015

  .XX ±0.03

- Break edges and corners to 0.005 radius max.

PIN --- M24704/1 L# ** xx

**--- Selected from below.

#	**	Flange size (in inches)	Pipe size (NPS)	A Sq	B	C Sq	D	E +0.010 -0.010	F	G +0.031 -0.000	H +0.005 -0.000
B	01	1.75	0.125	1.75	0.88	1.125	0.562	0.344	0.969	0.375	0.425
B	02	1.75	0.250	1.75	0.88	1.125	0.562	0.344	0.969	0.375	0.560
C	02	2.00	0.250	2.00	1.00	1.312	0.656	0.406	0.969	0.375	0.560
C	03	2.00	0.375	2.00	1.00	1.312	0.656	0.406	1.125	0.375	0.695
C	04	2.00	0.500	2.00	1.00	1.312	0.656	0.406	1.281	0.375	0.860
D	02	2.25	0.250	2.25	1.12	1.500	0.750	0.469	0.969	0.375	0.560
D	03	2.25	0.375	2.25	1.12	1.500	0.750	0.469	1.125	0.375	0.695
D	04	2.25	0.500	2.25	1.12	1.500	0.750	0.469	1.281	0.375	0.860
E	02	2.75	0.250	2.75	1.38	1.875	0.938	0.469	0.969	0.375	0.560
E	03	2.75	0.375	2.75	1.38	1.875	0.938	0.469	1.125	0.375	0.695
E	04	2.75	0.500	2.75	1.38	1.875	0.938	0.469	1.281	0.375	0.860
E	06	2.75	0.750	2.75	1.38	1.875	0.938	0.469	1.531	0.500	1.070
E	08	2.75	1.000	2.75	1.38	1.875	0.938	0.469	1.875	0.500	1.335
F	02	3.50	0.250	3.50	1.75	2.500	1.250	0.531	0.969	0.375	0.560
F	03	3.50	0.375	3.50	1.75	2.500	1.250	0.531	1.125	0.375	0.695
F	04	3.50	0.500	3.50	1.75	2.500	1.250	0.531	1.281	0.375	0.860
F	06	3.50	0.750	3.50	1.75	2.500	1.250	0.531	1.531	0.500	1.070
F	08	3.50	1.000	3.50	1.75	2.500	1.250	0.531	1.875	0.500	1.335
F	10	3.50	1.250	3.50	1.75	2.500	1.250	0.531	2.250	0.500	1.680
F	12	3.50	1.500	3.50	1.75	2.500	1.250	0.531	2.563	0.500	1.920
G	16	4.25	2.000	4.25	2.12	3.062	1.531	0.656	3.375	0.625	2.411

FIGURE 2. Right angle flange – pipe – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Surface roughness shall not exceed 125 microinches.
- Tolerances shall be:

  .XXX ±0.015

  .XX ±0.03

- Break edges and corners to 0.005 radius max.

PIN --- M24704/1 L# ** xx

**--- Selected from below.

#	**	Flange size (in inches)	Pipe size (NPS)	J	K +0.015 -0.000	L +0.002 -0.000	P +0.010 -0.000	Q +0.000 -0.002	V +0.010 -0.000	S Max	T
B	01	1.75	0.125	1.265	0.750	0.062	0.375	0.687	0.215	0.781	0.594
B	02	1.75	0.250	1.265	0.750	0.062	0.375	0.687	0.302	0.781	0.594
C	02	2.00	0.250	1.188	0.750	0.062	0.625	0.999	0.302	0.781	0.594
C	03	2.00	0.375	1.421	0.750	0.062	0.625	0.999	0.423	0.938	0.688
C	04	2.00	0.500	1.671	0.750	0.062	0.625	0.999	0.622	1.062	0.750
D	02	2.25	0.250	1.312	0.750	0.062	0.813	1.187	0.302	0.750	0.625
D	03	2.25	0.375	1.406	0.750	0.062	0.813	1.187	0.423	0.875	0.688
D	04	2.25	0.500	1.562	0.750	0.062	0.813	1.187	0.622	1.062	0.750
E	02	2.75	0.250	1.312	0.750	0.125	1.000	1.437	0.302	0.812	0.625
E	03	2.75	0.375	1.406	0.750	0.125	1.000	1.437	0.423	0.906	0.688
E	04	2.75	0.500	1.562	0.750	0.125	1.000	1.437	0.622	1.062	0.750
E	06	2.75	0.750	1.781	0.875	0.125	1.000	1.437	0.824	1.281	0.875
E	08	2.75	1.000	2.312	0.875	0.125	1.000	1.437	0.957	1.656	1.125
F	02	3.50	0.250	1.189	0.750	0.125	1.500	2.124	0.302	0.750	0.563
F	03	3.50	0.375	1.439	0.750	0.125	1.500	2.124	0.423	0.906	0.688
F	04	3.50	0.500	1.689	0.750	0.125	1.500	2.124	0.622	1.125	0.813
F	06	3.50	0.750	1.939	0.875	0.125	1.500	2.124	0.824	1.344	0.938
F	08	3.50	1.000	2.189	0.875	0.125	1.500	2.124	0.957	1.656	1.063
F	10	3.50	1.250	2.689	0.875	0.125	1.500	2.124	1.278	2.000	1.313
F	12	3.50	1.500	2.939	0.875	0.125	1.500	2.124	1.500	2.125	1.469
G	16	4.25	2.000	3.532	1.000	0.125	1.750	2.374	1.689	2.594	1.750

FIGURE 2. Right angle flange – pipe – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

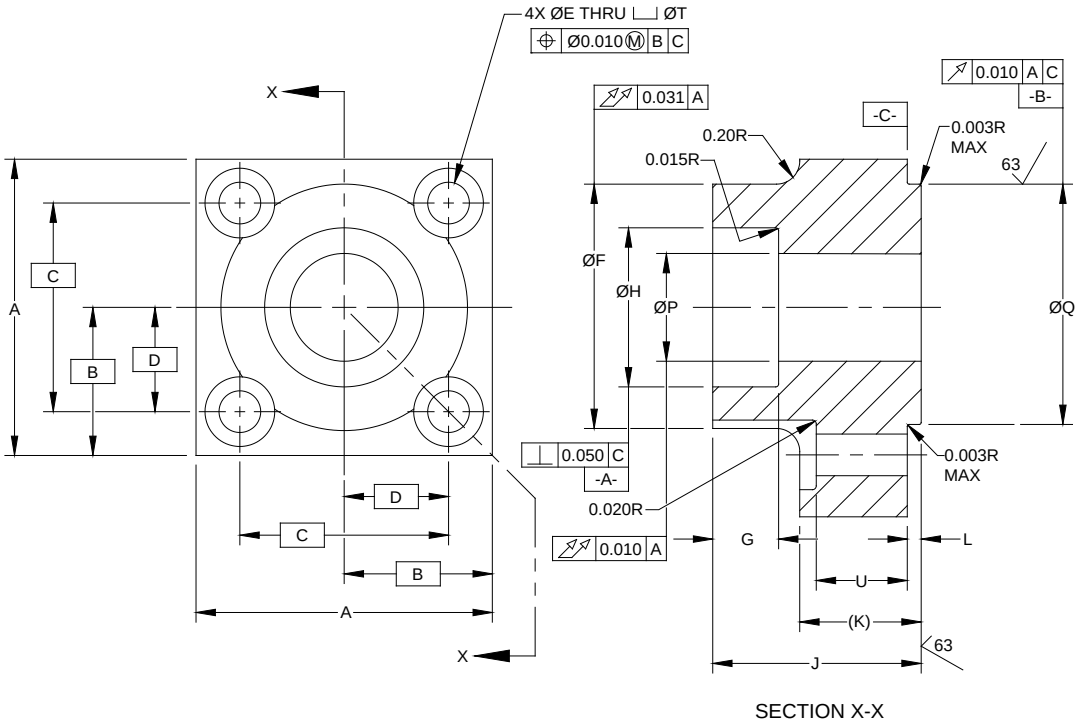


FIGURE 3. Straight flange – tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Surface roughness shall not exceed 125 microinches.
- Tolerances shall be:

  .XXX ±0.015

  .XX ±0.03

- Break edges and corners to 0.005 radius max.

PIN --- M24704/1 T# ** xx

**--- Selected from below.

#	**	Flange size (in inches)	Pipe size (NPS)	A Sq	B	C Sq	D	E +0.010 -0.010	F	G +0.031 -0.000	H +0.005 -0.000
B	02	1.75	0.250	1.75	0.88	1.125	0.562	0.344	0.750	0.500	0.260
B	04	1.75	0.500	1.75	0.88	1.125	0.562	0.344	0.750	0.500	0.510
C	04	2.00	0.500	2.00	1.00	1.312	0.656	0.406	1.125	0.500	0.510
C	06	2.00	0.750	2.00	1.00	1.312	0.656	0.406	1.125	0.500	0.760
D	04	2.25	0.500	2.25	1.12	1.500	0.750	0.469	1.312	0.500	0.510
D	06	2.25	0.750	2.25	1.12	1.500	0.750	0.469	1.312	0.500	0.760
D	08	2.25	1.000	2.25	1.12	1.500	0.750	0.469	1.312	0.500	1.010
E	04	2.75	0.500	2.75	1.38	1.875	0.938	0.469	1.312	0.500	0.510
E	06	2.75	0.750	2.75	1.38	1.875	0.938	0.469	1.312	0.500	0.760
E	08	2.75	1.000	2.75	1.38	1.875	0.938	0.469	1.875	0.500	1.010
E	12	2.75	1.500	2.75	1.38	1.875	0.938	0.469	1.875	0.500	1.510
F	04	3.50	0.500	3.50	1.75	2.500	1.250	0.531	1.312	0.500	0.510
F	06	3.50	0.750	3.50	1.75	2.500	1.250	0.531	1.312	0.500	0.760
F	08	3.50	1.000	3.50	1.75	2.500	1.250	0.531	2.562	0.500	1.010
F	12	3.50	1.500	3.50	1.75	2.500	1.250	0.531	2.562	0.500	1.510
F	16	3.50	2.000	3.50	1.75	2.500	1.250	0.531	2.562	0.625	2.010

FIGURE 3. Straight flange – tube – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Surface roughness shall not exceed 125 microinches.
- Tolerances shall be:

  .XXX ±0.015

  .XX ±0.03

- Break edges and corners to 0.005 radius max.

PIN --- M24704/1 T# ** xx

**--- Selected from below.

#	**	Flange size (in inches)	Pipe size (NPS)	J	K	L +0.002 -0.000	P +0.010 -0.000	Q +0.000 -0.002	T	U
B	02	1.75	0.250	1.313	0.53	0.062	0.093	0.687	0.623	0.404
B	04	1.75	0.500	1.313	0.53	0.062	0.350	0.687	0.623	0.404
C	04	2.00	0.500	1.313	0.53	0.062	0.350	0.999	0.717	0.404
C	06	2.00	0.750	1.313	0.53	0.062	0.520	0.999	0.717	0.404
D	04	2.25	0.500	1.594	0.81	0.062	0.350	1.187	0.811	0.658
D	06	2.25	0.750	1.594	0.81	0.062	0.520	1.187	0.811	0.658
D	08	2.25	1.000	1.594	0.81	0.062	0.720	1.187	0.811	0.658
E	04	2.75	0.500	1.656	0.87	0.125	0.350	1.437	0.811	0.657
E	06	2.75	0.750	1.781	0.87	0.125	0.520	1.437	0.811	0.657
E	08	2.75	1.000	1.781	0.87	0.125	0.720	1.437	0.811	0.657
E	12	2.75	1.500	1.781	0.87	0.125	1.080	1.437	0.811	0.657
F	04	3.50	0.500	2.000	1.25	0.125	0.350	2.124	0.915	1.032
F	06	3.50	0.750	2.125	1.25	0.125	0.520	2.124	0.915	1.032
F	08	3.50	1.000	2.125	1.25	0.125	0.720	2.124	0.915	1.032
F	12	3.50	1.500	2.250	1.37	0.125	1.080	2.124	0.915	1.032
F	16	3.50	2.000	2.250	1.37	0.125	1.410	2.124	0.915	1.032

FIGURE 3. Straight flange – tube – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

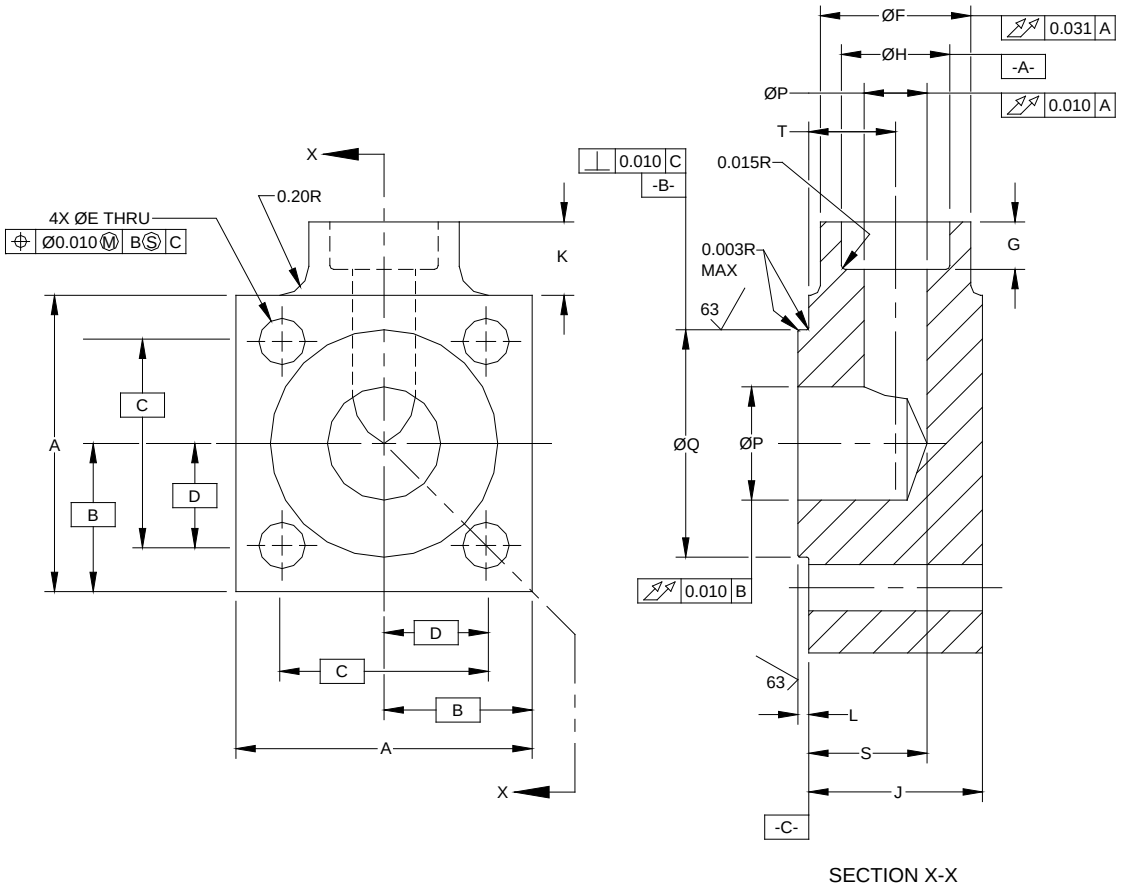


FIGURE 4. Right angle flange – tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Surface roughness shall not exceed 125 microinches.
- Tolerances shall be:

  .XXX ±0.015

  .XX ±0.03

- Break edges and corners to 0.005 radius max.

PIN --- M24704/1 R# ** xx

**--- Selected from below.

#	**	Flange size (in inches)	Pipe size (NPS)	A SQ	B	C SQ	D	E +0.010 -0.010	F	G +0.031 -0.000	H +0.005 -0.000
B	02	1.75	0.250	1.75	0.88	1.125	0.562	0.344	0.750	0.500	0.260
B	04	1.75	0.500	1.75	0.88	1.125	0.562	0.344	0.750	0.500	0.510
C	04	2.00	0.500	2.00	1.00	1.312	0.656	0.406	1.125	0.500	0.510
C	06	2.00	0.750	2.00	1.00	1.312	0.656	0.406	1.125	0.500	0.760
D	04	2.25	0.500	2.25	1.12	1.500	0.750	0.469	1.312	0.500	0.510
D	06	2.25	0.750	2.25	1.12	1.500	0.750	0.469	1.312	0.500	0.760
D	08	2.25	1.000	2.25	1.12	1.500	0.750	0.469	1.312	0.500	1.010
E	04	2.75	0.500	2.75	1.38	1.875	0.938	0.469	1.312	0.500	0.510
E	06	2.75	0.750	2.75	1.38	1.875	0.938	0.469	1.312	0.500	0.760
E	08	2.75	1.000	2.75	1.38	1.875	0.938	0.469	1.875	0.500	1.010
E	12	2.75	1.500	2.75	1.38	1.875	0.938	0.469	1.875	0.500	1.510
F	04	3.50	0.500	3.50	1.75	2.500	1.250	0.531	1.312	0.500	0.510
F	06	3.50	0.750	3.50	1.75	2.500	1.250	0.531	1.312	0.500	0.760
F	08	3.50	1.000	3.50	1.75	2.500	1.250	0.531	1.312	0.500	1.010
F	12	3.50	1.500	3.50	1.75	2.500	1.250	0.531	2.562	0.500	1.510
F	16	3.50	2.000	3.50	1.75	2.500	1.250	0.531	2.562	0.625	2.010

FIGURE 4. Right angle flange – tube – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Surface roughness shall not exceed 125 microinches.
- Tolerances shall be:

  .XXX ±0.015

  .XX ±0.03

- Break edges and corners to 0.005 radius max.


PIN --- M24704/1 R# ** xx

**--- Selected from below.

#	**	Flange size (in inches)	Pipe size (NPS)	J	K +0.015 -0.000	L +0.002 -0.000	P +0.010 -0.000	Q +0.000 -0.002	S Max	T
B	02	1.75	0.250	1.265	0.500	0.062	0.093	0.687	0.719	0.594
B	04	1.75	0.500	1.265	0.500	0.062	0.350	0.687	0.719	0.594
C	04	2.00	0.500	1.671	0.594	0.062	0.350	0.999	0.875	0.750
C	06	2.00	0.750	1.671	0.594	0.062	0.520	0.999	1.063	0.875
D	04	2.25	0.500	1.562	0.750	0.062	0.350	1.187	0.875	0.750
D	06	2.25	0.750	1.750	0.750	0.062	0.520	1.187	1.063	0.875
D	08	2.25	1.000	2.250	0.750	0.062	0.720	1.187	1.406	1.125
E	04	2.75	0.500	1.562	1.125	0.125	0.350	1.437	0.875	0.750
E	06	2.75	0.750	1.781	1.125	0.125	0.520	1.437	1.063	0.875
E	08	2.75	1.000	2.312	1.125	0.125	0.720	1.437	1.406	1.125
E	12	2.75	1.500	2.312	1.125	0.125	1.080	1.437	1.531	1.125
F	04	3.50	0.500	1.689	1.500	0.125	0.350	2.124	0.938	0.813
F	06	3.50	0.750	1.939	1.500	0.125	0.520	2.124	1.125	0.938
F	08	3.50	1.000	2.189	1.500	0.125	0.720	2.124	1.344	1.063
F	12	3.50	1.500	2.953	1.500	0.125	1.080	2.124	1.875	1.469
F	16	3.50	2.000	2.953	1.500	0.125	1.410	2.124	2.031	1.500

FIGURE 4. Right angle flange – tube – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

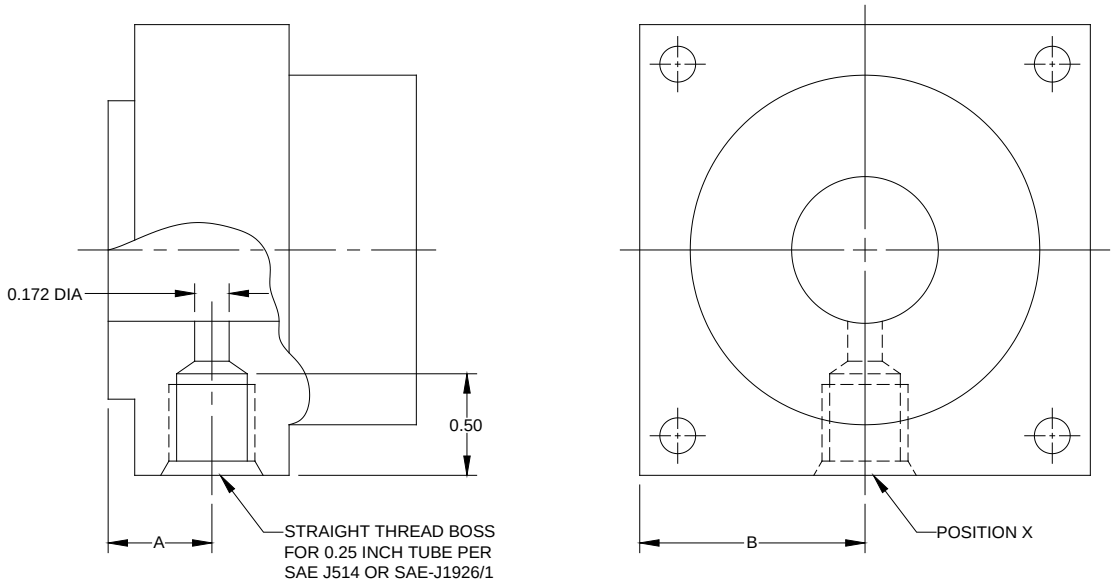

THE VENT PORT CAN BE LOCATED AT POSITION X FOR THE FOLLOWING FLANGES. INSERT THE LETTER X AT THE APPROPRIATE LOCATION IN THE FLANGE PART NUMBER. FOR FLANGES WITHOUT VENT REQUIREMENT, INSERT THE LETTER W.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Tolerances shall be:


  .XXX ±0.015

  .XX ±0.03

#	**	Flange size (in inches)	Pipe size (NPS)	A	B
F	02	3.50	0.250	0.672	1.75
F	03	3.50	0.375	0.672	1.75
F	04	3.50	0.500	0.672	1.75
F	06	3.50	0.750	0.672	1.75
F	08	3.50	1.000	0.672	1.75
F	10	3.50	1.250	0.734	1.75
F	12	3.50	1.500	0.734	1.75
G	16	4.25	2.000	0.906	2.12

FIGURE 5. Straight flange vent location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

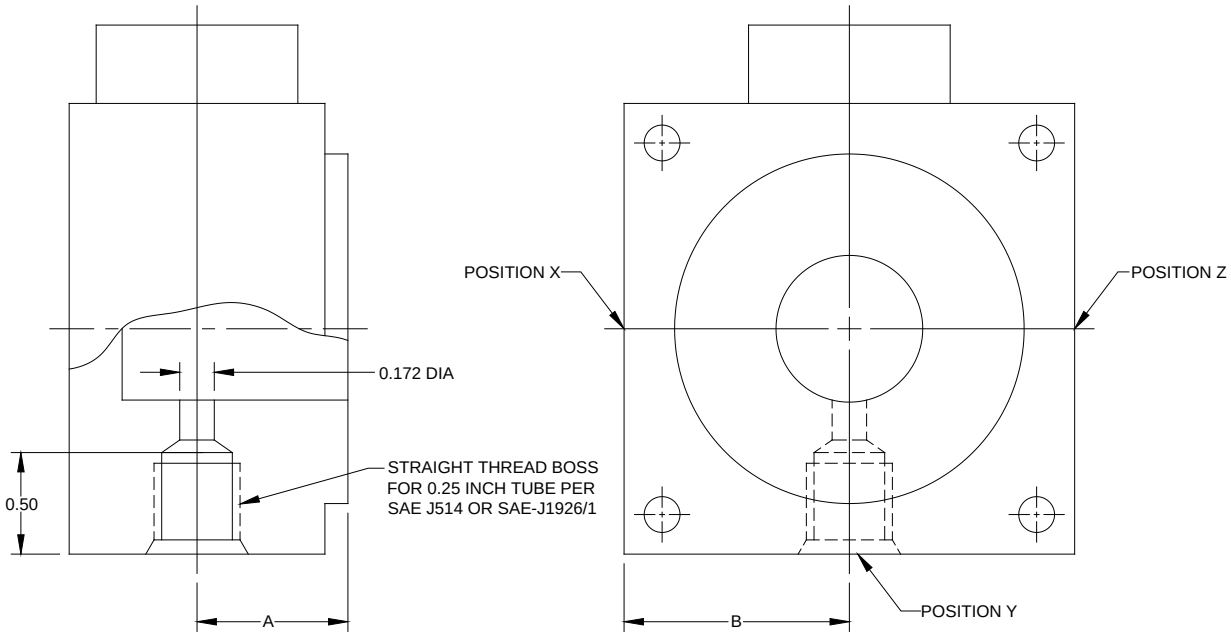

THE VENT PORT CAN BE LOCATED AT POSITION X, Y, OR Z FOR THE FOLLOWING FLANGES. INSERT THE LETTER X, Y, OR Z AT THE APPROPRIATE LOCATION IN THE FLANGE PART NUMBER. FOR FLANGES WITHOUT VENT REQUIREMENT, INSERT THE LETTER W.

FIGURE 6. Right angle flange vent location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.

Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):

- Tolerances shall be:

  .XXX ±0.015

  .XX ±0.03

#	**	Flange size (in inches)	Pipe size (NPS)	A	B
D	02	2.25	0.250	0.687	1.12
D	03	2.25	0.375	0.750	1.12
D	04	2.25	0.500	0.813	1.12
E	02	2.75	0.250	0.750	1.38
E	03	2.75	0.375	0.812	1.38
E	04	2.75	0.500	0.875	1.38
E	06	2.75	0.750	1.000	1.38
E	08	2.75	1.000	1.250	1.38
F	02	3.50	0.250	0.688	1.75
F	03	3.50	0.375	0.812	1.75
F	04	3.50	0.500	0.938	1.75
F	06	3.50	0.750	1.063	1.75
F	08	3.50	1.000	1.188	1.75
F	10	3.50	1.250	1.438	1.75
F	12	3.50	1.500	1.594	1.75
G	16	4.25	2.000	1.875	2.12

FIGURE 6. Right angle flange vent location – Continued.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing Activity:
Navy – SH
(Project 4810-2011-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:08Z
Check the source to verify that this is the current version before use.