# MILITARY SPECIFICATION SHEET

## FLANGES, FOUR BOLT SQUARE, BLIND FOR HYDRAULIC SYSTEMS

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the flange described herein shall consist of this specification and the latest issue of MIL-F-24704(SH).

SCOPE

Scope. This specification sheet covers the requirements for four bolt square blind flanges for use in 3000 pounds per square inch ($lb/in^2$) hydraulic systems.

Classification. Blind flanges shall be designated by standard part numbers as identified below:

| M | 24704 | /4 | B | A | C | X |
|---|---|---|---|---|---|---|
| Prefix to indicate specification | | | | | | |
| | Specification number | | | | | |
| | | Specification sheet number | | | | |
| | | | Flange style | | | |
| | | | | Flange (square) | | |
| | | | | | Material | |
| | | | | | | Vent requirement |

AMSC N/A FSC 4810

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited



Source: https://assist.dla.mil - Downloaded: 202640-20T01:09Z
Check the source to verify that this is the current version before use.

Flange style. The flange style designation letter, B, indicates that the flange is a blind flange for tubing or nominal pipe size (nps) piping.

Flange (square) size. The square size of the flange shall be designated by a letter in accordance with the following list (see figure 1 for listing of compatible flange sizes):

A - 1.50 inches square
B - 1.75
C - 2.00
D - 2.25
E - 2.75
F - 3.50
G - 4.25


Material. The flange material shall be designated by a letter as indicated below:

C - Corrosion resistant steel (CRES), class 304 or 316 in accordance with ASTM A 276, ASTM A 473 or QQ-S-763
L - Corrosion resistant steel (CRES), class 304L or 316L in accordance with ASTM A 276, ASTM A 473 or QQ-S-763
N - Nickel copper alloy in accordance with QQ-N-281, class A or ASTM B 127 (UNS N04400 only)

Vent requirement. The vent requirement shall be designated by a letter, X, Y or Z as indicated on figure 2. For flanges without a vent the letter W shall be used. Machining for the vent port shall be as shown on the applicable figure.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.

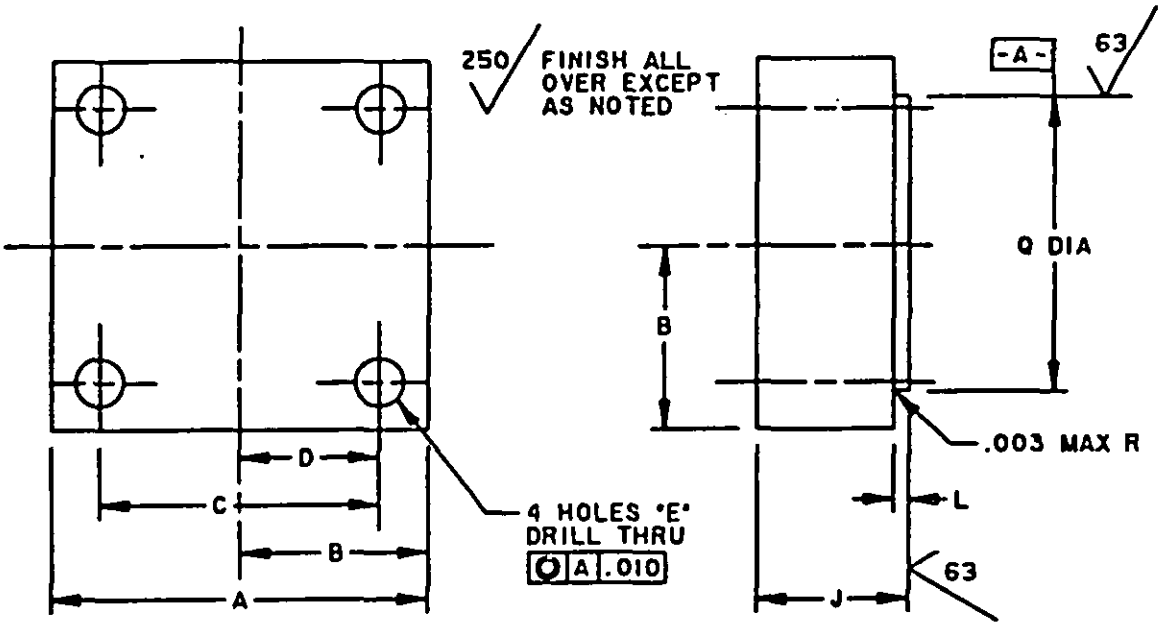


UNLESS OTHERWISE SPECIFIED
ALL TOLERANCES SHALL BE +/- 0.030

PART NUMBER ---- M 24704/4 B// ** xx
// ** --- SELECTED FROM BELOW


| // | FLANGE SIZE (INCH) | A SQ | B | C SQ | D | E | J | L +.002 -.000 | Q +.000 -.002 |
|---|---|---|---|---|---|---|---|---|---|
| A | 1.500 | 1.500 | 0.750 | 0.938 | 0.469 | 0.281 | 0.500 | 0.062 | 0.487 |
| B | 1.750 | 1.750 | 0.875 | 1.125 | 0.562 | 0.344 | 0.500 | 0.062 | 0.687 |
| C | 2.000 | 2.000 | 1.000 | 1.312 | 0.656 | 0.406 | 0.500 | 0.062 | 0.999 |
| D | 2.250 | 2.250 | 1.125 | 1.500 | 0.750 | 0.469 | 0.781 | 0.062 | 1.187 |
| E | 2.750 | 2.750 | 1.375 | 1.875 | 0.938 | 0.469 | 0.844 | 0.125 | 1.437 |
| F | 3.500 | 3.500 | 1.750 | 2.500 | 1.250 | 0.531 | 1.188 | 0.125 | 2.124 |
| G | 4.250 | 4.250 | 2.125 | 3.062 | 1.531 | 0.656 | 1.188 | 0.125 | 2.374 |

SH 13203070

FIGURE 1. Blind flange.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.

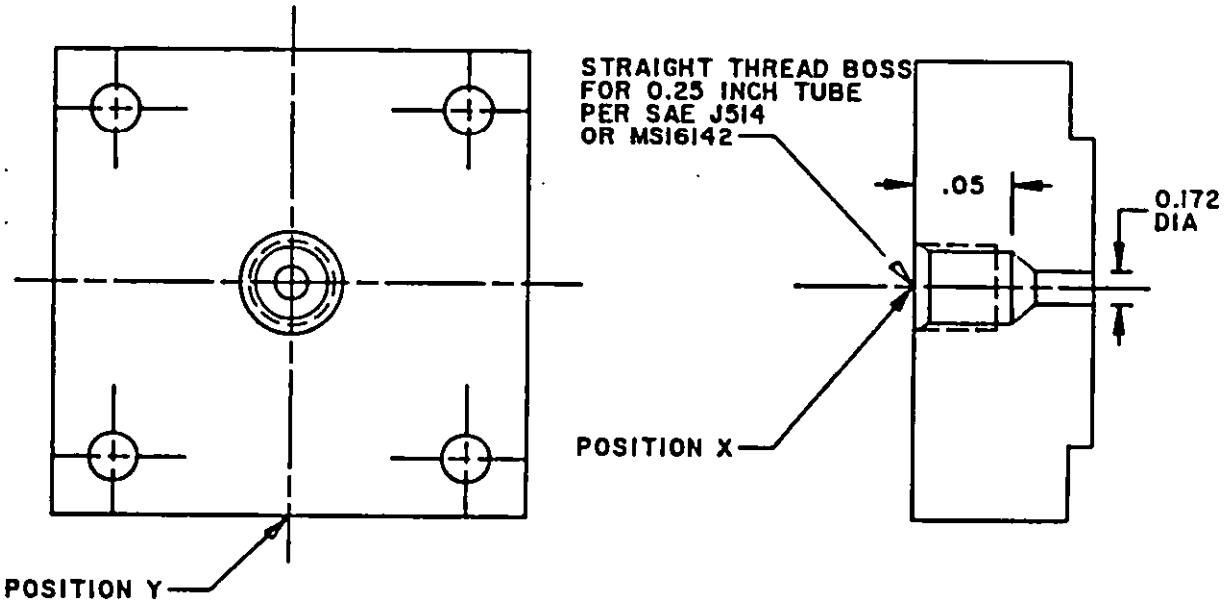


THE VENT PORT CAN BE LOCATED AT POSITION X OR Y FOR ALL FIGURE 1 FLANGES INSERT THE LETTER X OR Y AT THE APPROPRIATE LOCATION IN THE FLANGE PART NUMBER. FOR FLANGES WITHOUT VENT REQUIREMENT, INSERT THE LETTER W.

SH 13203071

FIGURE 2. Blind flange vent location.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - SH
(Project 4810-N060-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.