INCH-POUND
MIL-F-24704/4A(SH)
23 March 1992
SUPERSEDING
MIL-F-24704/4(SH)
30 November 1988

MILITARY SPECIFICATION SHEET

FLANGES, FOUR BOLT SQUARE, BLIND FOR HYDRAULIC SYSTEMS


This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-24704.

SCOPE

Scope. This specification sheet covers the requirements for four bolt square blind flanges for use in 3000 pounds per square inch (lb/in^2) hydraulic systems.

Classification. Blind flanges shall be designated by part identification numbers as identified below:

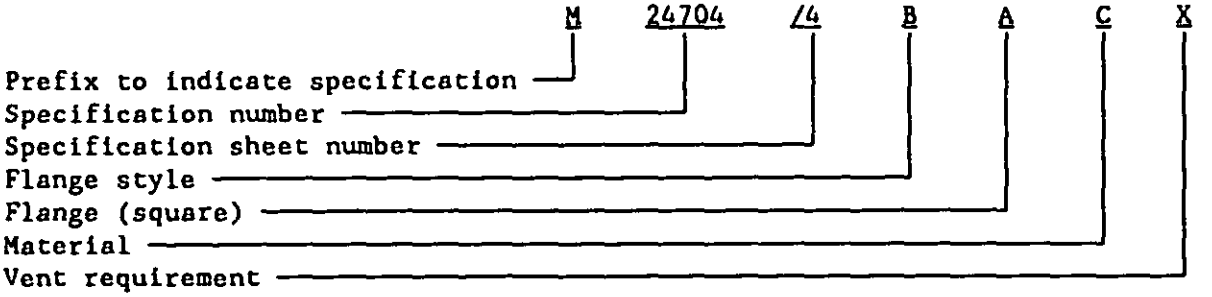

Example: The part identification number for a blind flange for tubing or nps piping, size 1.5 inches square, made of CRES Class 316, with a vent located at position X (Figure 2) would be written M24704/4BACX.

AMSC N/A FSC 4810

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-20T01:09Z
Check the source to verify that this is the current version before use.

Flange style. The flange style designation letter, B, indicates that the flange is a blind flange for tubing or nominal pipe size (nps) piping.

Flange (square) size. The square size of the flange shall be designated by a letter in accordance with the following list (see figure 1 for listing of compatible flange sizes):

A - 1.50 inches square.
B - 1.75
C - 2.00
D - 2.25
E - 2.75
F - 3.50
G - 4.25


Material. The flange material shall be designated by a letter as indicated below:

C - Corrosion resistant steel (CRES), class 304 or 316 in accordance with ASTM A 276, ASTM A 473 or QQ-S-763.
L - Corrosion resistant steel (CRES), class 304L or 316L in accordance with ASTM A 276, ASTM A 473 or QQ-S-763.
N - Nickel copper alloy in accordance with QQ-N-281, class A or ASTM B 127 (UNS N04400 only).

Vent requirement. The vent requirement shall be designated by a letter, X, Y or Z as indicated on figure 2. For flanges without a vent the letter W shall be used. Machining for the vent port shall be as shown on the applicable figure.

Changes from previous issue. Revision letters are not used to denote changes due to the extensiveness of the changes. These changes included changes made to the tolerancing used on figure 1 and the changing of the dimensions in the associated table.

Source: https://assist.dla.mil -- Downloaded: 202610-20T01:09Z
Check the source to verify that this is the current version before use.

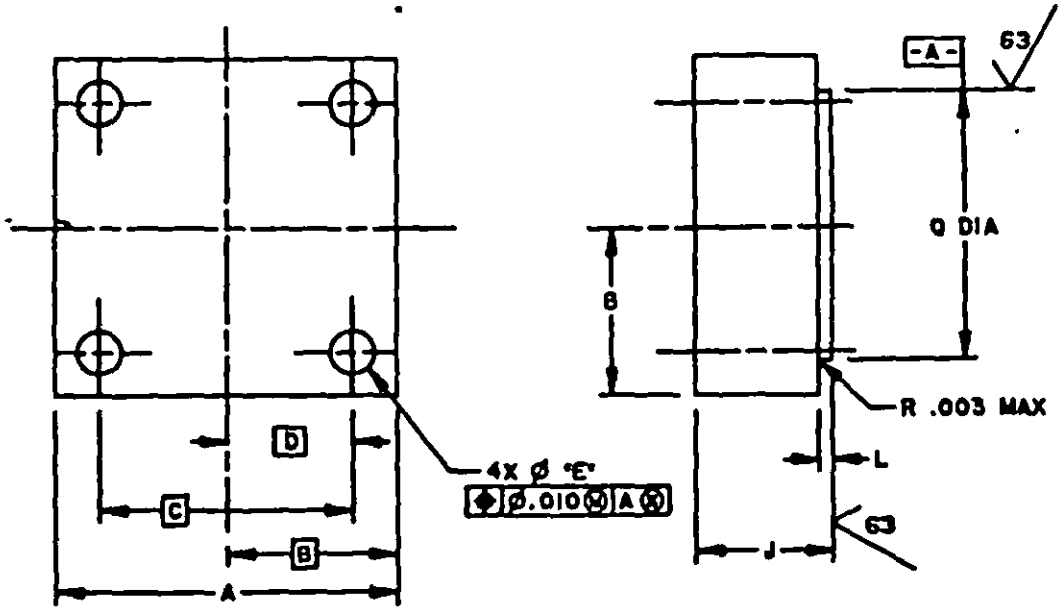

UNLESS OTHERWISE SPECIFIED


- Surface roughness shall not exceed 125 microinches.
- Tolerances shall be:
  .XXX +/-.015
  .XX +/-.03
- Break edges and corners to .005 Radius Max.

PART NUMBER ----M 24704/4 B# XX
--- SELECTED FROM BELOW

#	FLANGE SIZE (INCH)	A SQ	B	C SQ	D	E +.010 -.010	J	L +.002 -.000	Q +.000 -.002
A	1.50	1.50	0.75	0.938	0.469	0.281	0.466	0.062	0.487
B	1.75	1.75	0.88	1.125	0.562	0.344	0.466	0.062	0.687
C	2.00	2.00	1.00	1.312	0.656	0.406	0.466	0.062	0.999
D	2.25	2.25	1.12	1.500	0.750	0.469	0.720	0.062	1.187
E	2.75	2.75	1.38	1.875	0.938	0.469	0.782	0.125	1.437
F	3.50	3.50	1.75	2.500	1.250	0.531	1.157	0.125	2.124
G	4.25	4.25	2.12	3.062	1.531	0.656	1.250	0.125	2.374

FIGURE 1. Blind flange.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T01:09Z
Check the source to verify that this is the current version before use.

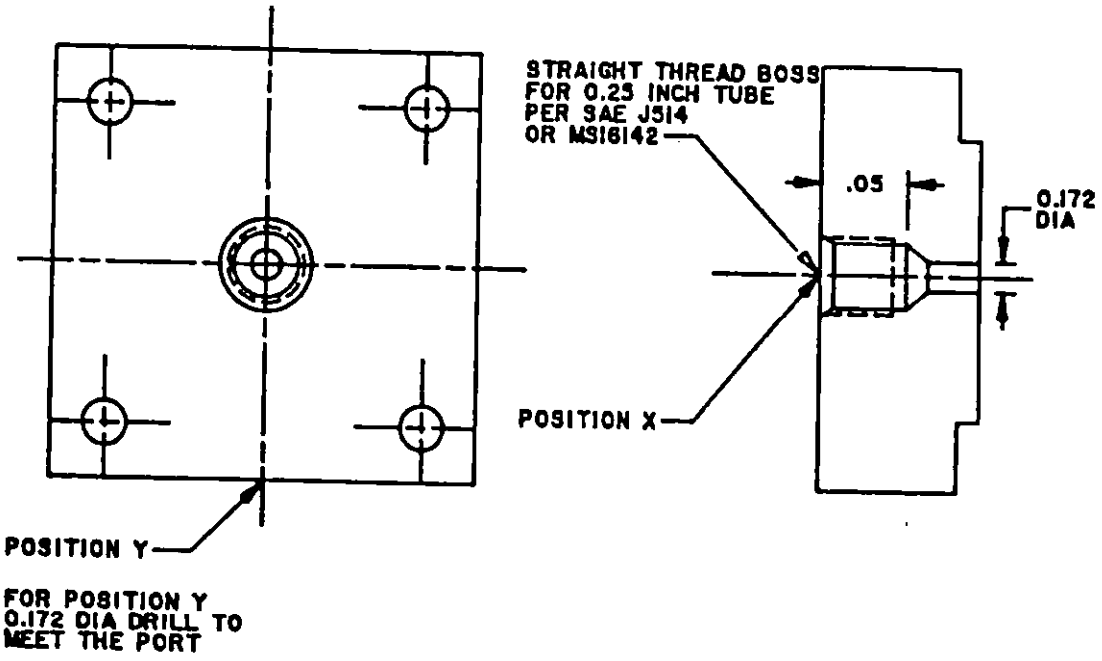

THE VENT PORT CAN BE LOCATED AT POSITION X OR Y FOR ALL FIGURE 1 FLANGES INSERT THE LETTER X OR Y AT THE APPROPRIATE LOCATION IN THE FLANGE PART NUMBER. FOR FLANGES WITHOUT VENT REQUIREMENT, INSERT THE LETTER W.

FIGURE 2. Blind flange vent location.

Preparing activity:
Navy - SH
(Project 4810-N082-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.