INCH-POUND
MIL-DTL-24704/4B(SH)
31 July 2019
SUPERSEDING
MIL-F-24704/4A(SH)
23 March 1992

DETAIL SPECIFICATION SHEET

FLANGES, FOUR-BOLT, SQUARE, BLIND, FOR HYDRAULIC SYSTEMS

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24704.

Scope. This specification sheet covers the requirements for four-bolt square blind flanges for use in 3,000 pounds per square inch (lb/in^2) hydraulic systems.

Part or identifying number (PIN). PINs to be used for blind flanges acquired to this specification are created as follows:

M	24704	/4	X	X	X	X
Specification prefix	Specification number	Specification sheet number	Flange style code ("B")	Flange (square) size code (see table I)	Material code (see table II)	Vent requirement designation (see figure 2)

Example: The PIN for a blind flange for tubing or nominal pipe size (NPS) piping, flange size 1.5 inches square, made of type 316 corrosion-resistant steel (CRES), with a vent located at position X would be written as M24704/4BACX.

Flange style. The flange style designation "B" indicates that the flange is a blind flange for tubing or NPS piping.


Flange (square) size. The square size of the flange shall be designated by a letter as specified in table I (see figure 1 for a listing of compatible flange sizes).

TABLE I. Flange (square) sizes.

Code	Square size (inches)
A	1.50
B	1.75
C	2.00
D	2.25
E	2.75
F	3.50
G	4.25

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.

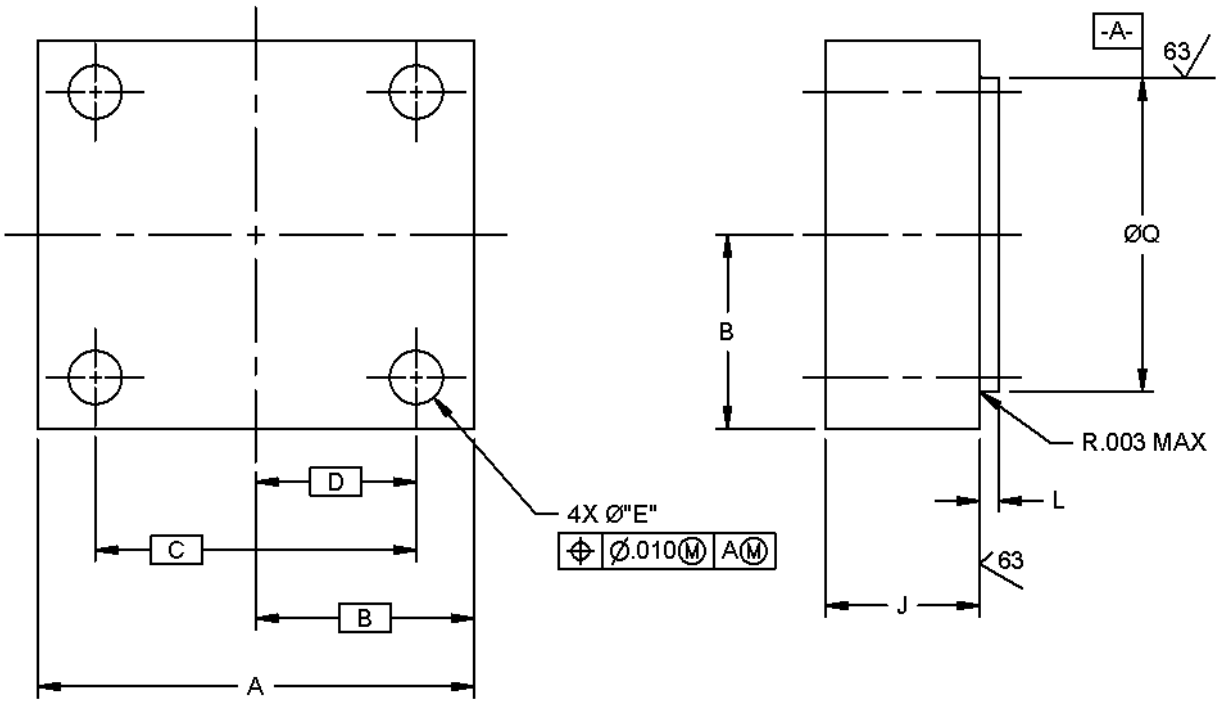

#	Flange size (inches)	A (square)	B	C (square)	D	E ±0.010	J	L +0.002 -0.000	Q +0.000 -0.002
A	1.50	1.50	0.75	0.938	0.469	0.281	0.466	0.062	0.487
B	1.75	1.75	0.88	1.125	0.562	0.344	0.466	0.062	0.687
C	2.00	2.00	1.00	1.312	0.656	0.406	0.466	0.062	0.999
D	2.25	2.25	1.12	1.500	0.750	0.469	0.720	0.062	1.187
E	2.75	2.75	1.38	1.875	0.938	0.469	0.782	0.125	1.437
F	3.50	3.50	1.75	2.500	1.250	0.531	1.157	0.125	2.124
G	4.25	4.25	2.12	3.062	1.531	0.656	1.250	0.125	2.374

NOTES:

1. Unless otherwise specified herein or in 6.2 of the base specification (MIL-DTL-24704):
   a. Surface roughness shall not exceed 125 microinches.
   b. Tolerances shall be:
      (1) X.XXX: ±0.015
      (2) X.XX: ±0.03
   c. Edges and corners shall be broken to a radius of 0.005 inch to 0.015 inch.
2. PIN --- M24704/4B#xx (# selected from above).

FIGURE 1. Blind flange.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.

Material. The flange material shall be designated as specified in table II.

TABLE II. Flange material.

Code	Flange material
C	CRES 304 (UNS S30400) or 316 (UNS S31600) in accordance with ASTM A276/A276M, ASTM A473, or SAE-AMS-QQ-S-763.
L	CRES 304L (UNS S30403) or 316L (UNS S31603) in accordance with ASTM A276/A276M, ASTM A473, or SAE-AMS-QQ-S-763.
N	Nickel-copper alloy in accordance with QQ-N-281, class A, or ASTM B127 (UNS N04400 only).

Vent requirement. The vent requirement shall be designated by the letter X or Y, as indicated on figure 2. For flanges without a vent, the letter W shall be used. Machining for the vent port shall be as shown on figure 2.

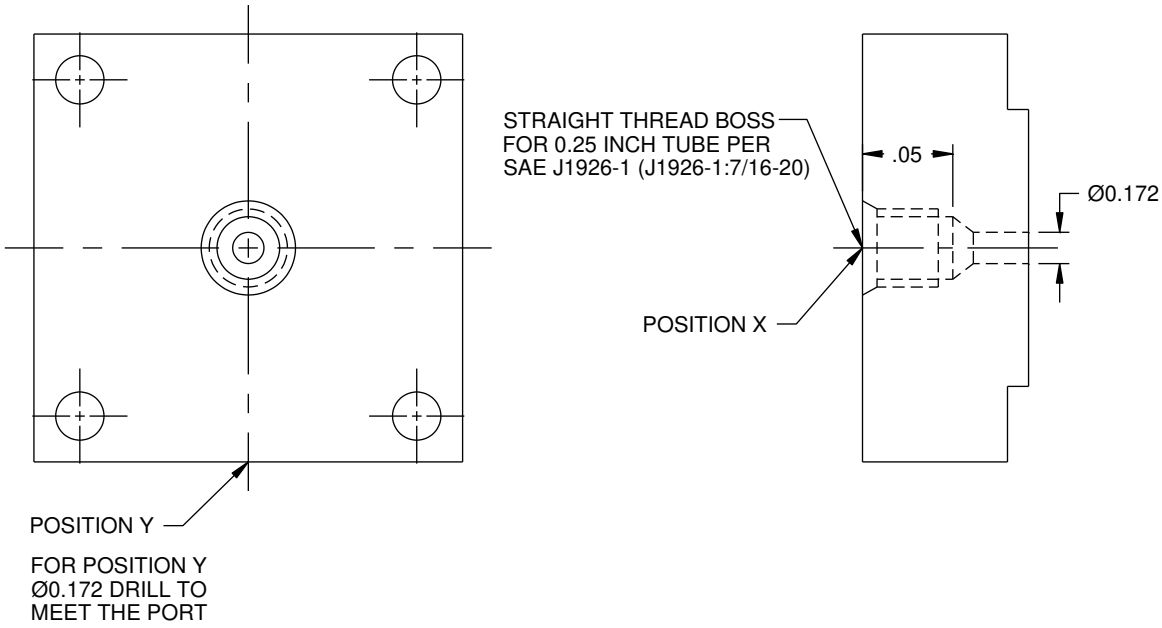


FIGURE 2. Blind flange vent location.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Preparing activity:
Navy − SH
(Project 4810-2019-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.