INCH-POUND
MIL-DTL-24704/5B(SH)
31 July 2019
SUPERSEDING
MIL-F-24704/5A(SH)
23 March 1992

DETAIL SPECIFICATION SHEET

# INSERT SLEEVES, FOR FOUR-BOLT SQUARE FLANGES, FOR HYDRAULIC SYSTEMS

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24704.

Scope. This specification sheet covers the requirements for insert sleeves for use with four-bolt square flanges for use in 3,000 pounds per square inch ($lb/in^2$) hydraulic systems.

Part or identifying number (PIN). PINs to be used for insert sleeves acquired to this specification are created as follows:

| M | 24704 | /5 | X | X |
|---|---|---|---|---|
| Specification prefix | Specification number | Specification sheet number | Insert sleeve size code (see figure 1) | Material code (see table I) |


Example: The PIN for an insert sleeve for a flange size of 1.5 inches square made of aluminum alloy 6061 (UNS A96061), temper T6, would be written as M24704/5AA.



DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.

Insert sleeve size. The insert sleeve shall be designated by a letter as indicated on figure 1.

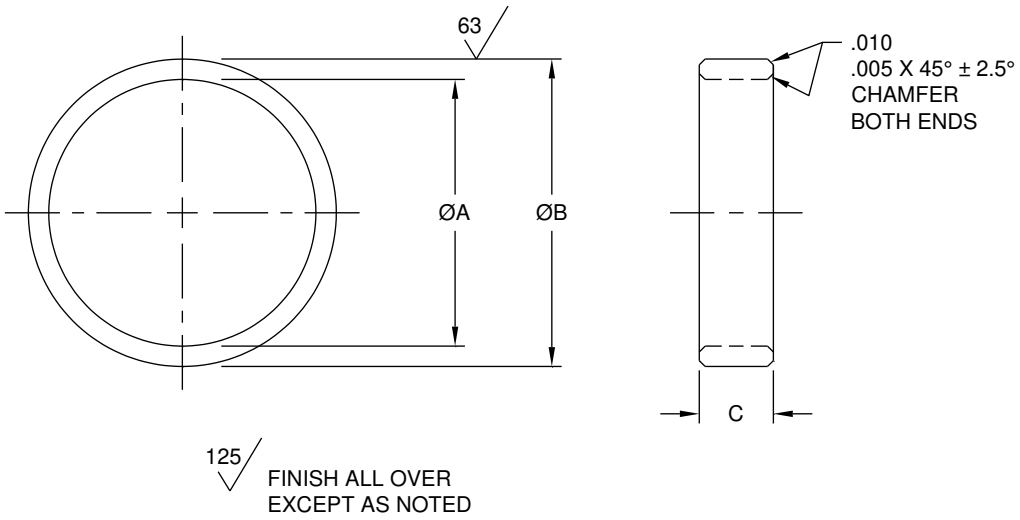


| Sleeve code | A +0.005 -0.000 | B +0.000 -0.002 | C +0.000 -0.010 | For use on | |
|---|---|---|---|---|---|
| | | | | Flange size | Flange code |
| A | 0.215 | 0.281 | 0.187 | 1.50 | A |
| B | 0.375 | 0.442 | 0.187 | 1.75 | B |
| C | 0.625 | 0.692 | 0.250 | 2.00 | C |
| D | 0.812 | 0.880 | 0.250 | 2.25 | D |
| E | 1.000 | 1.067 | 0.250 | 2.75 | E |
| F | 1.500 | 1.567 | 0.375 | 3.50 | F |
| G | 1.688 | 1.817 | 0.375 | 4.25 | G |
| H | 2.125 | 2.448 | 0.375 | 5.75 | H |
| NOTE: All dimensions are in inches. | | | | | |

FIGURE 1. Insert sleeve.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.

Material. The insert sleeve material shall be designated as specified in table I.

TABLE I. Insert sleeve material.

| Code | Insert sleeve material |
|---|---|
| A | Aluminum alloy 6061 (UNS A96061), temper T6, in accordance with ASTM B221, ASTM B241/B241M, or ASTM B211. |
| C | CRES 304 (UNS S30400) or 316 (UNS S31600) in accordance with ASTM A276/A276M, ASTM A473, or SAE-AMS-QQ-S-763. |

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Preparing activity:
Navy – SH
(Project 4810-2019-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:09Z
Check the source to verify that this is the current version before use.