INCH-POUND
MIL-DTL-24705/1B(SH)
23 August 2010
SUPERSEDING
MIL-P-24705/1A(SH)
19 July 1992

DETAIL SPECIFICATION SHEET

PENETRATORS, MULTIPLE CABLE, ELECTRIC CABLE, RECTANGULAR METAL FRAME, SQUARE-FACED BLOCKS

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and MIL-DTL-24705.

RECTANGULAR MULTIPLE CABLE PENETRATORS.

Rectangular multiple cable penetrator assembly (figure 1). Components required for each complete rectangular metal frame multiple cable penetrator assembly specified by this specification sheet shall be:

a. One rectangular metal frame with associated hardware (see figure 2).
b. The appropriate end-packing assembly and compression plate and all hardware (see figures 3, 4, 5, 6, and 7).
c. Stay plates (see figure 8 or 9 as required, one for each block layer).
d. Square-faced cable insert blocks, blanking insert blocks, and filler inserts to fill the interior of the rectangular frame (see figures 10, 11, and 12).

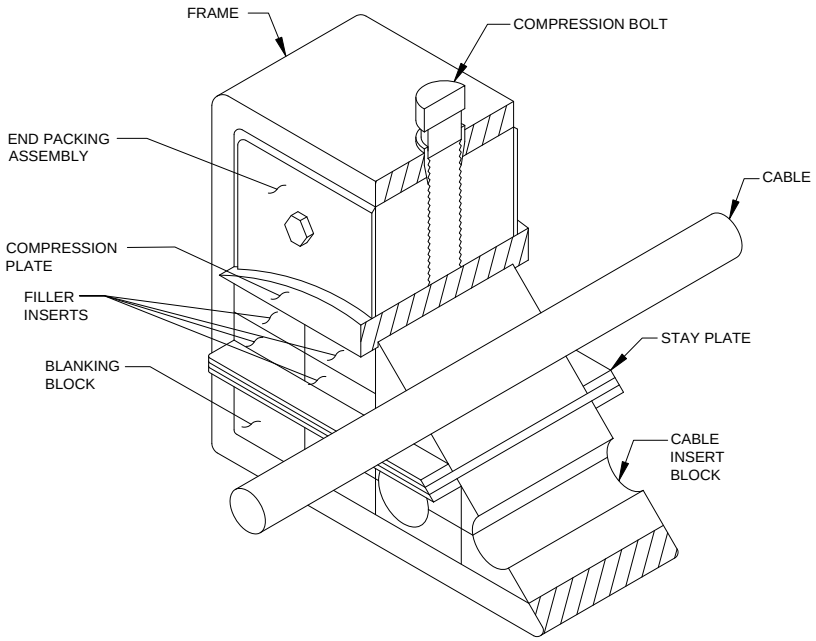


FIGURE 1. Rectangular multiple cable penetrator, assembled view – typical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

ASSOCIATED COMPONENTS AND THEIR PART OR IDENTIFYING NUMBERS (PINS).

NOTES:

1. Dimensions are in millimeters.
2. Inch equivalents are based on 25.4 millimeters equal to one inch and all are given in parenthesis for general information only.
3. Unless otherwise specified herein, tolerances are ±0.5 mm (±0.02).
4. Unless otherwise specified herein, tolerances for molded rubber parts shall be in accordance with the commercial tolerance (A3) specified in MIL-HDBK-149, Standard Dimensional Tolerances - Molded Solid Rubber Products.
5. All threads shall be in English dimensions. No metric threads shall be supplied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

FRAMES. The construction of metal rectangular multiple cable penetrator frames shall be in accordance with figure 2, and the dimensions specified in table I.

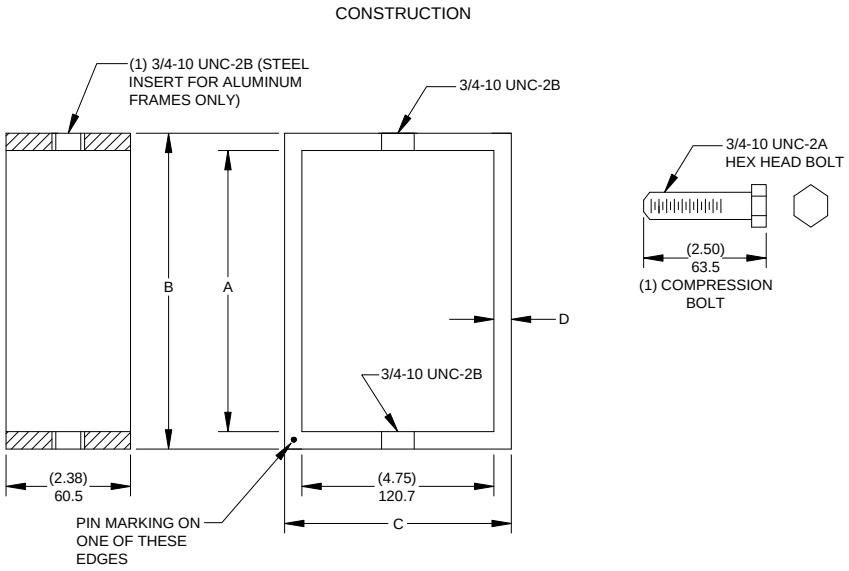


FIGURE 2. Rectangular frame with associated hardware.

TABLE I. Rectangular frame dimensions.

Designator	A	B	C	D
FA2	100.8 (3.97)	126.2 (4.97)	146.3 (5.76)	12.7 (0.50)
FA4	159.5 (6.28)	184.9 (7.28)	146.3 (5.76)	12.7 (0.50)
FA6	218.2 (8.59)	243.6 (9.59)	146.3 (5.76)	12.7 (0.50)
FA8	277.1 (10.91)	302.5 (11.91)	146.3 (5.76)	12.7 (0.50)
FC2, FS2	100.8 (3.97)	119.9 (4.72)	140.0 (5.51)	9.6 (0.38)
FC4, FS4	159.5 (6.28)	178.6 (7.03)	140.0 (5.51)	9.6 (0.38)
FC6, FS6	218.2 (8.59)	237.2 (9.34)	140.0 (5.51)	9.6 (0.38)
FC8, FS8	277.1 (10.91)	296.2 (11.66)	140.0 (5.51)	9.6 (0.38)

Part or identifying number (PIN) for frame. Frames are differentiated by an item designation consisting of a single digit corresponding to a particular size. An example of a frame PIN is provided below (see MIL-DTL-24705 for complete details).

M	**24705**	**/1**	**-**	**F**	**A**	**4**
Prefix for Military Specification	Specification Number	Spec Sheet No.		Item Type	Item Material	Item Designation

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

END-PACKING ASSEMBLY. End-packing assembly styles shall be as specified on figures 3, 4, and 5.

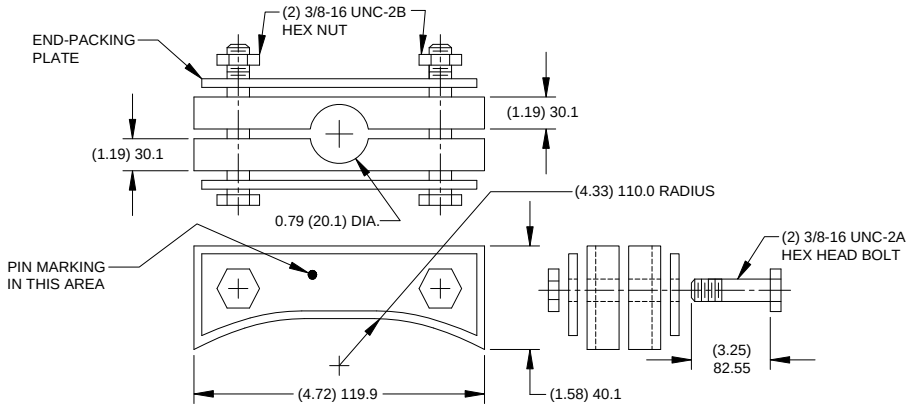


FIGURE 3. Style 1A end-packing assembly.

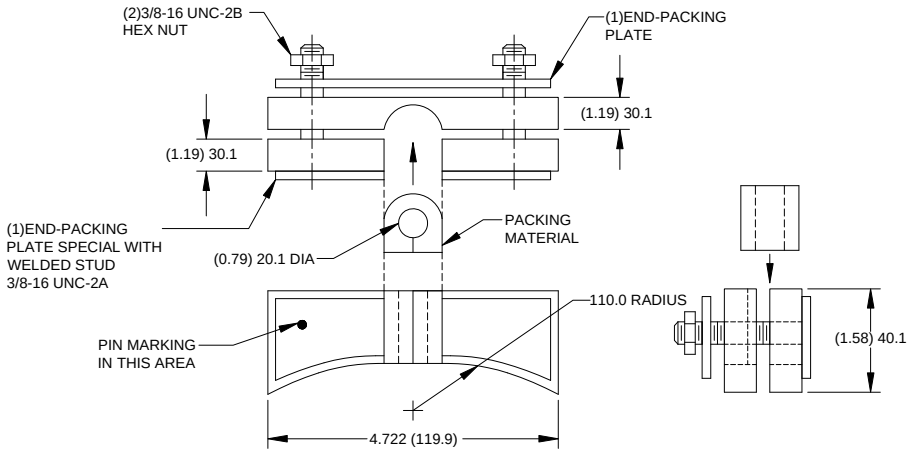


FIGURE 4. Style 1B end-packing assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

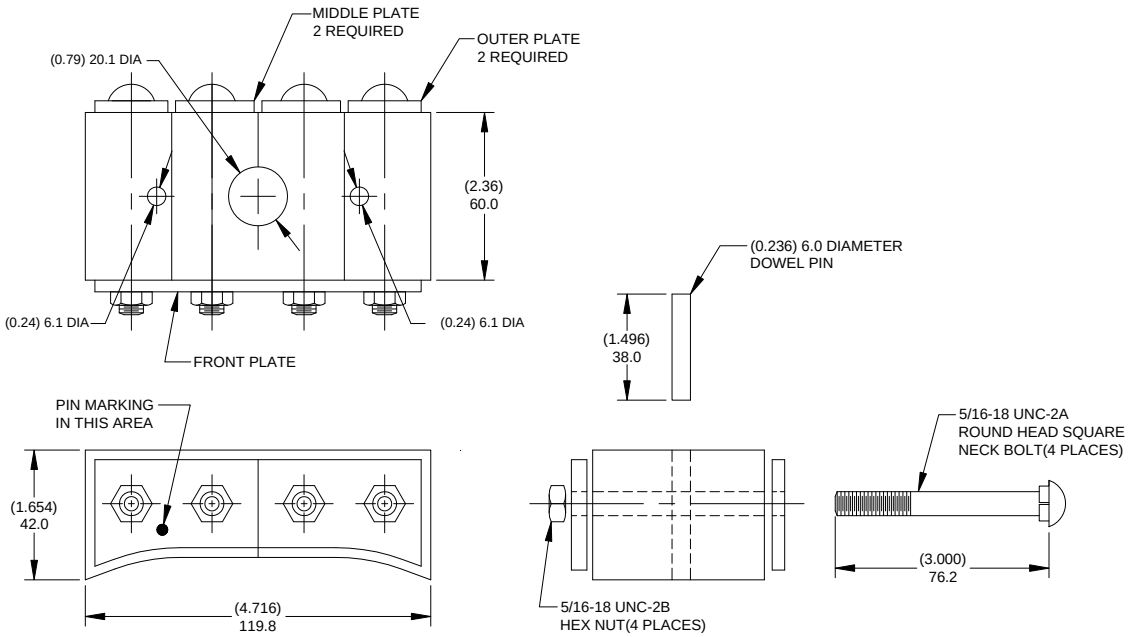


FIGURE 5. Style 2A end-packing assembly.


Part or identifying number (PIN) for end-packing assembly. End-packing assemblies are differentiated by an item designation consisting of a two alpha-numeric characters corresponding to a particular style. An example of an end-packing assembly PIN for style 2A end-packing with steel hardware is provided below (see MIL-DTL-24705 for complete details).

M	**24705**	**/1**	**-**	**A**	**S**	**2A**
Prefix for Military Specification	Specification Number	Spec Sheet No.		Item Type	Item Material	Item Designation

Material, end-packing assembly. The material specified for end-packing assemblies in the military designation pertains to hardware only. The material shall be designated as CRES (C) or steel (S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

COMPRESSION PLATE. Compression plate styles shall be as specified on figures 6 and 7.

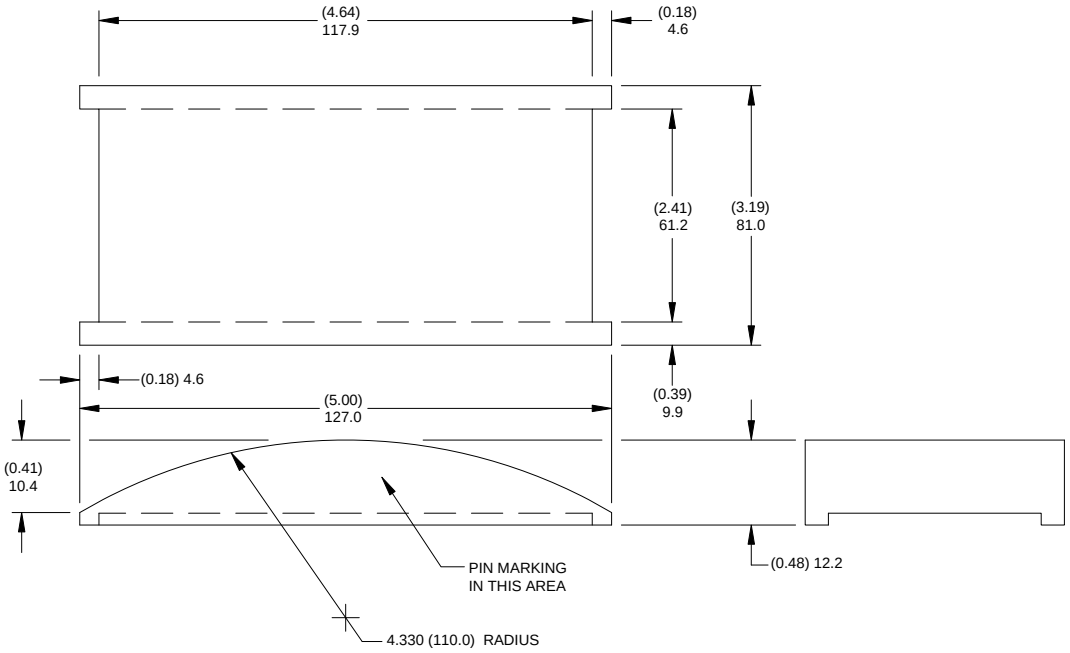

NOTE: The compression plate shall be provided with a means to restrain movement of the compression plate since compression takes place during assembly.

FIGURE 6. Compression plate for style 1A and 1B end-packing.

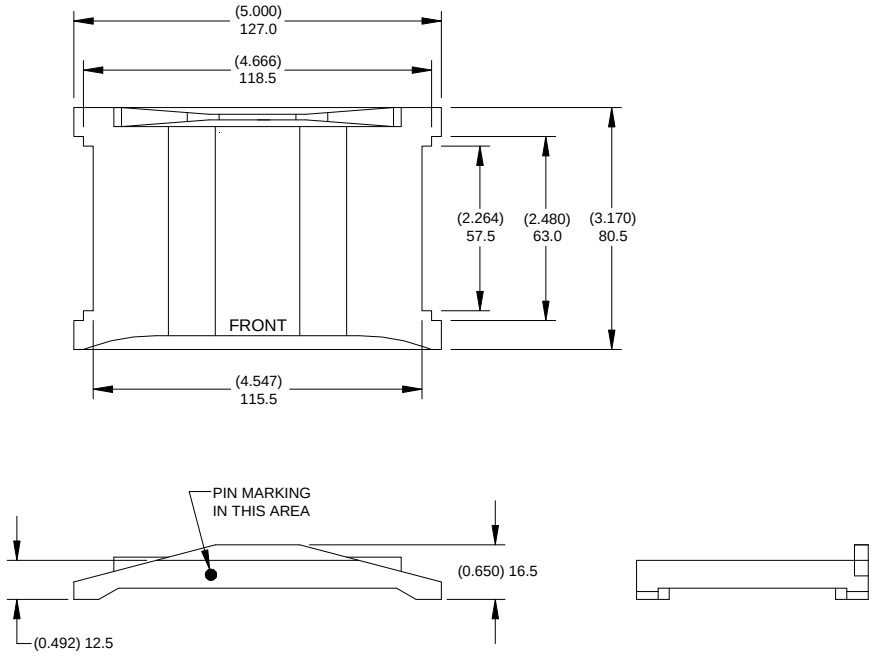


FIGURE 7. Compression plate for style 2A end-packing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

Part or identifying number (PIN) for compression plate. Compression plates are differentiated by an item designation consisting of a two alpha-numeric characters. Item designation 1A is used for both Style 1A and 1B end-packing, and item designation 2A for Style 2A end-packing. An example of a compression plate PIN for style 1B end-packing with CRES hardware is provided below (see MIL-DTL-24705 for complete details).

M	**24705**	**/1**	**-**	**C**	**C**	**1A**
Prefix for Military Specification	Specification Number	Spec Sheet No.		Item Type	Item Material	Item Designation

Material, end-packing assembly. The material specified for end-packing assemblies in the military designation pertains to hardware only. The material shall be designated as CRES (C) or steel (S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

STAY PLATE. Stay plate styles shall be as specified on figures 8 and 9.

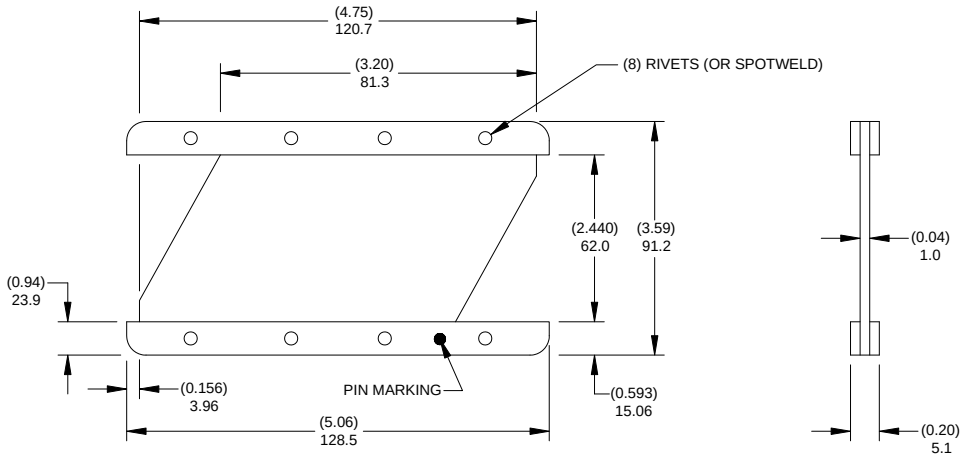


FIGURE 8. Style 1 stay plate.

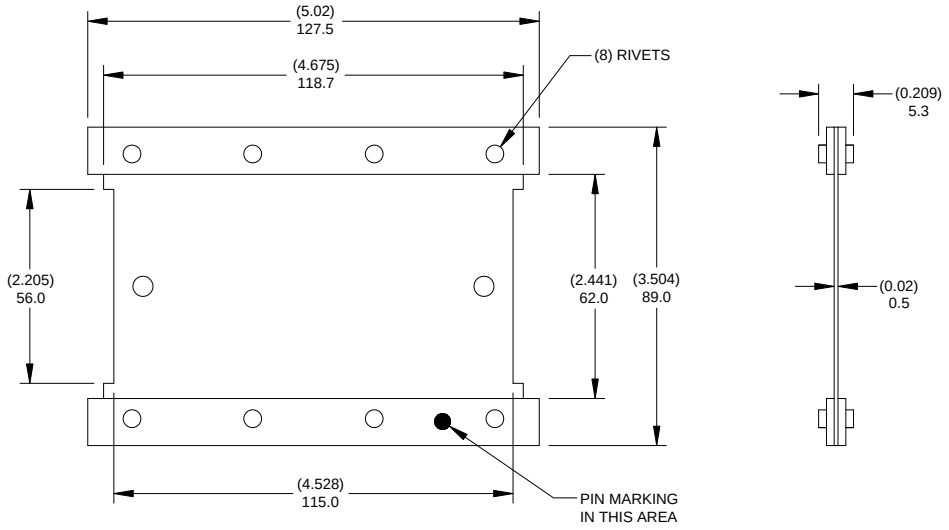


FIGURE 9. Style 2 stay plate.

Part or identifying number (PIN) for stay plate. The item designation consists of a single digit corresponding to a particular stay plate style (see figures 8 and 9). An example of a compression plate PIN for a style 2 steel stay plate is provided below (see MIL-DTL-24705 for complete details).

M	**24705**	**/1**	**-**	**S**	**S**	**2**
Prefix for Military Specification	Specification Number	Spec Sheet No.		Item Type	Item Material	Item Designation

Materials, stay plate. The material specified for stay plates in the military designation shall be aluminum (A), brass (B), CRES (C), or steel (S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

TWO-PIECE SQUARE-FACED CABLE INSERT BLOCK. Two-piece square-faced cable insert blocks shall be in accordance with figure 10 and the dimensions specified in tables II and III.

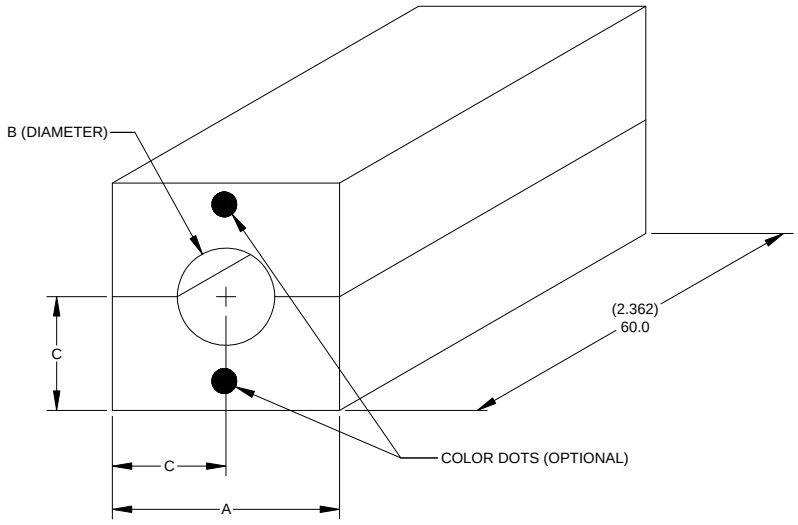


FIGURE 10. Two-piece square-faced cable insert block.

NOTE: Alternate construction for two-piece square-faced insert block. For BN80 and larger, the two individual blocks may be molded as one piece and slit on one side for convenience in assembly.

TABLE II. Two-piece square-faced cable insert block dimensions (exterior width 15 – 90 mm).

Designator	A	B		C	Color dots
BN1503/05	15.0 (0.59)	4.02 (0.16)	5.0 (0.20)	7.5 (0.30)	Red
BN1504	15.0 (0.59)	4.0 (0.15)		7.5 (0.30)	---
BN1505	15.0 (0.59)	5.0 (0.20)		7.5 (0.30)	---
BN1505/07	15.0 (0.59)	6.03 (0.24)	7.0 (0.28)	7.5 (0.30)	White
BN1506	15.0 (0.59)	6.0 (0.24)		7.5 (0.30)	---
BN1507	15.0 (0.59)	7.0 (0.28)		7.5 (0.30)	---
BN1507/09	15.0 (0.59)	8.04 (0.32)	9.0 (0.35)	7.5 (0.30)	Blue
BN1508	15.0 (0.59)	8.0 (0.32)		7.5 (0.30)	---
BN1509	15.0 (0.59)	9.0 (0.35)		7.5 (0.30)	---
BN2003/06	20.0 (0.79)	4.02 (0.16)	6.0 (0.24)	10.0 (0.39)	Green
BN2004	20.0 (0.79)	4.0 (0.15)		10.0 (0.39)	---
BN2005	20.0 (0.79)	5.0 (0.20)		10.0 (0.39)	---
BN2006	20.0 (0.79)	6.0 (0.24)		10.0 (0.39)	---
BN2006/09	20.0 (0.79)	7.04 (0.28)	9.0 (0.35)	10.0 (0.39)	Pink
BN2007	20.0 (0.79)	7.0 (0.28)		10.0 (0.39)	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

TABLE II. Two-piece square-faced cable insert block dimensions (exterior width 15 – 90 mm) - Continued.

Designator	A	B		C	Color dots
BN2008	20.0 (0.79)	8.0 (0.32)		10.0 (0.39)	---
BN2009	20.0 (0.79)	9.0 (0.35)		10.0 (0.39)	---
BN2009/12	20.0 (0.79)	10.05 (0.4)	12 (0.47)	10.0 (0.39)	Brown
BN2010	20.0 (0.79)	10.0 (0.4)		10.0 (0.39)	---
BN2011	20.0 (0.79)	11.0 (0.43)		10.0 (0.39)	---
BN2012	20.0 (0.79)	12.0 (0.47)		10.0 (0.39)	---
BN2013	20.0 (0.79)	13.0 (0.51)		10.0 (0.39)	---
BN2013/16	20.0 (0.79)	14.07 (0.55)	16 (0.63)	10.0 (0.39)	Gold
BN2014	20.0 (0.79)	14.0 (0.55)		10.0 (0.39)	---
BN2015	20.0 (0.79)	15.0 (0.59)		10.0 (0.39)	---
BN2016	20.0 (0.79)	16.0 (0.63)		10.0 (0.39)	---
BN3012	30.0 (1.18)	12.0 (0.47)		15.0 (0.59)	---
BN3012/15	30.0 (1.18)	13.07 (0.52)	15 (0.59)	15.0 (0.59)	Red
BN3013	30.0 (1.18)	13.0 (0.51)		15.0 (0.59)	---
BN3014	30.0 (1.18)	14.0 (0.55)		15.0 (0.59)	---
BN3015	30.0 (1.18)	15.0 (0.59)		15.0 (0.59)	---
BN3015/18	30.0 (1.18)	16.08 (0.63)	18 (0.71)	15.0 (0.59)	White
BN3016	30.0 (1.18)	16.0 (0.63)		15.0 (0.59)	---
BN3017	30.0 (1.18)	17.0 (0.67)		15.0 (0.59)	---
BN3018	30.0 (1.18)	18.0 (0.71)		15.0 (0.59)	---
BN3018/21	30.0 (1.18)	19.10 (0.75)	21 (0.83)	15.0 (0.59)	Blue
BN3019	30.0 (1.18)	19.0 (0.75)		15.0 (0.59)	---
BN3020	30.0 (1.18)	20.0 (0.79)		15.0 (0.59)	---
BN3021	30.0 (1.18)	21.0 (0.83)		15.0 (0.59)	---
BN3021/24	30.0 (1.18)	22.11 (0.87)	24 (0.95)	15.0 (0.59)	Orange
BN3022	30.0 (1.18)	22.0 (0.87)		15.0 (0.59)	---
BN3023	30.0 (1.18)	23.0 (0.91)		15.0 (0.59)	---
BN3024	30.0 (1.18)	24.0 (0.95)		15.0 (0.59)	---
BN3025	30.0 (1.18)	25.0 (0.98)		15.0 (0.59)	---
BN4022	40.0 (1.58)	22.0 (0.87)		20.0 (0.79)	---
BN4022/25	40.0 (1.58)	23.12 (0.91)	25 (0.98)	20.0 (0.79)	Red
BN4023	40.0 (1.58)	23.0 (0.91)		20.0 (0.79)	---
BN4024	40.0 (1.58)	24.0 (0.95)		20.0 (0.79)	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

TABLE II. Two-piece square-faced cable insert block dimensions (exterior width 15 – 90 mm) - Continued.

Designator	A	B		C	Color dots
BN4025	40.0 (1.58)	25.0 (0.98)		20.0 (0.79)	---
BN4025/28	40.0 (1.58)	26.13 (1.03)	28 (1.10)	20.0 (0.79)	White
BN4026	40.0 (1.58)	26.0 (1.02)		20.0 (0.79)	---
BN4027	40.0 (1.58)	27.0 (1.06)		20.0 (0.79)	---
BN4028	40.0 (1.58)	28.0 (1.10)		20.0 (0.79)	---
BN4028/31	40.0 (1.58)	29.15 (1.15)	31 (1.22)	20.0 (0.79)	Blue
BN4029	40.0 (1.58)	29.0 (1.14)		20.0 (0.79)	---
BN4030	40.0 (1.58)	30.0 (1.18)		20.0 (0.79)	---
BN4031	40.0 (1.58)	31.0 (1.22)		20.0 (0.79)	---
BN4031/34	40.0 (1.58)	32.16 (1.27)	34 (1.34)	20.0 (0.79)	Orange
BN4032	40.0 (1.58)	32.0 (1.26)		20.0 (0.79)	---
BN4033	40.0 (1.58)	33.0 (1.30)		20.0 (0.79)	---
BN4034	40.0 (1.58)	34.0 (1.34)		20.0 (0.79)	---
BN4035	40.0 (1.58)	35.0 (1.38)		20.0 (0.79)	---
BN6031/34	60.0 (2.36)	32.16 (1.27)	34 (1.34)	30.0 (1.18)	Red
BN6032	60.0 (2.36)	32.0 (1.26)		30.0 (1.18)	---
BN6033	60.0 (2.36)	33.0 (1.30)		30.0 (1.18)	---
BN6034	60.0 (2.36)	34.0 (1.34)		30.0 (1.18)	---
BN6034/37	60.0 (2.36)	35.18 (1.39)	37 (1.46)	30.0 (1.18)	White
BN6035	60.0 (2.36)	35.0 (1.38)		30.0 (1.18)	---
BN6036	60.0 (2.36)	36.0 (1.42)		30.0 (1.18)	---
BN6037	60.0 (2.36)	37.0 (1.46)		30.0 (1.18)	---
BN6037/40	60.0 (2.36)	38.19 (1.50)	40 (1.58)	30.0 (1.18)	Blue
BN6038	60.0 (2.36)	38.0 (1.50)		30.0 (1.18)	---
BN6039	60.0 (2.36)	39.0 (1.54)		30.0 (1.18)	---
BN6040	60.0 (2.36)	40.0 (1.58)		30.0 (1.18)	---
BN6040/43	60.0 (2.36)	41.21 (1.62)	43 (1.69)	30.0 (1.18)	Orange
BN6041	60.0 (2.36)	41.0 (1.61)		30.0 (1.18)	---
BN6042	60.0 (2.36)	42.0 (1.65)		30.0 (1.18)	---
BN6043	60.0 (2.36)	43.0 (1.69)		30.0 (1.18)	---
BN6043/46	60.0 (2.36)	44.22 (1.74)	46 (1.81)	30.0 (1.18)	Purple
BN6044	60.0 (2.36)	44.0 (1.74)		30.0 (1.18)	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

TABLE II. Two-piece square-faced cable insert block dimensions (exterior width 15 – 90 mm) - Continued.

Designator	A	B		C	Color dots
BN60.45	60.0 (2.36)	45.0 (1.77)		30.0 (1.18)	---
BN6046	60.0 (2.36)	46.0 (1.81)		30.0 (1.18)	---
BN6046/49	60.0 (2.36)	47.24 (1.86)	49 (1.93)	30.0 (1.18)	Yellow
BN6047	60.0 (2.36)	47.0 (1.85)		30.0 (1.18)	---
BN6048	60.0 (2.36)	48.0 (1.89)		30.0 (1.18)	---
BN6049	60.0 (2.36)	49.0 (1.93)		30.0 (1.18)	---
BN6049/52	60.0 (2.36)	50.25 (1.98)	52 (2.05)	30.0 (1.18)	Green
BN6050	60.0 (2.36)	50.0 (1.97)		30.0 (1.18)	---
BN6051	60.0 (2.36)	51.0 (2.01)		30.0 (1.18)	---
BN6052	60.0 (2.36)	52.0 (2.05)		30.0 (1.18)	---
BN6053	60.0 (2.36)	53.0 (2.09)		30.0 (1.18)	---
BN6054	60.0 (2.36)	54.0 (2.13)		30.0 (1.18)	---
BN6054/56	60.0 (2.36)	54.61 (2.15)	56 (2.21)	30.0 (1.18)	Pink
BN6055	60.0 (2.36)	55.0 (2.17)		30.0 (1.18)	---
BN8054	80.0 (3.15)	54.0 (2.13)		40.0 (1.58)	---
BN8056	80.0 (3.15)	56.0 (2.21)		40.0 (1.58)	---
BN8058	80.0 (3.15)	58.0 (2.28)		40.0 (1.58)	---
BN8060	80.0 (3.15)	60.0 (2.36)		40.0 (1.58)	---
BN8062	80.0 (3.15)	62.0 (2.44)		40.0 (1.58)	---
BN8064	80.0 (3.15)	64.0 (2.52)		40.0 (1.58)	---
BN8066	80.0 (3.15)	66.0 (2.60)		40.0 (1.58)	---
BN8068	80.0 (3.15)	68.0 (2.68)		40.0 (1.58)	---
BN8070	80.0 (3.15)	70.0 (2.76)		40.0 (1.58)	---
BN9050	90.0 (3.54)	50.0 (1.97)		45.0 (1.77)	---
BN9051	90.0 (3.54)	51.0 (2.01)		45.0 (1.77)	---
BN9052	90.0 (3.54)	52.0 (2.05)		45.0 (1.77)	---
BN9053	90.0 (3.54)	53.0 (2.09)		45.0 (1.77)	---
BN9053/56	90.0 (3.54)	54.27 (2.14)	56 (2.21)	45.0 (1.77)	Red
BN9054	90.0 (3.54)	54.0 (2.13)		45.0 (1.77)	---
BN9055	90.0 (3.54)	55.0 (2.17)		45.0 (1.77)	---
BN9056	90.0 (3.54)	56.0 (2.21)		45.0 (1.77)	---
BN9056/59	90.0 (3.54)	57.29 (2.26)	59 (2.32)	45.0 (1.77)	White
BN9057	90.0 (3.54)	57.0 (2.24)		45.0 (1.77)	---
BN9058	90.0 (3.54)	58.0 (2.28)		45.0 (1.77)	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

TABLE II. Two-piece square-faced cable insert block dimensions (exterior width 15 – 90 mm) - Continued.

Designator	A	B		C	Color dots
BN9059	90.0 (3.54)	59.0 (2.32)		45.0 (1.77)	---
BN9059/62	90.0 (3.54)	60.30 (2.37)	62 (2.44)	45.0 (1.77)	Blue
BN9060	90.0 (3.54)	60.0 (2.36)		45.0 (1.77)	---
BN9061	90.0 (3.54)	61.0 (2.40)		45.0 (1.77)	---
BN9062	90.0 (3.54)	62.0 (2.44)		45.0 (1.77)	---
BN9062/65	90.0 (3.54)	63.32 (2.49)	65 (2.56)	45.0 (1.77)	Orange
BN9063	90.0 (3.54)	63.0 (2.48)		45.0 (1.77)	---
BN9064	90.0 (3.54)	64.0 (2.42)		45.0 (1.77)	---
BN9065	90.0 (3.54)	65.0 (2.56)		45.0 (1.77)	---
BN9065/68	90.0 (3.54)	66.33 (2.61)	68 (2.68)	45.0 (1.77)	Purple
BN9066	90.0 (3.54)	66.0 (2.60)		45.0 (1.77)	---
BN9067	90.0 (3.54)	67.0 (2.64)		45.0 (1.77)	---
BN9068	90.0 (3.54)	68.0 (2.68)		45.0 (1.77)	---
BN9068/71	90.0 (3.54)	69.35 (2.73)	71 (2.79)	45.0 (1.77)	Yellow
BN9069	90.0 (3.54)	69.0 (2.72)		45.0 (1.77)	---
BN9070	90.0 (3.54)	70.0 (2.76)		45.0 (1.77)	---

Part or identifying number (PIN) for two-piece square-faced cable insert blocks with an exterior width of 15 mm – 90 mm. The item designation for BN15 through BN90 square-faced cable insert blocks shall be differentiated by an item designation consisting of the following format “xxxx/xx”. The first two digits indicate the exterior width of the cable insert block in millimeters (mm). If the cable passage diameter is fixed, the next two digits indicate the passage diameter of the cable insert block in mm, and the remaining digits are not used. If the block has an adjustable cable passage diameter (indicated by “COLOR DOTS”), the two digits before the “/” shall indicate the minimum passage diameter in mm, and the two digits after the “/” shall indicate the maximum passage diameter in mm. An example of the PIN for a 15 mm – 90 mm two-piece square-faced cable insert block with an exterior width of 90 mm and an adjustable passage is provided below (see MIL-DTL-24705 for complete details).

M	**24705**	**/1**	**-**	**B**	**N**	**90**	**53**	**/**	**56**
Prefix for Military Specification	Specification Number	Spec Sheet No.		Item Type	Item Material	Exterior Width (mm)	Minimum Dia. (mm)		Maximum Dia. (mm)
						Item Designation			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

TABLE III. Two-piece square-faced cable insert block dimensions (exterior width 120 mm).

Designator	A	B		C	Color dots
BN12072/75	120.0 (4.72)	72.3 (2.85)	75.0 (2.95)	60.0 (2.36)	Red
BN12075	120.0 (4.72)	75.0 (2.95)		60.0 (2.36)	---
BN12075/78	120.0 (4.72)	76.0 (2.99)	78.0 (3.07)	60.0 (2.36)	White
BN12078/81	120.0 (4.72)	79.0 (3.11)	81.0 (3.19)	60.0 (2.36)	Blue
BN12080	120.0 (4.72)	80.0 (3.15)		60.0 (2.36)	---
BN12081/84	120.0 (4.72)	82.0 (3.23)	84.0 (3.31)	60.0 (2.36)	Orange
BN12084/87	120.0 (4.72)	85.0 (3.35)	87.0 (3.42)	60.0 (2.36)	Purple
BN12085	120.0 (4.72)	85.0 (3.35)		60.0 (2.36)	---
BN12087/90	120.0 (4.72)	88.0 (3.47)	90.0 (3.54)	60.0 (2.36)	Yellow
BN12090	120.0 (4.72)	90.0 (3.54)		60.0 (2.36)	---
BN12090/93	120.0 (4.72)	91.0 (3.58)	93.0 (3.66)	60.0 (2.36)	Green
BN12093/96	120.0 (4.72)	94.0 (3.70)	96.0 (3.78)	60.0 (2.36)	Pink
BN12095	120.0 (4.72)	95.0 (3.74)		60.0 (2.36)	---
BN12096/100	120.0 (4.72)	97.0 (3.82)	100.0 (3.94)	60.0 (2.36)	Brown
BN120100/103	120.0 (4.72)	101.0 (3.98)	103.0 (4.05)	60.0 (2.36)	Gold

Part or identifying number (PIN) for two-piece square-faced cable insert blocks with an exterior width of 120 mm or greater. The item designation for BN120 or greater square-faced cable insert blocks shall be differentiated by an item designation consisting of five to nine digits and a "/" after the fifth or sixth digit. The first three digits indicate the exterior width of the cable insert block in mm. If the cable passage diameter is fixed, the next two digits indicate the passage diameter of the cable insert block in mm, and the remaining digits are not used. If the block has an adjustable cable passage diameter (indicated by "COLOR DOTS"), the remaining digits before the "/" shall indicate the minimum passage diameter in mm and the digits after the "/" shall indicate the maximum passage diameter in mm. An example of a PIN for a 120 mm or greater two-piece square-faced cable insert block with an exterior width of 120 mm and an adjustable passage is provided below (see MIL-DTL-24705 for complete details).

M	**24705**	**/1**	**-**	**B**	**N**	**120**	**96**	**/**	**100**
Prefix for Military Specification	Specification Number	Spec Sheet No.		Item Type	Item Material	Exterior Width (mm)	Minimum Dia. (mm)		Maximum Dia. (mm)

Item Designation

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

BLANKING INSERT BLOCK. Blanking insert blocks shall be in accordance with figure 11 and the dimensions specified in table IV.

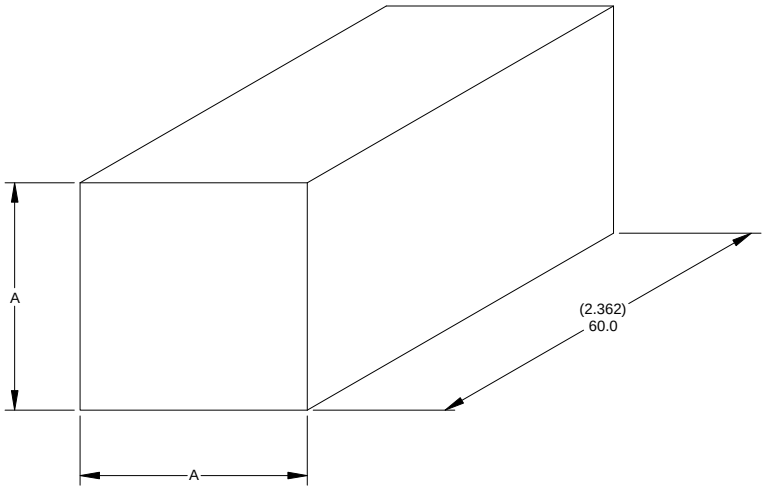


FIGURE 11. Blanking insert block.

TABLE IV. Blanking insert block dimensions.

Designator	A
BN10	10.0 (0.39)
BN15	15.0 (0.59)
BN20	20.0 (0.79)
BN30	30.0 (1.18)
BN40	40.0 (1.58)
BN60	60.0 (2.36)
BN80	80.0 (3.15)
BN90	90.0 (3.54)
BN120	120.0 (4.72)

Part or identifying number (PIN) for blanking insert blocks. The item designation for blanking insert blocks shall consist of two or three digits that indicate the exterior width of the blanking insert block in mm. If the blanking insert block is designed for a rounded corner, the item designation shall be followed by the item designation modifier "(RC)" to indicate a rounded corner with radius equal to the exterior width. An example of a PIN for a 30 mm wide blanking insert block designed for a rounded corner is provided below (see MIL-DTL-24705 for complete details).

M	**24705**	**/1**	**-**	**B**	**N**	**30**	**(RC)**
Prefix for Military Specification	Specification Number	Spec Sheet No.		Item Type	Item Material	Item Designation	Item Designation Modifier

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

FILLER INSERT. Filler inserts shall be in accordance with figure 12 and the dimensions specified in table V.

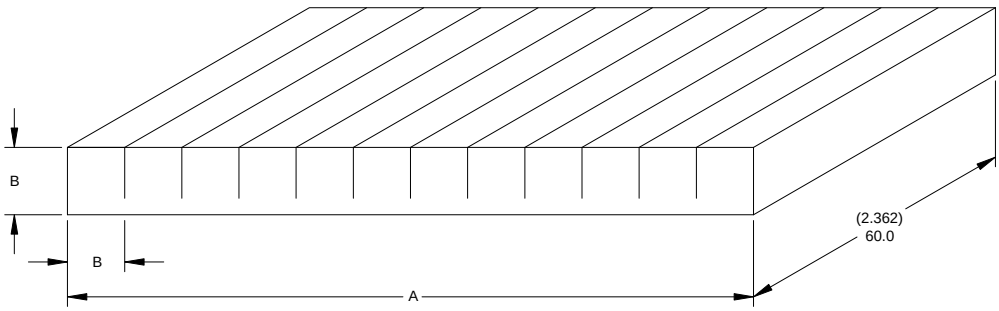


FIGURE 12. Filler insert.

TABLE V. Filler insert dimensions.

Designator	A	B
IN0005	120.0 (4.72)	5.0 (0.20)
IN0010	120.0 (4.72)	10.0 (0.39)
IN1210	120.0 (4.72)	10.0 (0.39)
IN2405	120.0 (4.72)	5.0 (0.20)

Part or identifying number (PIN) for filler insert. The item designation for filler inserts shall consist of four digits. The first two digits shall indicate the quantity of filler units provided in the filler insert piece, the last two digits shall indicate the filler insert height. For solid filler inserts, “00” shall be used for the first two digits to indicate a solid filler insert and the last two digits shall indicate the filler insert height. An example of a PIN for a 12 unit filler insert 10 mm high is provided below (see MIL-DTL-24705 for complete details).

M	**24705**	**/1**	**-**	**I**	**N**	**12**	**10**
Prefix for Military Specification	Specification Number	Spec Sheet No.		Item Type	Item Material	Units	Unit Height
						Item designation	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Design performance.

a.	Nonmagnetic	When specified (see MIL-DTL-24705)
b.	Durometer	65 to 87
c.	Compression	2 percent (max.)
d.	Expansion	1 percent (max.)
e.	Expansion inspection sample size	One BN60
f.	Fluid immersion	±5 percent change in durometer
g.	Fluid immersion inspection sample size	Three BN40
h.	IR signature	Informational
i.	IR signature inspection sample size	One BN60

Identification marking. Identification marking shall be required on 30 mm exterior width cable insert blocks and larger. Passage diameter shall not be required on blanking insert blocks. The block size number is not required for 15 mm or 20 mm blocks nor for blocks with large size passage diameters where marking space is not available. On filler inserts, item designation and manufacturers' name or logo shall be on the inserts, other markings are not required. Optional markings on cable insert blocks shall consist of color code dots for matching insert block halves of a selected module size, cable diameter range in mm, and manufacturers' catalog numbers.

Rectangular frame multiple cable penetrator test specimen (see figure 13). The components for the multiple cable penetrator test specimen shall be as specified below. Each component listed shall be required for each test specimen.

a.	Frame	1 - M24705/1F*6 (see table I) (The * represents item material. See qualification table in MIL-DTL-24705 for selection.)
b.	End-packing assembly	1 - M24705/1E*1 (see figure 3, 4, or 5) (The * represents item material. See qualification table in MIL-DTL-24705 for selection.)
c.	Compression plate	1 - M24705/1C* (see figure 6 or 7) (The * represents item material. See qualification table in MIL-DTL-24705 for selection.)
d.	Stay plate	3 - M24705/1S*2 (see figure 8 or 9) (The * represents item material. See qualification table in MIL-DTL-24705 for selection.)
e.	Two-piece square-faced cable insert blocks	2 - M24705/1BN20 insert block passage 1 - M24705/1BN30 diameter to suit 4 - M24705/1BN40 specified test cables 1 - M24705/1BN9053/56 3 - M24705/1BN30
f.	Blanking insert blocks	2 - M24705/1 BN30 1 - M24705/1BN40
g.	Filler inserts	1 - M24705/1IN0005
h.	Cables	2 - LSDSGU-4 2- LSFSGU-4 2 - LSMSCU-24 2 - LSMSCU-30 1 - LSMDU-6 1 - LSTSGA-400
i.	Lubricant	C-T-91

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.

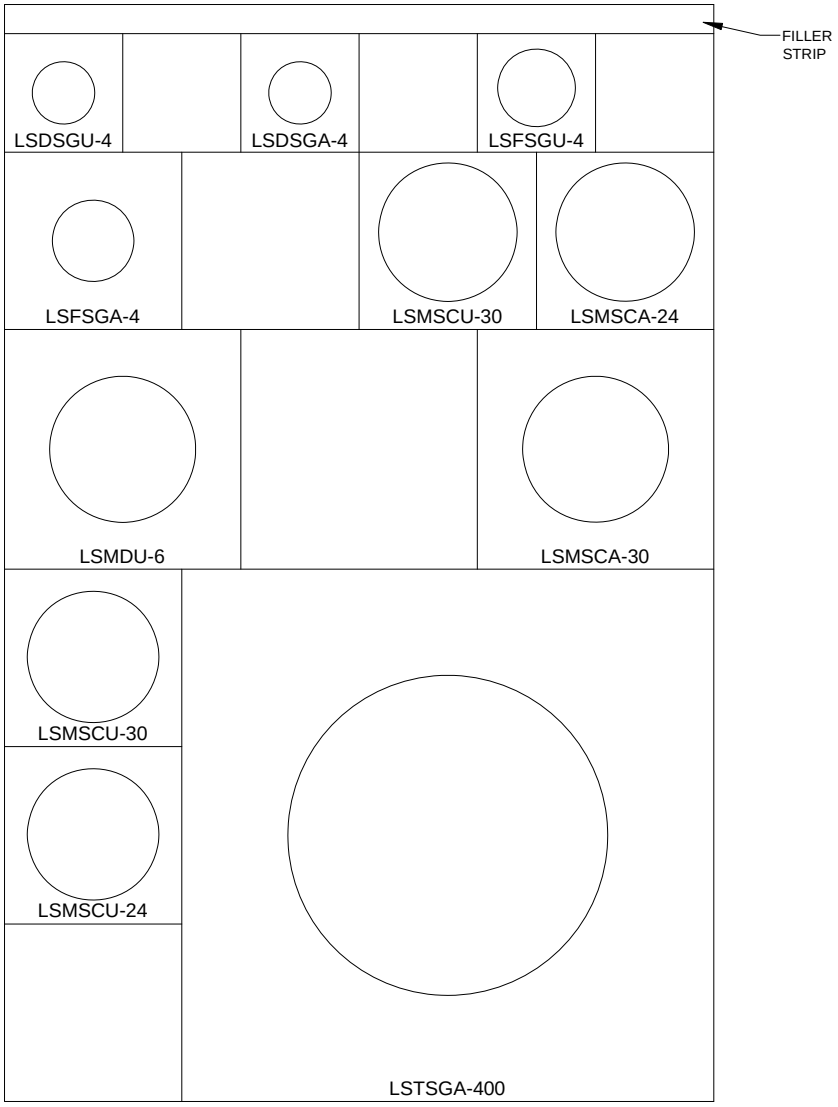


FIGURE 13. Rectangular frame multiple cable penetrator test specimen cable configuration.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy – SH

Preparing Activity:
Navy – SH
(Project 5975-2009-004)

Review Activity:
DLA – GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/online.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:10Z
Check the source to verify that this is the current version before use.