
METRIC
MIL-F-24702/1(SH)
28 April 1988

MILITARY SPECIFICATION SHEET

FILTER ELEMENTS, HYDRAULIC, DISPOSABLE (METRIC)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the filter elements described herein shall consist of this specification and the latest issue of MIL-F-24702.

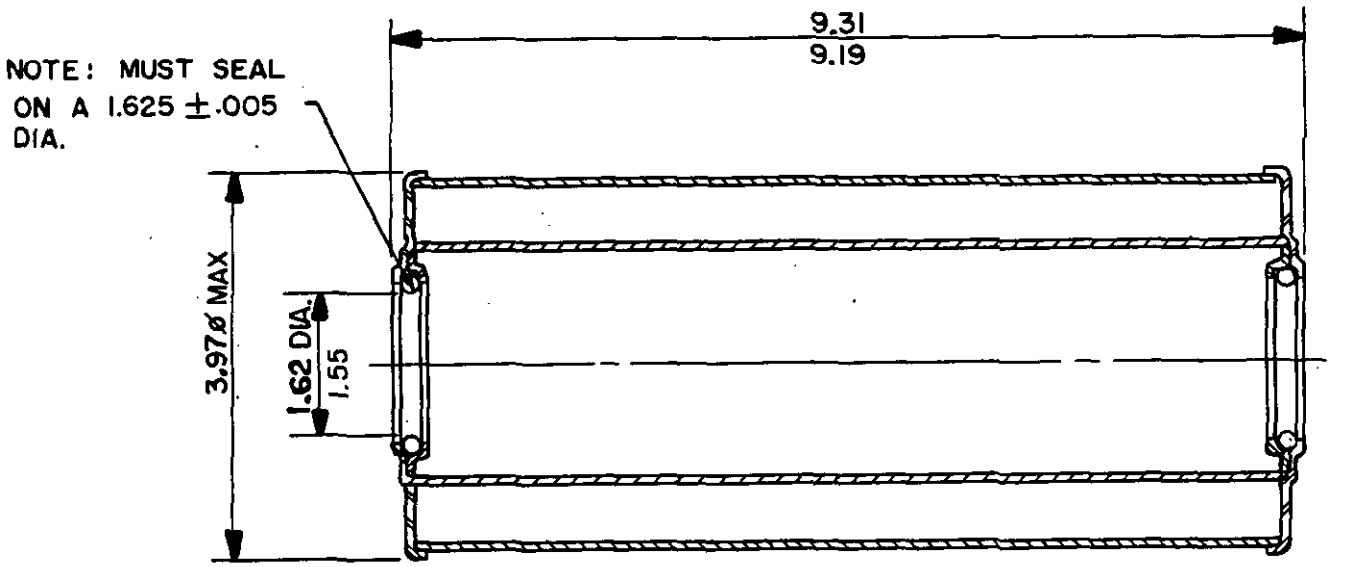

SH 132317632

FIGURE 1. Filter element.

NOTES:

1. Dimensions are in inches unless otherwise specified.
2. Material shall be in accordance with the general specification.
3. Seals shall be in accordance with MIL-R-83248 and MIL-R-83248/1, as applicable.
4. Quality conformance inspection for each element acquisition shall be in accordance with 4.4 of this specification.
5. Test fluid shall be with or without antistatic additives.
6. Test flow rate for the filtration performance test (4.7.2) shall be as specified in table I.

AMSC N/A FSC 4330

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-20T01:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Element:


1. The filter element shall be in accordance with figure 1.
2. Rated flow in accordance with MIL-H-17672, 2135 T-H fluid at 40°C temperature - see table I.
3. Minimum beta ratio - See table I.
4. Air clean fine test dust (A.C.F.T.D) capacity - 35 grams.
5. Terminal pressure drop - 40 lb/in^2 at rated flow.
6. Clean element pressure drop at rated flow and 68 centistoke (minimum) viscosity - 10 lb/in^2 maximum.
7. Collapse burst pressure - 150 lb/in^2 minimum.
8. Reverse flow pressure - 15 lb/in^2 minimum.
9. Bubble point - 6 inches of water minimum.
10. Flow fatigue cycles - 50,000 cycles.

TABLE I. Minimum beta ratio.

Beta size	Beta ratio min	Rated flow gal/min
B_{10}	75	30
B_5	25	20

Element Connector:

1. Element connector shall be in accordance with figure 2.
2. Material shall be nylon or equivalent.

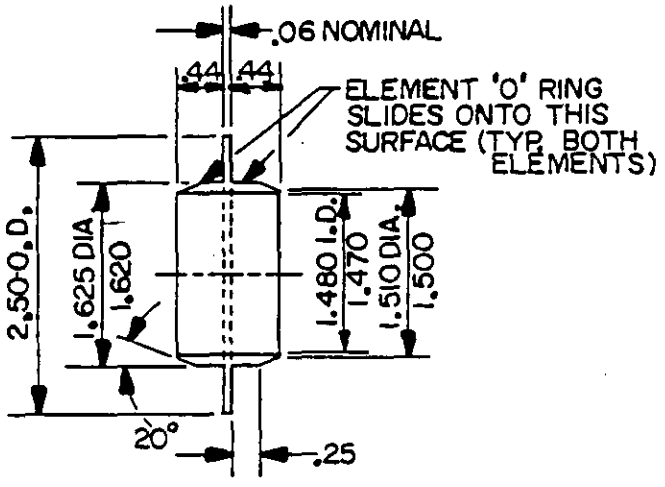

SH 13202951

FIGURE 2. Element connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:07Z
Check the source to verify that this is the current version before use.

PART NUMBER:

Filter Element:

The part number consists of the basic number of this specification sheet number plus applicable beta size and beta ratio number selected from table I.

Example:

M24702/1-B10-75 filter element with a beta ten ratio of 75 and a rated flow of 30 gallons per minute.

ELEMENT CONNECTOR: The part number consists of the basic number of this specification sheet number plus letter "C" for the connector. Example: M24702/1-C filter element connector.

Preparing activity:
Navy - SH
(Project 4330-N046-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:07Z
Check the source to verify that this is the current version before use.