INCH-POUND
MIL-F-24702/1A(SH)
5 April 1993
SUPERSEDING
MIL-F-24702/1(SH)
28 April 1988

MILITARY SPECIFICATION SHEET

FILTER ELEMENTS, HYDRAULIC, DISPOSABLE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use for by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the filter elements described herein shall consist of this specification sheet and the issue of the following specification listed "in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-24702(SH)

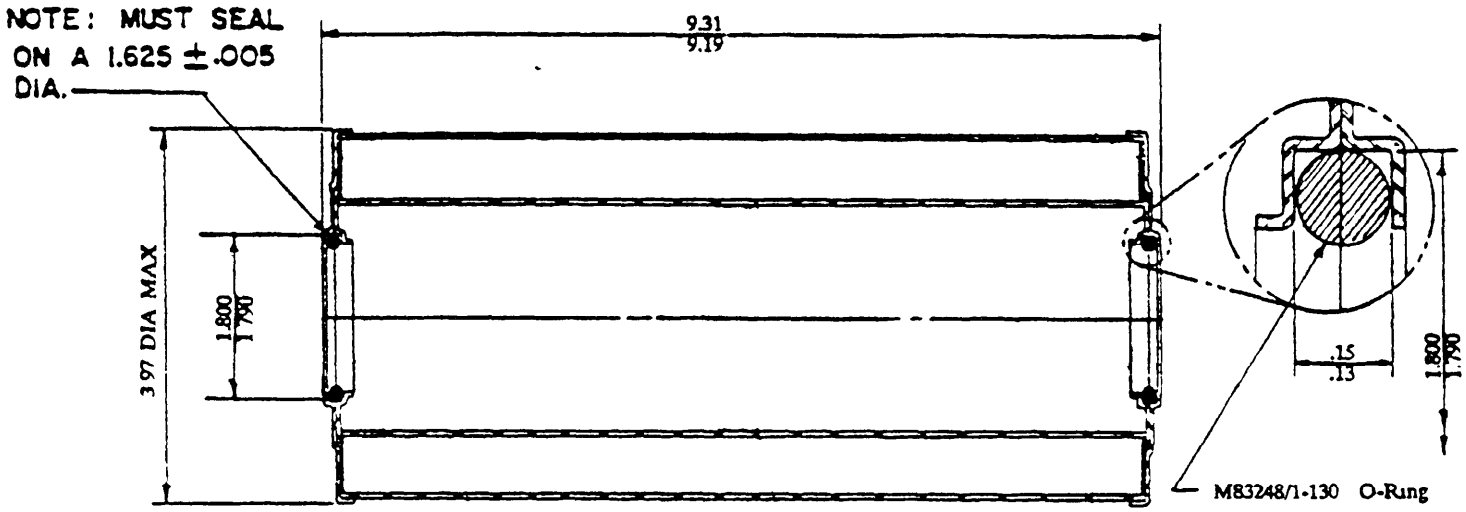

Figure 1. Filter element

NOTES:
1. Dimensions are in inches unless otherwise specified.
2. Material shall be in accordance with the general specification.
3. Seals shall be in accordance with MIL-R-83248 and MIL-R-83248/1, and shall be MIL-R-83248/l-130 size.
4. Quality conformance inspection for each element acquisition shall be in accordance with 4.4 of this specification.
5. Test fluid shall be with or without antistatic additives.
6. Test flow rate for the filtration performance test (4.7.2) shall be as specified in table I.

DISTRIBUTION STATEMENT A. Approval for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Elements:

1. The filter element shall be in accordance with figure 1.
2. Rated flow in accordance with MIL-H-17672, 2135 T-H fluid at 40° C temperature - see table I.
3. Minimum beta ratio - see table I.
4. Air clean fine test dust (A.C.F.T.D) capacity - 35 grams.
5. Terminal pressure drop - 40 psi at rated flow.
6. Clean element pressure drop at rated flow and 68 centistoke (minimum) viscosity - 10 psi maximum.
7. Collapse burst pressure - 150 psi minimum.
8. Reverse flow pressure - 15 psi minimum.
9. Bubble point - 6 inches of water minimum.
10. Flow fatigue cycles - 50,000 cycles.

TABLE I. Minimum beta ratio.

Beta size	Beta ratio min	Rated flow gal/min
B_{10}	75	30
B_5	75	20

Elements Connetor:

1. Element connector shall be in accordance with figure 2.
2. Material shall be nylon or equivalent.

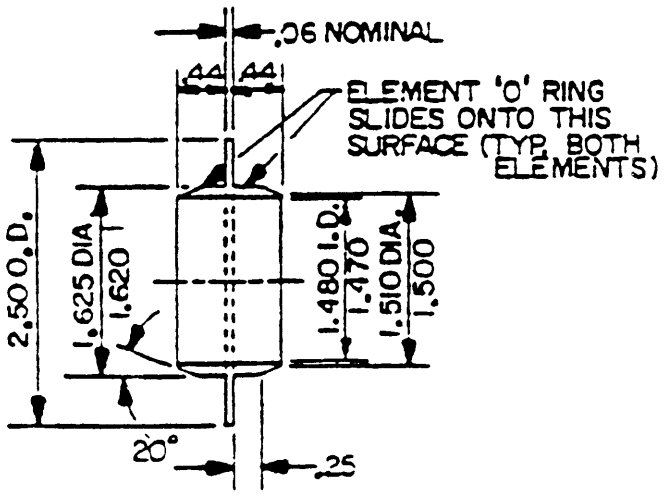

FIGURE 2 Element connector

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:07Z
Check the source to verify that this is the current version before use.

PART NUMBER:

Filter Element:

The part number shall consist of the basic number of this specification sheet number plus applicable beta size and beta ratio number selected from table I.

Example:

M24702/1-BIO-75 filter element with a beta ratio of 75 and a rated flow of 30 gallons per minute.

Element Connector:

The part number shall consist of the basic number of this specification sheet number plus letter “C” for the connector.

Example:

M24702/1-C filter element connector.

Preparing activity:
Navy - SH
(Project 4330-N097)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:07Z
Check the source to verify that this is the current version before use.