
FED. SUP CLASS
6240

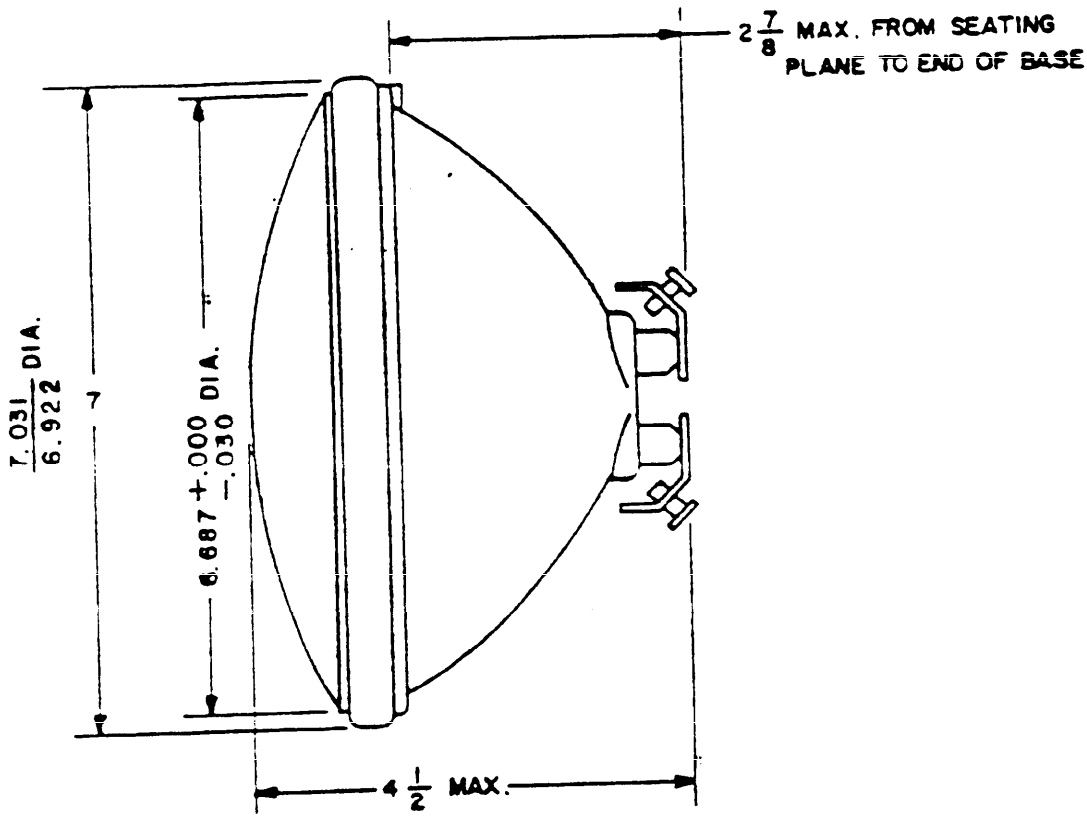

NOTES:

1. Dimensions are in inches.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.

(K) REINSTATED 5 APRIL 1988.

APPROVED 25 JUN 1954 REVISED (M) 14 AUG 1981 (J) 28 MAY 1987 (K) 5 APRIL 1988

USER ACTIVITIES:
Navy - MC

REVIEWER ACTIVITIES:
Army - AT
Navy - SA
Air Force - 11
DLA - GS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Project 6240-1010

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
SH		LAMPS, INCANDESCENT, SEALED BEAM, PAR-56, SCREW TERMINAL BASE	MS15535
Other Cust. ME 99			
Procurement Specifications: NONE	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FSC 6240

AMSC N/A

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:48Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for competitive use shall be made from this document, when applicable.

REVIEWER ACTIVITIES:
Army - AT
Navy - SA
Air Force - 11
DLA - GS

USER ACTIVITIES:
Navy - MC

DD FORM 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

P.A. SH
Other Cust ME 99
Procurement Specifications NONE
SUPERSEDES:
INTERNATIONAL INTEREST
TITLE LAMPS, INCANDESCENT, SEALED BEAM, PAR-56, SCREW TERMINAL BASE
Project 6240-1010
MILITARY STANDARD
MS15535
SHEET 2 OF 2

FED. SUP CLASS 6240

MS part number	Design Volts	Design Watts	Initial max beam candlepower (approx)	Filament const.	Beam spread in degrees (approx) Hor	Beam spread in degrees (approx) Vert	Hours life approx	Industry number	Use	National Stock Number (NSN)
MS15535-1	12.5	100	250,000	C-6	9	5	50	4583	Special service	6240-00-191-0981
MS15535-2	26	250	110,000	C-13	24	13	500	4588	Sea rescue light	6240-00-270-4013
MS15535-3	26	250	30,000	C-13	40	18	500	4589	Sea rescue light	6240-00-270-4695
MS15535-4	120	300	70,000	CC-13	20	15	2,000	300PAR56/2SP	Flood light	6240-00-270-4689
MS15535-5	12	100	225,000	C-6	9	5	100	4585	Mirror deck landing (source light)	6240-00-635-9953
MS15535-6	120	300	10,000	CC-13	60	30	2,000	300PAR56/4WFL	Flood light	6240-00-056-0737
MS15535-8	120	300	24,000	CC-13	35	20	2,000	300PAR56/4WFL	Flood light	6240-00-145-1148

NOTES:
1. This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps.
2. Beam spread shall be taken with lamp having the screw terminals in the vertical position as shown on the figure.
3. Part Number MS15535-7 use part number MS18007-4581.

APPROVED 25 JUN 1954 REVISED (H) 14 AUG 1981 (J) 28 MAY 1987 (K) 6 APRIL 1988

Source: https://assist.dla.mil -- Downloaded: 20240-23T13:48Z
Check the source to verify that this is the current version before use.