
FED. SUP CLASS
4820

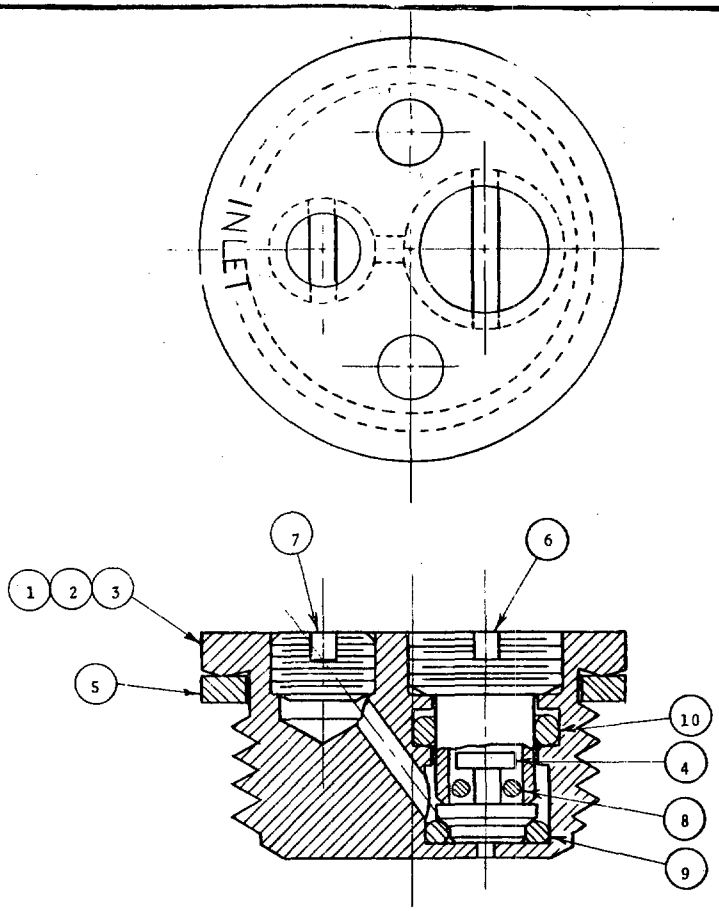


| QTY PER MS PART NUMBER | | | MATERIAL LIST | | |
|---|---|---|---|---|---|
| MS-16858-3 | MS-16858-2 | MS-16858-1 | PIECE NO. | MATERIAL | MATERIAL SPECIFICATION |
| - | - | 1 | 1 | CRES | QQ-S-763, CLASS 310 |
| - | 1 | - | 2 | BRASS | QQ-B-637 COPPER ALLOY NO. 462 |
| 1 | - | - | 3 | ACETAL PLASTIC | L-P-392 TYPE I CL 2 |
| 1 | 1 | 1 | 4 | CRES | QQ-S-763, CLASS 310 |
| 1 | 1 | 1 | 5 | RUBBER | MIL-R-900 |
| 1 | 1 | 1 | 6 | CRES | QQ-S-763, CLASS 310 |
| 1 | 1 | 1 | 7 | CRES | QQ-S-763, CLASS 310 |
| 2 | 2 | 2 | 8 | CRES | QQ-S-763, CLASS 310 |
| 1 | 1 | 1 | 9 | "O" RING | AN 6227-3 |
| 1 | 1 | 1 | 10 | "O" RING | AN 6227-5 |

NOTES:
1. LETTERING SHALL BE ENGRAVED .005 INCH WIDE X .094 INCH HIGH X .005 INCH DEEP. ENGRAVING SHALL BE FILLED WITH ENAMEL MEETING THE REQUIREMENTS OF SPECIFICATION TT-E-496. BLACK ENAMEL SHALL BE USED FOR PIECES 1 AND 2 AND WHITE ENAMEL SHALL BE USED FOR PIECE 3.
2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE: DECIMALS ± .005; FRACTIONS ± 1/64; ANGLES ± 1/2 DEGREE.
3. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 6 Mar 1959 REVISED Ⓐ 7 July 1978

This military standard is approved for use by the Naval Sea Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

| P.A. SH<br>Other Cust | TITLE<br>VALVE; GAS INLET; NONMAGNETIC | MILITARY STANDARD<br>MS16858 (SH) |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES: | SHEET 1 OF 2 |


DD FORM 1 SEP 87 672-1N LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


4820-N385

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:01Z
Check the source to verify that this is the current version before use.


FED. SUP. CLASS
4820

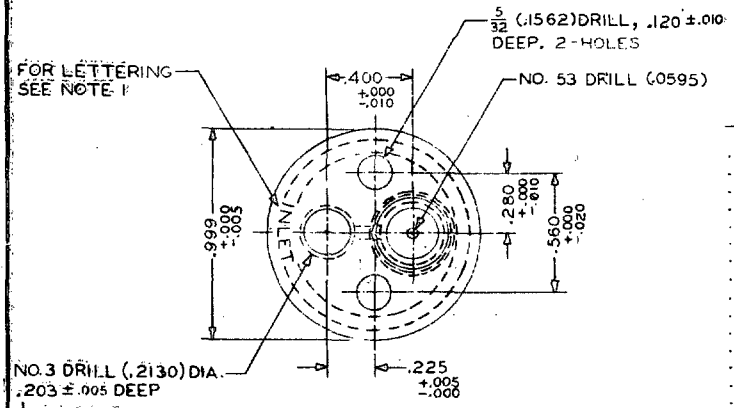



| Inches | MM | Inches | MM |
|---|---|---|---|
| .0003 | .01 | .185 | 4.70 |
| .001 | .025 | .190 | 4.83 |
| .002 | .05 | .203 | 5.16 |
| .005 | .13 | .2130 | 5.41 |
| .010 | .25 | .220 | 5.59 |
| .015 | .38 | .225 | 5.72 |
| .020 | .51 | .248 | 6.30 |
| .030 | .76 | .250 (1/4) | 6.35 |
| .040 | 1.02 | .251 | 6.38 |
| .046 | 1.17 | .258 | 6.55 |
| .0465 | 1.18 | .265 | 6.73 |
| .047 | 1.19 | .270 | 6.86 |
| .050 | 1.27 | .280 | 7.11 |
| .0595 | 1.51 | .296 | 7.52 |
| .060 | 1.52 | .359 | 9.12 |
| .062 | 1.57 | .375 (3/8) | 9.52 |
| .0625 (1/16) | 1.59 | .400 | 10.16 |
| .070 | 1.78 | .405 | 10.29 |
| .094 | 2.39 | .468 | 11.89 |
| .095 | 2.41 | .500 | 12.70 |
| .100 | 2.54 | .530 | 13.46 |
| .120 | 3.05 | .560 | 14.22 |
| .144 | 3.66 | .775 | 19.68 |
| .147 | 3.73 | .790 | 20.07 |
| .150 | 3.81 | .875 (7/8) | 22.22 |
| .1562 | 3.97 | .905 | 22.99 |
| .1660 | 4.22 | .999 | 25.37 |
| .175 | 4.44 | 1.000 | 25.40 |
| .177 | 4.50 | | |
| .179 | 4.55 | | |

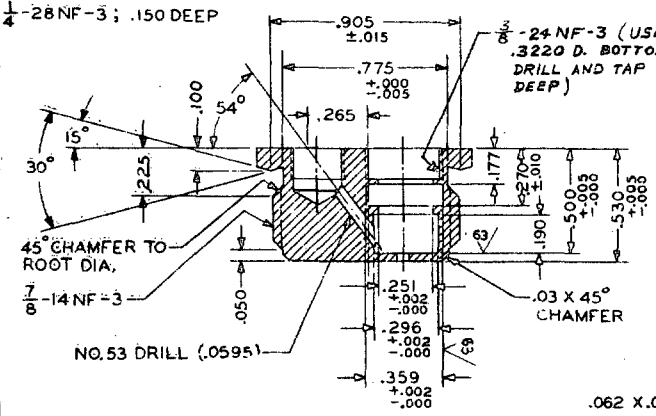



(1)(2)(3) VALVE BODY

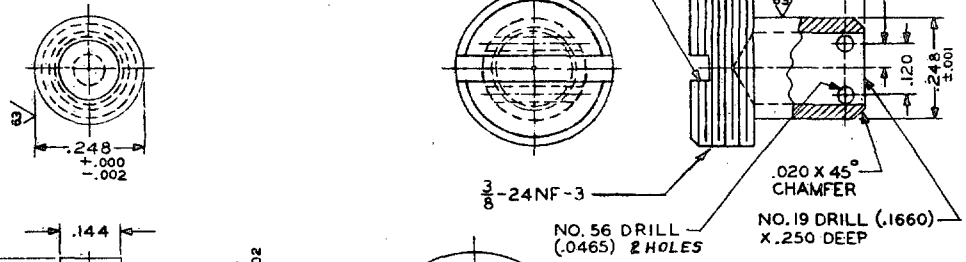

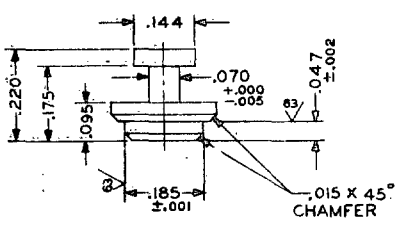


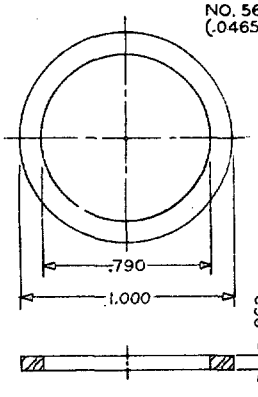

(4) RING PLUG





(5) GASKET

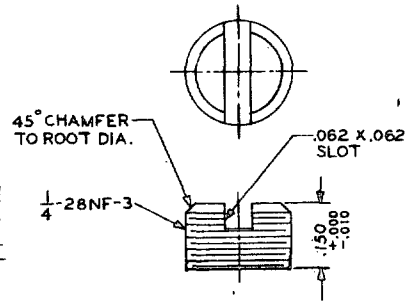(6) VALVE SCREW




(7) INLET PLUG

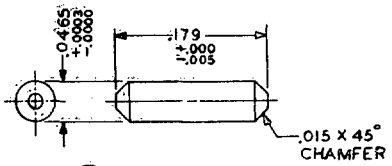


(8) PIN

APPROVED: 6 Mar 1959 REVISED (A) For changes see page 1

This military standard is approved for use by the Naval Sea Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

| P.A. SH | TITLE | MILITARY STANDARD |
|---|---|---|
| Other Cust | VALVE; GAS INLET; NONMAGNETIC | MS16858 (SH) |
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES: | SHEET 2 OF 2 |

DD FORM 1 SEP 57 672-1N LIMITED COORDINATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:01Z
Check the source to verify that this is the current version before use.