
FED. SUP CLASS
5315

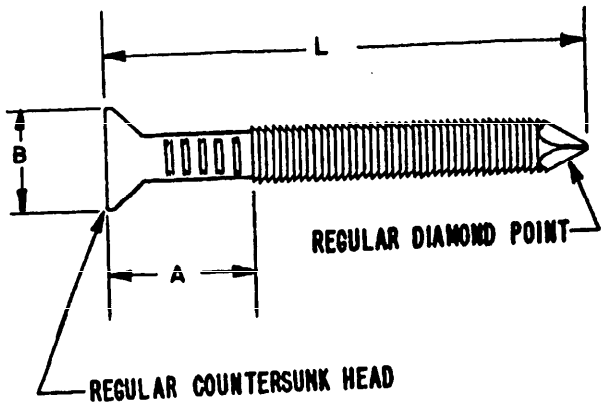

Ⓐ Dash No.	Size	Dimensions			Material
		Length (L) Inches	Gauge Inches	Head diameter (B) Inch	
1	4d	1-1/2	12(0.105)	7/32	Bronze Monel
2	4d	1-1/2	8(.162)	11/32	Bronze Monel
3	5d	1-3/4	10(.135)	9/32	Bronze Monel
4	5d	1-3/4	8(.162)	11/32	Bronze Monel
5	6d	2	8(.162)	11/32	Bronze Monel
6	7d	2-1/4	10(.135)	9/32	Bronze Monel
7	7d	2-1/4	8(.162)	11/32	Bronze Monel
8	8d	2-1/2	8(.162)	11/32	Bronze Monel
9	9d	2-3/4	8(.162)	11/32	Bronze Monel
10	10d	3	8(.162)	11/32	Bronze Monel

NOTES:

Ⓐ 1. Material shall be Monel in accordance with QQ-N-281 or silicon bronze in accordance with QQ-C-591, copper alloy No. 651 as specified.

2. All dimensions are in inches unless otherwise specified.

3. The maximum of dimension "A" shall not exceed 1/3 of the length of dimension "L".

4. The number of rings for all sizes shall be 22 plus or minus 2 rings per inch.

Ⓐ 5. The tolerance for the head diameter (B) shall be plus or minus 0.008 inch for 7/32 inch head, plus or minus 0.010 inch for 9/32 inch head and plus or minus 0.015 inch for 11/32 inch head.

Ⓐ 6. The tolerance for the overall length of dimension "L" shall be plus or minus 1/32 inch for nails up to and including 1-1/2 inches in length and plus or minus 1/16 inch for nails over 1-1/2 inches in length. Ⓐ For changes see sheets 1 and 2.

Ⓑ Date was inadvertently omitted from revision A.

APPROVED 30 DEC 1959 REVISED Ⓐ 3 JAN 1964 Ⓑ 6 APR 1964

Project 5315-N008Sh

P.A.	TITLE	MILITARY STANDARD
SHIPS Other Cust	NAILS, RINGED (FETTER RING)	MS 17106(SHIPS)
Procurement Specification FF-S-606	SUPERSEDES:	SHEET 1 OF 2

This standard has been approved by the Bureau of Ships Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:03Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5315

NOTES (cont'd):

7. The tolerance on the gauge dimensions shall be plus or minus 0.004 inch as measured prior to deformation.
8. The gauge dimension cited refers to the smooth shank before deformation. The deformed (ringed) portion of the nail shall show an increase in diameter of one gauge size plus or minus 0.003 inch over the smooth portion of the shank.
9. Each ring shall be complete in itself; i.e., not spiraled.
Ⓐ 10. Part number: The MS part number consists of the MS number, plus the dash number.
Example: MS17106-1.
11. Referenced documents shall be of the issue in effect on date of invitation for bids.
12. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

APPROVED 30 DEC 1959 REVISED Ⓐ For changes see sheets 1 and 2 Ⓑ For change see sheet 1

This standard has been approved by the Bureau of Ships Department of the Navy and is mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

P.A. SHIPS Other Cust	TITLE NAILS, RINGED (FETTER RING)	MILITARY STANDARD MS 17106(SHIPS)
Procurement Specification FF-S-606	SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:03Z
Check the source to verify that this is the current version before use.