USER SYMBOLS:
Army - EL, MI, AT, ME


REVIEWER SYMBOLS:
Army - AV
Navy - AS
USAF - 11
DSA - ES

"Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIM.'S. AND REQUIREMENTS AS SPECIFIED HEREIN.

FED. SUP CLASS 5310

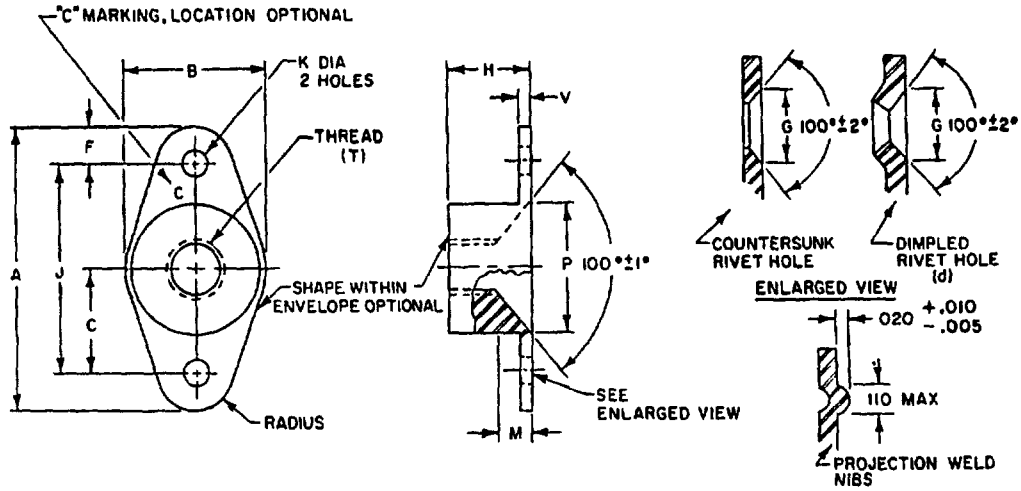

(T) THREAD SIZE (a)	A MAX	B MAX	B MIN	C ± 005	F MIN	G DIA ± 010	(b) H MAX	(c) J ± 002	K DIA +.005 -.000	M REF	P DIA ± 005	V MAT'L MAX	AXIAL STRENGTH LBS MIN	WEIGHT LBS/ 100 MAX
.1640-32 UNJC-3B	.948	422	360	.344	100	200	272	688	.098	.084	365	.047	1,720	.39
.1900-32 UNJF-3B	948	.453	.406	.344	.100	200	.281	.688	.098	.093	411	.047	2,460	.41
.2500-28 UNJF-3B	1 260	.619	.535	.500	.100	.200	.340	1.000	.098	121	.540	.055	4,580	.88
3125-24 UNJF-3B	1 292	766	681	.500	125	.230	422	1.000	.130	.156	.686	.065	7,390	1.17

(a) THREADS BEFORE LUBRICATION PER MIL-S-8879
(b) MINIMUM "H" NOT SPECIFIED, LIMITED ONLY BY STRENGTH REQUIREMENTS
(c) CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005
(d) DIMPLED HOLE TOLERANCE FOR "K" IS +.015 - .000 AFTER FORMING

MATERIAL: CORROSION RESISTANT STEEL, (A286) AMS 5525, AMS 5735, OR AMS 5737
PLATING 800° F. NUTS ONLY, SILVER PLATE IN ACCORDANCE WITH AMS 2410. PLATE THICKNESS, MEASURED ON ANY EXTERNAL SURFACE OF THE NUT, SHALL NOT BE LESS THAN 0 0002 IN. THREADS SHALL SHOW COMPLETE COVERAGE BUT THICKNESS REQUIREMENTS ON THREAD IS WAIVED NO SILVER PLATE ON WELD NIBS AND OPTIONAL ON OTHER EXTERNAL SURFACES.
MAGNETIC PERMEABILITY: SHALL BE LESS THAN 2.0 (AIR = 1.0) FOR A FIELD STRENGTH H = 200 OERSTEDS USING A MAGNETIC PERMEABILITY INDICATOR PER MIL-I-17214, OR EQUIVALENT.
HARDNESS ROCKWELL C49 MAXIMUM
LUBRICANT 450° F. NUTS ONLY, DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-N-25027 ~~FOR USAF APPLICATIONS (D) NUTS TREATED WITH DRY FILM LUBRICANTS SHALL NOT BE USED IN INTERNAL FUEL SYSTEMS.~~
DIMENSIONS IN INCHES.
SURFACE ROUGHNESS IN ACCORDANCE WITH ANSI (USAS) B46 1 UNLESS OTHERWISE SPECIFIED, THE SURFACE ROUGHNESS SHALL NOT EXCEED 125 MICRO INCHES
PERFORMANCE SEE PROCUREMENT SPECIFICATION, EXCEPT 450° F. DRY FILM LUBRICATED NUTS LIMITED TO FIVE REUSE CYCLES.
DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON A CROSS SECTIONAL AREA AT THE BASIC ROOT DIAMETER OF THE THREAD. THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS. THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL25027 SHALL BE USED.
INTERCHANGEABILITY RELATIONSHIP MS21050 NUTS CAN UNIVERSALLY REPLACE NAS681 AND AN361 NUTS OF LIKE MATERIAL, THREAD SIZE, PLATING, LUBRICANTS (SILVER PLATE OR DRY FILM LUBRICANT), RIVET SPACING, AND FASTENING METHOD (PLAIN RIVET HOLES, DIMPLED, COUNTERSUNK RIVET HOLES OR PROJECTION WELDING). BUT NAS 681 AND AN 361 NUTS CANNOT UNIVERSALLY REPLACE MS21050 NUTS.

SEE SHEET 2

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(D) DENOTES CHANGES

APPROVED 12 June 64 REVISED (A) 12 Feb 65 (B) 4 Nov 66 (C) 21 Dec 71 (D) 15 MARCH 1978

P A NAVY - AS Other Cust Army - AV USAF - 11	TITLE NUT, SELF-LOCKING, PLATE, TWO LUG, 100° CSK LOW HEIGHT, CRES, 125 KSI FtU, 450° & 800° F	MILITARY STANDARD MS21050
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES NAS 681 AND AN 361	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

PROJECT NO. 5310-0970

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5310

USER SYMBOLS:
Army - EL, MI, AT, ME

REVIEWER SYMBOLS:
Army - AV
Navy - AS
USAF - 11
DSA - IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

THREAD SIZE	DASH NUMBERS					
	800° F			450° F		
	PLAIN HOLES	CTSK OR DIMPLED HOLES	WELDING PROJEC-TION	PLAIN HOLES	CTSK DIMPLED HOLES	WELDING PROJEC-TION
1640-32 UNJC-3B	-08	-08K	-08W	L08	L08K	L08W
.1900-32 UNJF-3B	-3	-3K	-3W	L3	L3K	L3W
.2500-28 UNJF-3B	-4	-4K	-4W	L4	L4K	L4W
.3125-24 UNJF-3B	-5	-5K	-5W	L5	L5K	L5W

EXAMPLE OF PART NUMBER

MS21050L4K
- NUT DASH NUMBER
- BASIC PART NO

.2500-28UNJF-3B NUT, SELF LOCKING, TWO LUG, CRES, 125 KSI, 450° F, DRY FILM LUBRICATED, WITH COUNTERSUNK OR DIMPLED RIVET HOLES.

INTERCHANGEABLE TABLE			
INACTIVE FOR DESIGN AND - CANCELLED PARTS			SUBSTITUTIVE PARTS
AN 361		NAS 681	
AN361-C832		NAS-C08	MS 21050-08
↑ ---		↑ -C08K	↑ -08K
-WC832		---	-08W
---		-C08M	-L08
---		-C08MK	-L08K
---		---	-L08W
-C1032		-C3	-3
---		-C3K	-3K
-WC1032		---	-3W
---		-C3M	-L3
---		-C3MK	-L3K
---		---	-L3W
-C428		-C4	-4
---		-C4K	-4K
-WC428		---	-4W
---		-C4M	-L4
---		-C4MK	-L4K
---		---	-L4W
-C524		-C5	-5
---		-C5K	-5K
-WC524		---	-5W
---		-C5M	-L5
↓ ---		↓ -C5MK	↓ -L5K
AN361 ---		NAS ---	MS 21050-L5W

APPROVED 12 June 64 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS
Other Cust
Army - AV
USAF - 11

TITLE
NUT, SELF-LOCKING, PLATE, TWO LUG, 100° CSK, LOW HEIGHT, CRES, 25 KSI FTU, 450° & 800° F

MILITARY STANDARD
MS21050

PROCUREMENT SPECIFICATION
MIL-N-25027

SUPERSEDES
NAS 681 AND AN 361

SHEET 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.