THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

DD Form 672, MAY 88 — PREVIOUS EDITIONS ARE OBSOLETE

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY-AV, NAVY-AS, AIR FORCE-11, DLA-
REVIEW: 82
USER: CR, MI
PROJECT NUMBER: 5310-1956
DISTRIBUTION STATEMENT: A Approved for public release distribution is unlimited

Ⓒ DENOTES CHANGE(S)

MILITARY SPECIFICATION SHEET

TITLE: NUT, SELF-LOCKING, PLATE, ONE LUG, REDUCED RIVET SPACING, LOW HEIGHT STEEL, 125 KSI Ftu, 450°F

INCH-POUND

SPECIFICATION SHEET NUMBER: MS21071 — 1 FEB 94 — REV G

SUPERSEDING: MS21071 F — 30 SEP 87 (SEE NOTE 5)

AMSC- N/A — FSC 5310

Page 1 of 2

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIMENSIONS AND REQUIREMENTS SPECIFIED HEREIN

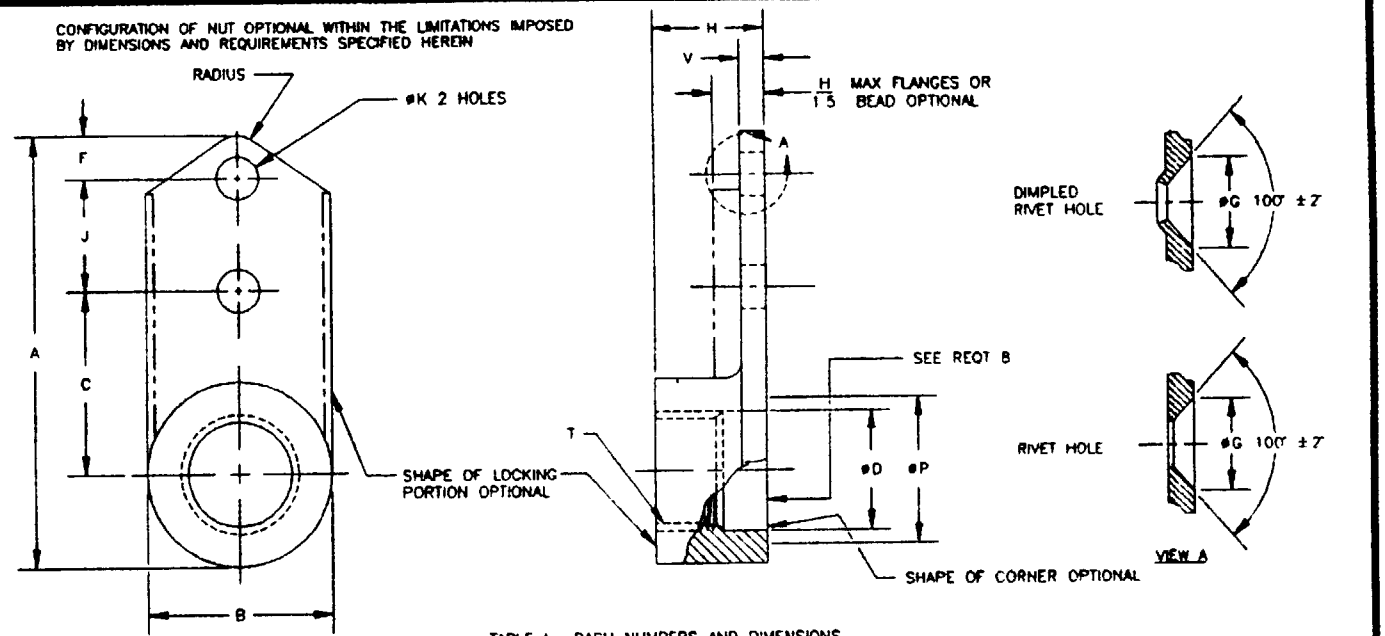


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBERS: PLAIN RIVET HOLES, NON-DRY FILM LUBRICANT	DASH NUMBERS: PLAIN RIVET HOLES, DRY FILM LUBRICANT	DASH NUMBERS: COUNTERSUNK OR DIMPLED RIVET HOLES, NON-DRY FILM LUBRICANT	DASH NUMBERS: COUNTERSUNK OR DIMPLED RIVET HOLES, DRY FILM LUBRICANT	T THREAD SIZES	A MAX	B MAX	B MIN	C ± 005	øD MIN	F MIN	øG ± 010	1/ H MAX	2/ J ± 002	3/ øK +005 -000	øP ± 005	V MAX	AXIAL STRENGTH LBS/MIN	WEIGHT LBS/100
-02	L02	—	—	086-56 UNJC-3B	507	164	140	125	—	071	4/	110	219	066	130	035	440	06
-03	L03	—	—	099-48 UNJC-3B	535	184	140	133	—	071	4/	125	219	066	143	035	550	09
-04	L04	-04K	L04K	112-40 UNJC-3B	667	260	140	203	—	089	200	143	219	098	166	040	750	12
-06	L06	-06K	L06K	138-32 UNJC-3B	684	265	195	218	—	089	200	171	219	098	206	047	1,130	15
-08	L08	-08K	L08K	164-32 UNJC-3B	715	297	235	234	168	100	200	250	219	098	248	047	1,720	23
-3	L3	-3K	L3K	190-32 UNJF-3B	745	328	298	250	194	100	200	250	219	098	274	047	2,460	27
-4	L4	-4K	L4K	250-28 UNJF-3B	822	414	380	281	254	100	200	281	219	098	344	055	4 580	46
-5	L5	-5K	L5K	3125-24 UNJF-3B	1 026	505	475	359	317	125	230	328	269	130	417	065	7,390	85
-6	L6	—	—	375-24 UNJF-3B	1 139	614	580	414	379	125	230	344	269	130	505	075	11,450	2 04

1/ MINIMUM "H" NOT SPECIFIED LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION
2/ CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN 005
3/ DIMPLED RIVET HOLE TOLERANCE FOR "øK" IS +015 -000
4/ SPACE WILL NOT PERMIT COUNTERSINK

Form Approved OMB No 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

REQUIREMENTS

1 MATERIAL CARBON STEEL, COMPOSITIONS 1035 (UNS G10350) 1040 (UNS G10400) AND 1050 (UNS G10500) IN ACCOORDANCE WITH ASTM A827 OR QQ-S-700 1042 (UNS G10420) IN ACCORDANCE WITH ASTM A29 ALLOY STEEL, GRADES 4130 (UNS G41300) 4340 (UNS G43400) AND 8740 (UNS G87400) IN ACCORDANCE WITH ASTM A29

2 FINISH CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416 TYPE II CLASS 2 FOR DRY FILM LUBRICATED NUTS THE TYPE AND CLASS ARE OPTIONAL IF THE NUTS MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416 TYPE II

3 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

4 HARDNESS 49HRC, MAX

5 THREADS THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879

6 SURFACE TEXTURE SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED SHALL NOT EXCEED 125 MICROINCHES, IN ACCORDANCE WITH ANSI/ASME B46 1


7 LUBRICANT DRY FILM LUBRICANT APPROVED IN ACCORDANCE WITH MIL-N-25027 NON-DRY FILM LUBRICANTS SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN MIL-S-8802

8 EDGES BREAK ALL SHARP EDGES AND REMOVE ALL BURRS

9 COUNTERBORE/COUNTERSINK ON SIZE 164 AND LARGER THREAD RELIEF SHALL BE 062 MINIMUM ON SIZE 138 AND SMALLER COUNTERSINK TO "P" DIAMETER

10 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS21071L4K



MS21071L4K INDICATES NUT SELF-LOCKING PLATE ONE LUG REDUCED RIVET SPACING LOW HEIGHT, STEEL, 125 KSI Ftu 450° F 250-28 UNJF-3B, DRY FILM LUBRICANT COUNTERSUNK OR DIMPLED HOLES

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THIS ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4 DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS THESE NUTS ARE DESIGNED TO BE ISSUED ON 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

5 MS21071 SUPERSEDES NAS696

INTERCHANGEABILITY RELATIONSHIP

MS21071 NUTS CAN UNIVERSALLY REPLACE NAS696 NUTS OF LIKE MATERIAL, THREAD SIZE LUBRICANT (DRY FILM OR NON-DRY FILM LUBRICANT), AND FASTENING METHOD (PLAIN RIVET HOLES DIMPLED OR COUNTERSUNK RIVET HOLES) BUT THESE NAS696 NUTS CANNOT UNIVERSALLY REPLACE MS21071 NUTS

INTERCHANGEABILITY TABLE (G)

CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS	CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS
NAS696X02	MS21071-02	NAS696X3K	MS21071-3K
NAS696A02	MS21071L02	NAS696A3K	MS21071L3K
NAS696X03	MS21071-03	NAS696X4	MS21071-4
NAS696A03	MS21071L03	NAS696A4	MS21071L4
NAS696X04L	MS21071-04	NAS696X4K	MS21071-4K
NAS696A04L	MS21071L04	NAS696A4K	MS21071L4K
NAS696X04LK	MS21071-04K	NAS696X5	MS21071-5
NAS696A04LK	MS21071L04K	NAS696A5	MS21071L5
NAS696X06L	MS21071-06	NAS696X5K	MS21071-5K
NAS696A06L	MS21071L06	NAS696A5K	MS21071L5K
NAS696X06LK	MS21071-06K	NAS696X6	MS21071-6
NAS696A06LK	MS21071L06K	NAS696A6	MS21071L6
NAS696X08	MS21071-08		
NAS696A08	MS21071L08		
NAS696X08K	MS21071-08K		
NAS696A08K	MS21071L08K		
NAS696X3	MS21071-3		
NAS696A3	MS21071L3 (G)		

PREPARING ACTIVITY	DLA-IS	MILITARY SPECIFICATION SHEET	SPECIFICATION SHEET NUMBER
CUSTODIANS ARMY-	AV	TITLE	MS21071 1 FEB 94 REV G
AIR FORCE-	11 NAVY- AS DLA-	NUT SELF-LOCKING PLATE ONE LUG, REDUCED RIVET SPACING, LOW HEIGHT, STEEL, 125 KSI Ftu, 450°F	SUPERSEDING MS21071 F 30 SEP 87 (SEE NOTE 5)
REVIEW 82			AMSC- N/A FSC 5310
USER CR MI			
PROJECT NUMBER 5310-1956			

DISTRIBUTION STATEMENT
A Approved for public release distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.