PROJECT NO. 5310-1152

FED. SUP CLASS
5310

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11
ARMY - AV
DIA - ER

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

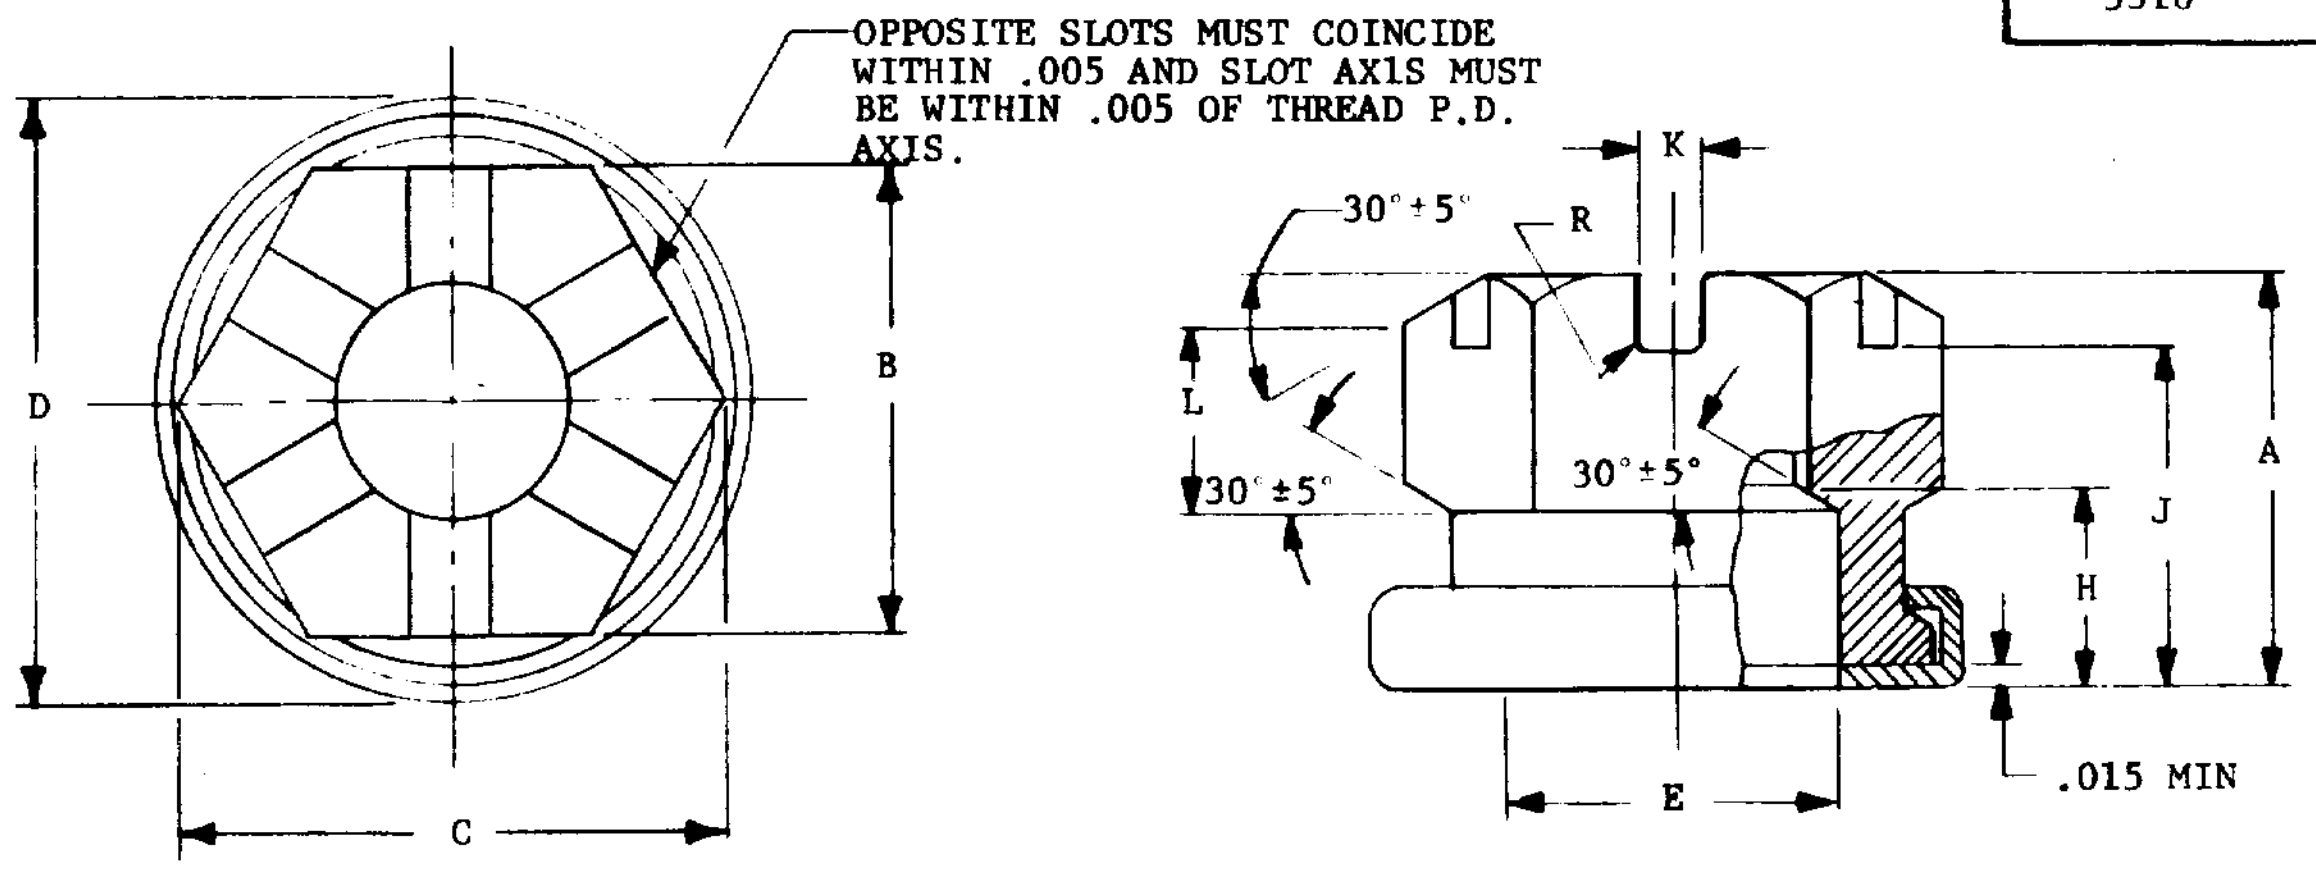
OPPOSITE SLOTS MUST COINCIDE WITHIN .005 AND SLOT AXIS MUST BE WITHIN .005 OF THREAD P.D. AXIS.
D
B
C
K
R
30° ± 5°
L
30° ± 5°
30° ± 5°
A
J
H
E
.015 MIN

Ⓑ

SIZE DASH NO. △	(a) THREADS PER MIL-S-8879	A		B		C	D		E		H	
		MAX	MIN	MAX	MIN	MIN	MAX	MIN	(b) MAX	(c) MIN	MAX	MIN
-3	.1900-32UNJF-3B	.390	.370	.376	.367	.413	.490	.460	.240	.230	.161	.141
-4	.2500-28UNJF-3B	.425	.405	.439	.430	.488	.560	.530	.309	.299	.192	.172
-5	.3125-24UNJF-3B	.456	.436	.502	.492	.557	.640	.610	.395	.385	.223	.203
-6	.3750-24UNJF-3B	.502	.482	.564	.553	.628	.710	.680	.460	.450	.238	.218
-7	.4375-20UNJF-3B	.550	.530	.627	.616	.698	.785	.755	.529	.519	.269	.249
-8	.5000-20UNJF-3B	.596	.576	.752	.741	.840	.925	.895	.614	.604	.301	.281
-9	.5625-18UNJF-3B	.710	.690	.877	.865	.988	1.080	1.050	.686	.676	.332	.312
-10	.6250-18UNJF-3B	.822	.792	1.002	.990	1.121	1.224	1.194	.770	.760	.407	.387
-12	.7500-16UNJF-3B	.951	.911	1.064	1.052	1.191	1.283	1.253	.915	.905	.450	.430
-14	.8750-14UNJF-3B	1.058	1.018	1.252	1.239	1.403	1.495	1.465	1.065	1.055	.495	.475
-16	1.0000-12UNJF-3B	1.202	1.162	1.440	1.427	1.615	1.707	1.677	1.215	1.205	.544	.524

SIZE DASH NO.	J		K		L	R	AXIAL STRENGTH LBS.	WEIGHT LBS/100
	MAX	MIN	MAX	MIN	MIN	MAX	MIN	MAX
-3	.279	.259	.108	.078	.110	.035	1,105	1.04
-4	.316	.296			.125		2,040	1.40
-5	.347	.327					3,250	1.72
-6	.378	.358	.155	.125	.140	.053	5,050	2.13
-7	.409	.389			.130		6,800	2.50
-8	.472	.452			.150		9,250	4.40
-9	.550	.530	.187	.157	.165	.062	11,800	7.40
-10	.633	.613			.170		15,050	7.90
-12	.765	.745			.220		22,000	8.60
-14	.871	.851			.288		30,000	16.70
-16	.984	.964			.333		40,350	19.80

APPROVED 12 JAN 68 REVISED Ⓐ 7 DEC 73 Ⓑ 28 AUG 1981

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓐ ENTIRE STANDARD REVISED & REDRAWN. Ⓑ DENOTES CHANGES

P.A. NAVY - AS Other Cust USAF-11 ARMY-AV	INTER-NATIONAL INTEREST **	TITLE NUT, CASTELLATED, HEXAGON, COUNTERBORED ASSEMBLED WASHER, 450°F (FOR SELF-RETAINING BOLTS)	MILITARY STANDARD MS 21244
PROCUREMENT SPECIFICATION FF-N-836		SUPERSEDES	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5310

(a) NUTS WILL ASSEMBLE ON EITHER MIL-S-7742 OR MIL-S-8879 THREADED BOLTS.

(b) CONCENTRICITY: "E" TO BE CONCENTRIC TO P.D. OF THREAD WITHIN .005 TIR.

(c) WASHER I.D. MAY BE .005 LESS THAN "E" MIN.

NOTES:

1. MATERIAL: a. BODY: STEEL (SEE PROCUREMENT SPECIFICATION.) ; CRES (A286) LUBRICATED
   b. WASHER: CRES 302 OR 321
2. PROTECTIVE TREATMENT: a. STEEL, CADMIUM PLATING IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. PARTS WITH CLASS 3 PLATING MAY BE FURNISHED FROM SUPPLIERS STOCK UNTIL JUNE 1974.
   b. CRES-PASSIVATE IN ACCORDANCE WITH QQ-P-35.
3. THREADED ELEMENT SHALL ROTATE FREELY IN AND AGAINST THE WASHER.
4. SURFACE TEXTURE IN ACCORDANCE WITH ANSI-B-46.1 SHALL NOT EXCEED 125 MICRO INCHES.
5. BREAK ALL SHARP EDGES AND REMOVE BURRS AND SLIVERS.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ±.010
7. DESIGN INFORMATION: THESE NUTS ARE FOR USE WITH SELF-RETAINING BOLTS AND MAY BE USED AT TEMPERATURES 450°F AND BELOW. FOR DESIGN USAGE LIMITATIONS SEE MS33602. NUTS ARE TO BE INSTALLED IN ACCORDANCE WITH MS33540.
8. EXAMPLE OF PART NUMBER: MS21244-4 = .2500-28 STEEL CADMIUM PLATED.
   MS21244-10C = .6250-18 CRES, PASSIVATED. LUBRICATED

△ 9. ADD "C" AFTER DASH NUMBER TO INDICATE CRES

10. MAGNETIC PREMEABILITY OF CRES NUTS SHALL BE LESS THAN 2.0(AIR=1.0) FOR A FIELD STRENGTH H = 200 OERSTEDS USING A MAGNETIC PERMEABILITY INDICATOR IN ACCORDANCE WITH MIL-I-17214 OR EQUIVALENT.

* CERTAIN PROVISIONS FOR ACROSS FLAT DIMENSIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (ABC AIR STD 17/2). WHEN REVISION, OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

USER SYMBOLS:

REVIEWER SYMBOLS:
NAVY - AS
USAF - 11
ARMY - ER
DLA - IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 12 JAN 68 REVISED (B) FOR CHANGES SEE SHEET 1

P.A. NAVY - AS Other Cust USAF-11 ARMY-AV	INTER-NATIONAL INTEREST *	TITLE NUT, CASTELLATED, HEXAGON, COUNTERBORED ASSEMBLED WASHER, 450 F (FOR SELF-RETAINING BOLTS)	**MILITARY STANDARD** **MS21244**
PROCUREMENT SPECIFICATION FF-N-836		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/6649 2-1