This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

User activities: Army -
Navy -
Air Force -

FED. SUP CLASS
5930

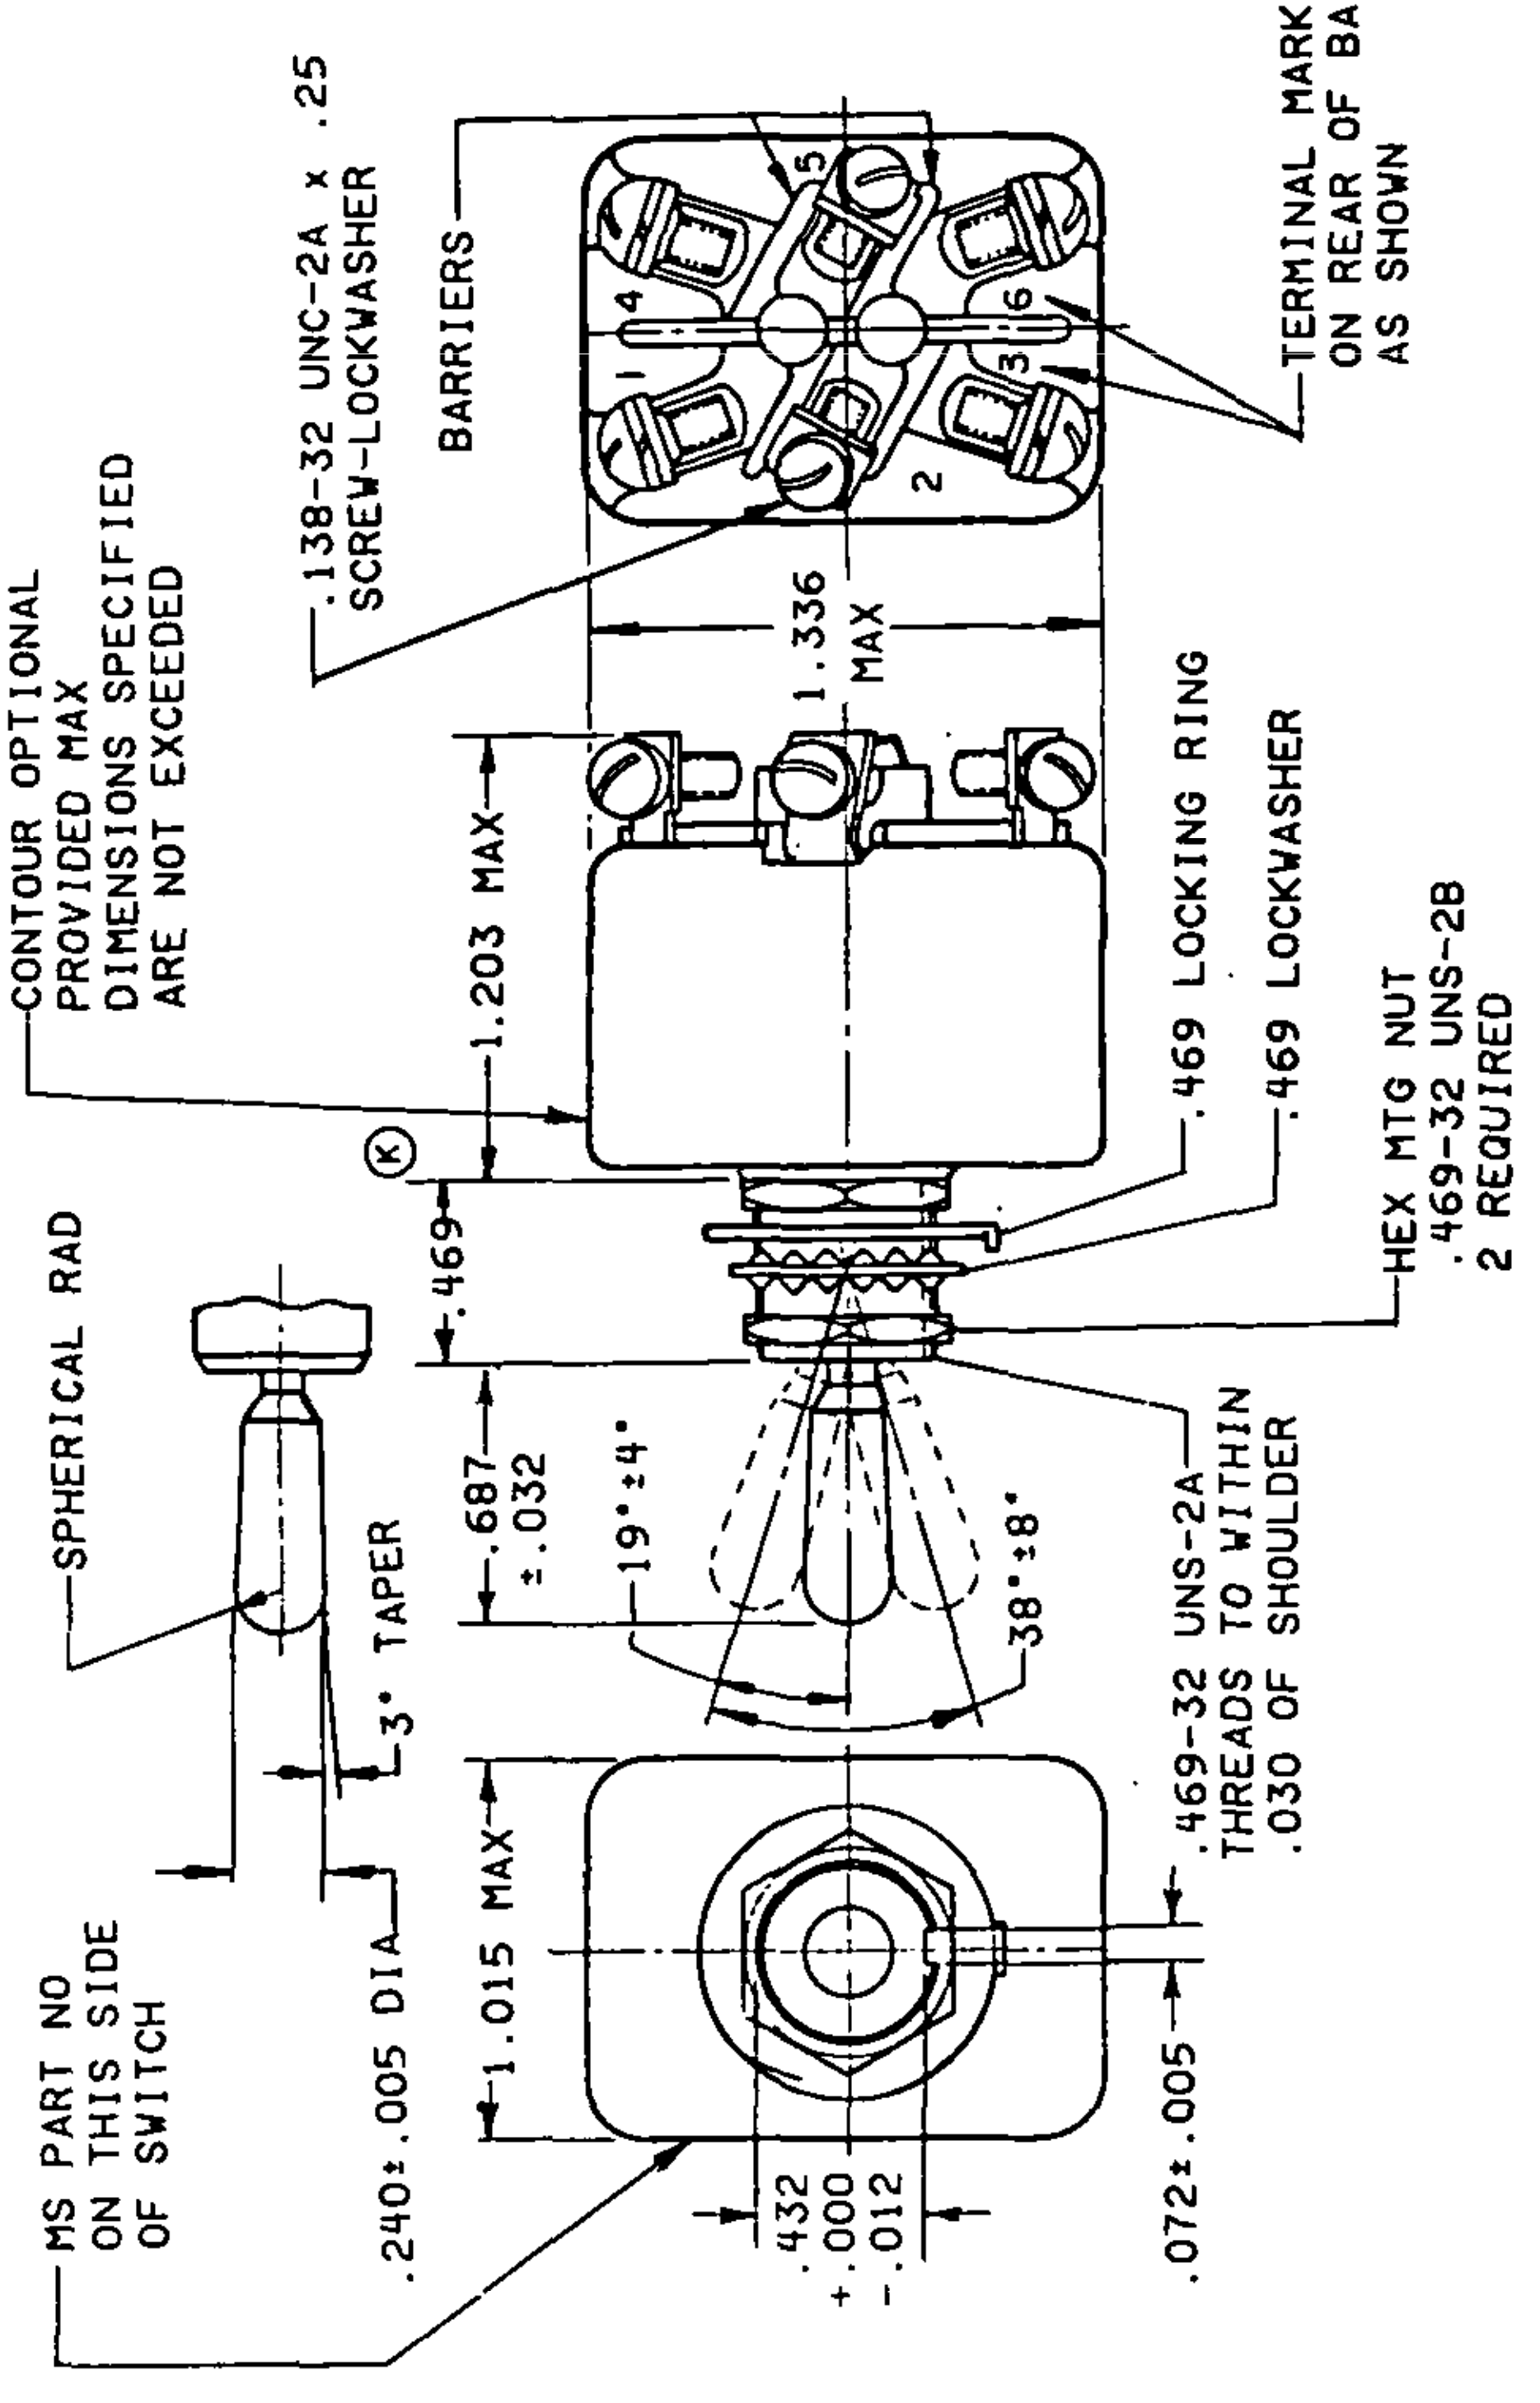

CONTOUR OPTIONAL PROVIDED MAX DIMENSIONS SPECIFIED ARE NOT EXCEEDED
.138-32 UNC-2A x .25 SCREW-LOCKWASHER
BARRIERS
TERMINAL MARKINGS ON REAR OF BASE AS SHOWN
1
2
3
4
5
6
1.336 MAX
1.203 MAX
Ⓚ
.469
.469 LOCKING RING
.469 LOCKWASHER
HEX MTG NUT .469-32 UNS-2B 2 REQUIRED
SPHERICAL RAD
.687 ±.032
19° ±4°
38° ±8°
3° TAPER
.469-32 UNS-2A THREADS TO WITHIN .030 OF SHOULDER
MS PART NO ON THIS SIDE OF SWITCH
.240±.005 DIA
1.015 MAX
.432 +.000 -.012
.072±.005

Ⓚ Denotes change

APPROVED 28 Aug 58
REVISED Ⓔ 11 Jul 72 Ⓕ 24 Jul 73 Ⓖ 23 Aug 76 Ⓗ 20 Mar 81 Ⓙ 18 Oct 85 Ⓚ 30 SEP 86

P.A Air Force-85 Other Cust Army-ER Navy-AS	International Interest ASCCAS 12/16A	TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS 25307
Procurement Specification MIL-S-8834		SUPERSEDES: MS0025307(USAF)	PAGE 1 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5930-1331-08

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

User activities:
Army -
Navy -
Air Force -

FED. SUP CLASS
5930

DETAIL REQUIREMENTS;

MS DASH NO. ENVIRONMENTAL SEALED	CIRCUIT MADE BETWEEN TERMINALS AS INDICATED WITH THE TOGGLE LEVER IN THESE POSITIONS:			CURRENT CAPACITY AMPERES PER POLE 28 VOLTS DC 1/			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 400 HERTZ 1/			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 60 HERTZ 1/			LIFE LOW CURRENT LEVEL SWITCHING	SUPERSEDED DASH NUMBER
	OPPOSITE KEYWAY SIDE	CENTER POSITION	KEYWAY SIDE	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	30 mV	TOGGLE SEALED
-212	ON 2-3, 5-6	OFF	ON 1-2,4-5	7	25	15	7	25	15	7	20	15	10 mA	-211
-222		NONE	OFF											-221
-232			ON 1-2,4-5											-231
-242		OFF	NONE											-241
-262		NONE	MOM-ON 1-2, 4-5											-261
-272	MOM-ON 2-3,5-6	OFF												-271
-282	NONE													-281
-292	ON 2-3,5-5	NONE	MOM-OFF											-291
-302	OFF		MOM-ON 1-2,4-5											-301
-312	ON 2-3,5-6	OFF												-311

1/ Application information ratings at room temperature.

APPROVED 28 Aug 58 **REVISED** Ⓚ For changes see pages 1 & 3

P.A Air Force-85 Other Cust Army-ER Navy-AS	International Interest ASCCAS 12/16A	TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS 25307
Procurement Specification MIL-S-8834		SUPERSEDES: MS0025307(USAF)	PAGE 2 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
5930

User activities: Army -
Navy -
Air Force -

Review activities: Army - AR,MI
Navy - EC
Air Force - 11,17,99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 28 AUG 58 REVISED Ⓚ FOR CHANGES SEE PAGES 1 & 3

Ⓚ

MS DASH NO. ENVIRONMENTAL SEALED	CURRENT CAPACITY [1/] AMPERES PER POLE 250 VOLTS 60 HERTZ AC			CURRENT CAPACITY [1/] AMPERES PER POLE 125 VOLTS DC			CURRENT CAPACITY [1/] AMPERES PER POLE 250 VOLTS DC			LIFE LOW CURRENT LEVEL SWITCHING 30 mV	SUPERSEDED DASH NUMBER
	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT		TOGGLE SEALED
-212		10	7		750 mA	-		500 mA	-	10 mA	-211
-222											-221
-232											-231
-242											-241
-262											-261
-272											-271
-282											-281
-292											-291
-302											-301
-312											-311

[1/] Application information ratings at room temperature.

P.A AIR FORCE-85 Other Cust ARMY - ER NAVY - AS	International Interest ASCCAS 12/16A	TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS 25307
Procurement Specification MIL-S-8834		SUPERSEDES: MS0025307 (USAF)	PAGE 3 OF 4

DD FORM 1 MAY 73 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
5930

INCHES	mm	INCHES	mm
.005	0.13	.25	6.35
.012	0.30	.432	10.97
.030	0.76	.469	11.91
.032	0.81	.687	17.45
.072	1.83	1.015	25.78
.138	3.51	1.203	30.56
.240	6.10	1.336	33.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±.5° on angles.
4. For hardware and terminal screw detail specifications see appendix of MIL-S-8834.
5. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. The MS dash numbers supersede and are completely interchangeable with the superseded dash numbers.
8. Example of part numbers:
   MS25306-212 = ON-OFF-ON, environmentally sealed switch.
   MS25306-272 = MOM-ON, OFF, MOM-ON environmentally sealed switch.
9. Maximum weight: .0953 pound (43.2 grams).
10. Altitude requirements: 80,000 feet.
11. 115 V ac, 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

User activities: Army -
Navy -
Air Force -

APPROVED 28 Aug 58 REVISED Ⓚ For changes see pages 1 & 3

P.A
Air Force-85
Other Cust
Army-ER
Navy-AS

International interest
ASCCAS
12/16A

TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, DOUBLE POLE, .469 MOUNTING BUSHING, 25 AMPERES

MILITARY STANDARD

MS 25307

Procurement Specification
MIL-S-8834

SUPERSEDES:
MS0025307(USAF)

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.