



FED SUP CLASS
4730

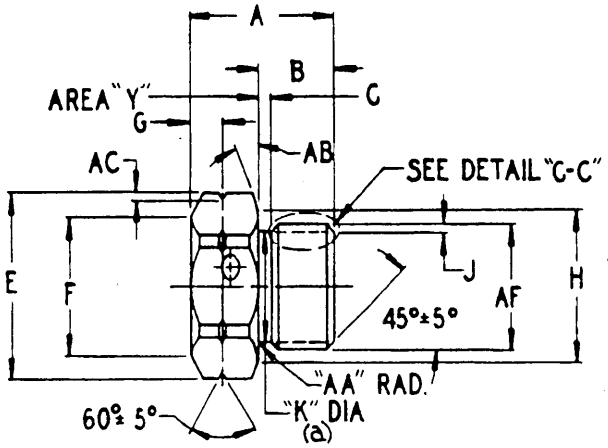

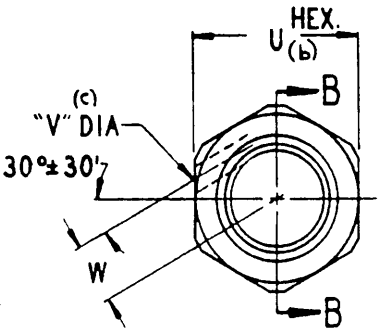

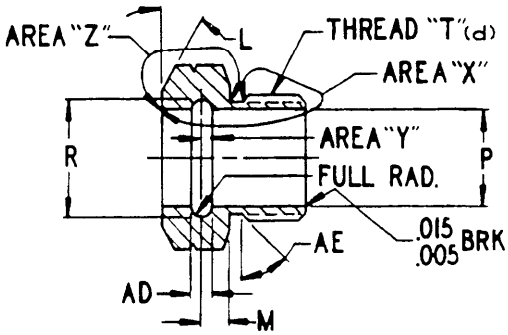

SECTION B-B

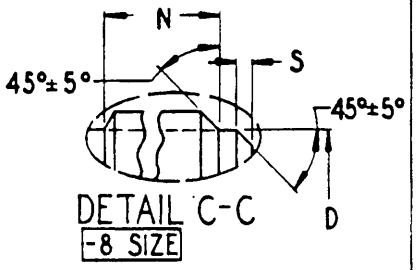

DETAIL C-C
-8 SIZE

(a) THREAD GAGE MUST ENTER THREAD RELIEF
(b) USE COMMERCIAL STOCK SIZE TOLERANCES
(C) HOLE THRU TO WIRE GROOVE
(d) THREADS MUST BE ROLLED

THREADS PER SPEC MIL-S-7742.
MATERIAL : CORROSION RESISTING STEEL, CLASS 304, CONDITION "B" SPECIFICATION QQ-S-763. MIN. YIELD : 70,000 PSI ON -4C, -6C AND -8C AND 80,000 PSI ON -10C
FINISH : CORROSION RESISTING STEEL, PASSIVATE PER MIL-F-83296

PART TO BE DRY-FILM LUBRICATED IN AREA "X" PER MIL-L-8937. DRY-FILM ALLOWED IN AREA "Y", BUT NOT REQD. NO DRY-FILM ALLOWED IN AREA "Z".

DIMENSION IN INCHES. UNLESS OTHERWISE SPECIFIED : RADIUS OR BREAK ALL CORNERS .005 +.005/-.000. REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ANSI B46.1-1962 NOT TO EXCEED 125 AA., ALL DIAMETERS MUST BE CONCENTRIC WITHIN .005 TIR.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS IS A DESIGN STANDARD FOR MANUFACTURING PURPOSES. THE ITEM IS ONLY PROCURED AS AN INTEGRAL PART OF ADAPTER ASSY.

NEXT ASSEMBLY MS27620, MS27621, MS27633 AND MS27634

APPROVED 17 Mar 71

NOTE : THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U.S. PATENT NOS. 2,833,567; 3,044,163; 3,055,682)

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF-11 Other Cust	TITLE UNION, NIPPLE	MILITARY STANDARD MS27624
Procurement Specification	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MS PART NUMBER	A ±.010	B ±.005	C ±.005	D ±.010	E ±.005	F ±.02	G ±.005	H ±.02
MS27624-4C	.575	.356	.110	—	.825	.69	.110	.72
MS27624-6C	.653	.340	.085	—	.962		.156	.84
MS27624-8C	.707	.395	.100	.783	1.100	.97		.97
MS27624-10C	.613	.338		—	1.375	1.22	.138	1.22

J ±.005	K ±.005	L ±5°	M ±.003	N ±.005	P ±.003	R ±.005	S ±.005	THREAD "T"
.041	.544	30°	.072	—	.454	.531	—	5/8-18UNF-3A
.043	.660		.126	—	.507	.620	—	3/4-16UNF-3A
—	.813	15°	.118	.245	.691	.781	.030	7/8-24UNS-3A
.037	.989		.114	—	.834	.943	—	1 1/16-20UN-3A

PITCH DIAMETER	U (b)	V ±.005	W ±.005	AA ±.010	AB ±5°	AC ±.010	AD	
.5889/.5854	.750	.086	.224	.045	20°	.020	.086	±.002
.7094/.7056	.875	.101	.260	.020			.100	
.8479/.8448	1.000		.341		15°		.128	+.005-.000
1.0300/1.0266	1.250	.131	.406					

AE ±5°	AF	
45°	.625	+.000 -.009
	.750	
30°	.875	+.000 -.007
45°	1.062	+.000 -.008

APPROVED 17 Mar 71

NOTE: THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U.S. PATENT NOS. 2,833,567; 3,044,163; 3,055,682)

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF-11 Other Cust	TITLE UNION, NIPPLE	MILITARY STANDARD MS27624
Procurement Specification	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972 -714-163/5247

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.