
FED. SUP CLASS
5305

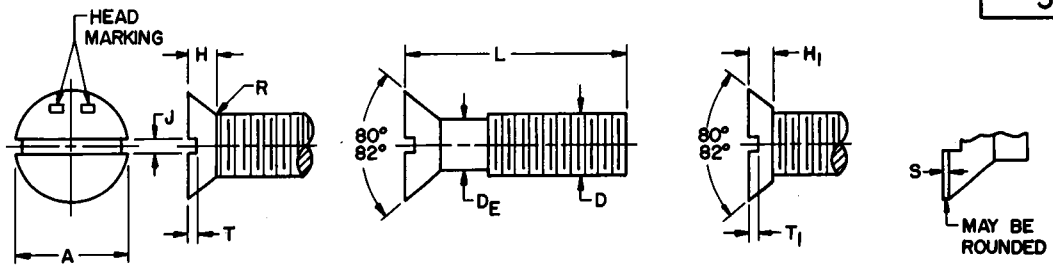

FULL HEAD UNDERCUT HEAD

			#1 (.0730)	#2 (.0860)	#4 (.1120)	#6 (.1380)	#8 (.1640)	#10 (.1900)	1/4 (.2500)	5/16 (.3125)
NOMINAL SIZE D										
THREADS PER INCH			64NC	56NC	40NC	32NC	32NC	24NC	20UNC	18UNC
BODY DIAMETER	D_E	Max	.0730	.0860	.1120	.1380	.1640	.1900	.2500	.3125
		Min	.0603	.0717	.0925	.1141	.1399	.1586	.2127	.2712
HEAD DIAMETER	A	Max Sharp	.146	.172	.225	.279	.332	.385	.507	.635
		Min Sharp	.130	.156	.207	.257	.308	.359	.477	.600
		Abs Min	.126	.150	.200	.249	.300	.348	.462	.581
SLOT WIDTH	J	Max	.026	.031	.039	.048	.054	.060	.075	.084
		Min	.019	.023	.031	.039	.045	.050	.064	.072
FLAT	S	Max	.003	.003	.004	.005	.006	.007	.009	.011
RADIUS	R	Max	.031	.036	.050	.063	.063	.083	.100	.111
FULL HEAD — HEAD HEIGHT	H	Max	.043	.051	.067	.083	.100	.116	.153	.191
		Min	.033	.040	.055	.069	.084	.098	.131	.165
FULL HEAD — SLOT DEPTH	T	Max	.019	.023	.030	.038	.045	.053	.070	.088
		Min	.012	.015	.020	.024	.029	.034	.046	.058
UNDERCUT HEAD — HEAD HEIGHT	H_1	Max	.032	.037	.048	.060	.071	.083	.108	.135
		Min	.022	.026	.036	.046	.055	.065	.086	.109
UNDERCUT HEAD — SLOT DEPTH	T_1	Max	.016	.019	.025	.032	.037	.044	.058	.073
		Min	.012	.015	.020	.024	.029	.034	.046	.058

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

LENGTH L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
1/8	+0 -1/32	1	8	18	31	46			
3/16		2	9	19	32	47	65		
1/4		3	10	20	33	48	66		
5/16		4	11	21	34	49	67	83	
3/8		5	12	22	35	50	68	84	99
7/16		6	13	23	36	51	69	85	100
1/2		7	14	24	37	52	70	86	101
5/8			15	25	38	53	71	87	102
3/4			16	26	39	54	72	88	103
7/8			17	27	40	55	73	89	104
1				28	41	56	74	90	105
1-1/4	+0 -1/16			29	42	57	75	91	106
1-1/2				30	43	58	76	92	107
1-3/4					44	59	77	93	108
2					45	60	78	94	109
2-1/4	+0 -3/32					61	79	95	110
2-1/2						62	80	96	111
2-3/4						63	81	97	112
3						64	82	98	113

Minimum complete thread length of 1-3/4.

Ⓐ CANCELLED SEE SHEET 2

MATERIAL: Corrosion Resisting Steel, Specification QQ-S-763, 70,000 PSI minimum tensile strength, minimum elongation 16% in 2 inches.

FINISH: Passivated by immersion for a period of 20 minutes in a solution containing 15% (by weight) of nitric acid at a temperature of 70°F ±5°, followed by a thorough rinse in hot water.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

HEAD MARKING: For corrosion resisting steel screws. Only one visible dash necessary after slotting operation. Position optional. Screws size #4 and smaller require no head markings.

NOTES: (1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35249-1.
(4) Sizes above dotted line have undercut head.
(5) All dimensions in inches.

Ⓐ For changes see sheets 1 and 2.

APPROVED FEB 9, 1954 REVISED Ⓐ 19 DEC 63

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust Ships MOAMA	TITLE SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, NC-2A AND UNC-2A	MILITARY STANDARD MS 35249	
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:	SHEET 1 OF 2	

DD FORM SEP 67 672-1 (Coordinated)

Source: https://assist.dla.mil - Downloaded on 2020-10-20T17:12Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

NOMINAL SIZE D			3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)		
THREADS PER INCH			16UNC	14UNC	13UNC	12UNC	11UNC	10UNC		
BODY DIAMETER D_E		Max	.3750	.4375	.5000	.5625	.6250	.7500		
		Min	.3287	.3850	.4435	.5016	.5589	.6773		
HEAD DIAMETER A		Max Sharp	.762	.812	.875	1.000	1.125	1.375		
		Min Sharp	.722	.771	.831	.950	1.069	1.306		
		Abs Min	.700	.743	.802	.919	1.035	1.267		
SLOT WIDTH J		Max	.094	.094	.106	.118	.133	.149		
		Min	.081	.081	.091	.102	.116	.131		
FLAT S		Max	.013	.016	.018	.020	.023	.027		
RADIUS R		Max	.125	.143	.154	.167	.182	.200		
FULL HEAD	HEAD HEIGHT H	Max	.230	.223	.223	.260	.298	.372		
		Min	.200	.190	.186	.220	.253	.319		
	SLOT DEPTH T	Max	.106	.103	.103	.120	.137	.171		
		Min	.070	.066	.065	.077	.088	.111		
UNDERCUT HEAD	HEAD HEIGHT H_1	Max	.162	.156	.160	.185	.212	.264		
		Min	.132	.126	.123	.145	.167	.211		
	SLOT DEPTH T_1	Max	.088	.085	.085	.100	.114	.142		
		Min	.070	.066	.065	.077	.088	.111		

	LENGTH L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE	1/8	+0 -1/32				Ⓐ CANCELLED SEE NOTE		
	3/16							
	1/4							
	5/16		114					
	3/8		115	127				
	7/16							
	1/2		116	128	139			
	5/8		117	129	140	150	160	
	3/4		118	130	141	151	161	170
	7/8		119	131	142	152	162	171
	1							
	1-1/4	+0 -1/16	120	132	143	153	163	172
	1-1/2		121	133	144	154	164	173
	1-3/4		122	134	145	155	165	174
	2		123	135	146	156	166	175
Minimum complete thread length of 1-3/4.	2-1/4	+0 -3/32						
	2-1/2		124	136	147	157	167	176
	2-3/4		125	137	148	158	168	177
	3		126	138	149	159	169	178

NOTE: For illustration, material, finish, and other pertinent data, see sheet 1.

Ⓐ CANCELLED. AFTER 19 Dec 1963 USE MS51959 FOR NOMINAL SIZES THRU 3/8 INCH, AND MS24671 FOR LARGER SIZES. INTERCHANGEABILITY RELATIONSHIP MS51959 AND MS24671 can replace the cancelled screws of the same size. The cancelled MS35249 cannot always replace MS51959 or MS24671 and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

APPROVED FEB 9, 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust Ships MOAMA	TITLE SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, NC-2A AND UNC-2A	MILITARY STANDARD MS 35249	
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:	SHEET 2 OF	

DD FORM 1 SEP 57 672-1 (Cooperating)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.