INCH-POUND


MS35335H
8 September 2021
SUPERSEDING
MS35335G
2 February 2004

DETAIL SPECIFICATION SHEET

WASHER, LOCK, FLAT-EXTERNAL TOOTH

This Specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and ASME B18.21.1

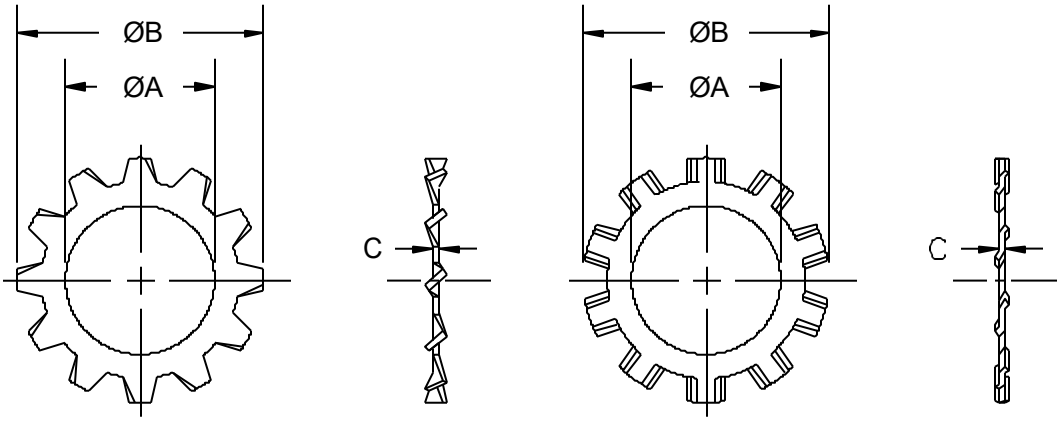

ACCEPTABLE DESIGNS

Figure 1. Lock washer.

Comments, recommendations, additions, deletions, clarifications etc. and any data that may improve this document should be sent to U.S. Army DEVCOM Ground Vehicle System Center, ATTN: FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Detroit Arsenal, MI 48397-5000 or emailed to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST online database at https://assist.dla.mil/.

AMSC N/A FSC 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:21Z
Check the source to verify that this is the current version before use.

TABLE I. Washer sizes and dimensions.

NOMINAL SIZE	∅A INSIDE DIAMETER		∅B OUTSIDE DIAMETER		C THICKNESS		CARBON STEEL	CORROSION RESISTANT STEEL	TIN-BRASS OR PHOSPHOR BRONZE OPTIONAL
							ZINC PLATE	PASSIVATED	UNCOATED
	MAX	MIN	MAX	MIN	MAX	MIN	DASH NO.	DASH NO.	DASH NO.
#4 .112	.123	.115	.260	.245	.018	.012	29	57	85
#6 .138	.150	.141	.320	.305	.022	.016	30	58	86
#8 .164	.176	.168	.381	.365	.023	.018	31	59	87
#10 .190	.204	.195	.410	.395	.024	.018	32	60	88
1/4 .250	.267	.256	.510	.494	.028	.023	33	61	89
5/16 .312	.332	.320	.610	.588	.034	.028	34	62	90
3/8 .375	.398	.384	.694	.670	.040	.032	35	63	91
7/16 .438	.464	.448	.760	.740	.040	.032	36	64	92
1/2 .500	.530	.513	.900	.880	.045	.037	37	65	93
9/16 .562	.596	.576	.985	.960	.045	.037	38	66	94
5/8 .625	.663	.641	1.070	1.045	.050	.042	39	67	95
3/4 .750	.795	.768	1.260	1.220	.055	.047	40	68	96
7/8 .875	.927	.897	1.410	1.380	.060	.052	41	69	97
1 1.000	1.060	1.025	1.620	1.590	.067	.059	42	70	98

REQUIREMENTS:

MATERIAL: Carbon, Steel, UNS G10500 – UNS G10640, hardness 40 - 50 HRC.
Corrosion resistant steel, UNS S41000, hardness 40 - 50 HRC.
Tin-brass, UNS C42500.
Phosphor Bronze, temper H04, ASTM B159/B159M, UNS C51000.

PROTECTIVE COATING: Carbon steel - Mechanically deposited zinc per ASTM B695 class 5, with conversion treatment that is free of hexavalent chromium and meets the type II corrosion resistance.
Corrosion resistant steel - Passivate in accordance with Method 1, Type 8, SAE-AMS2700, or Treatment Nitric 4, or Citric 1 through 5, ASTM A967/A967M, except chromate or hexavalent chrome containing processes are not permitted.

PART NUMBER: The MS part number consists of the MS number, plus the dash number.
Example: MS35335-29

PACKAGING: Packaging shall be in accordance with ASTM D3951.

All dimensions are inches, unless otherwise specified.

The number of teeth shall be at the option of the supplier.

These lock washers shall be used with fasteners having heads large enough to contact lock washerteeth.

In the event of a conflict between the text of this standard and the reference cited herein, the text of standard shall take precedence.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used to identify changes withrespect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:21Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AT
Navy - AS
Air Force – 71
DLA - CQ

Review activities:
Army - AV, CR, CR4, GL, MI
Navy – MC, OS, YD

Preparing activity:
Army - AT

(Project 5310-2021-023)

NOTE: The activities listed above were interested in this document as of the date of document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:21Z
Check the source to verify that this is the current version before use.