INCH-POUND

MS39206G
w/AMENDMENT 1
30 January 2020
SUPERSEDING
MS39206G
30 August 2012

DETAIL SPECIFICATION SHEET

ADAPTERS, STRAIGHT, PIPE TO TUBE - SAFETY SLEEVE COMPRESSION TYPE, MALE PIPE END

Inactive for new design after
29 December 1967.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

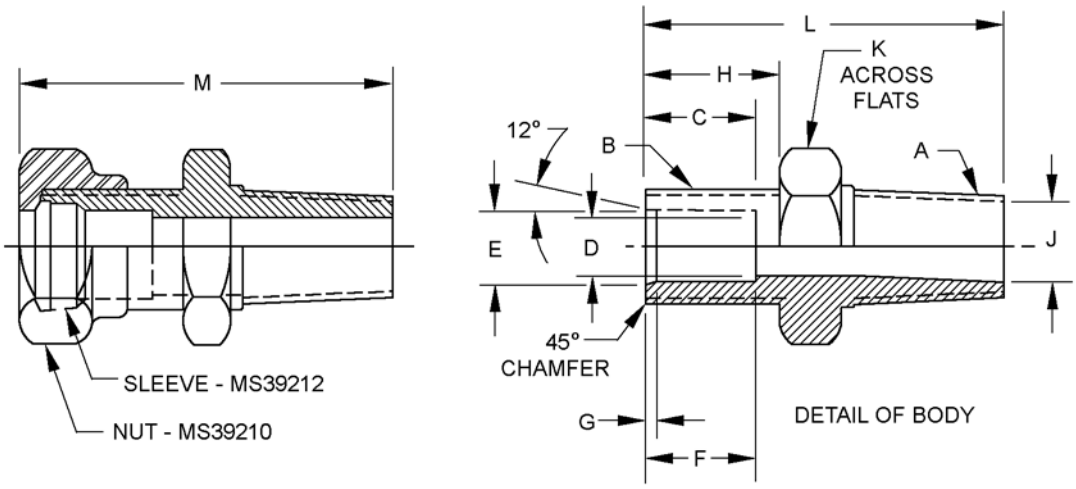


FIGURE 1. Adapters, straight, pipe to tube-safety sleeve compression type, male pipe end.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

Dash No.	Tube O.D.	A Pipe Thread NPTF	B	C Thread Length	D	E
1	1/8	1/8	5/16 24UNF-2A	7/32	3/32	.135 .139
2	3/16	1/8	3/8 24UNF-2A	7/32	1/8	.196 .200
3	1/4	1/8	1/2 20UNF-2A	21/64	13/64	.261 .265
4	5/16	1/8	9/16 18UNF-2A	21/64	13/64	.324 .328
5	1/4	1/4	1/2 20UNF-2A	21/64	13/64	.261 .265
6	5/16	1/4	9/16 18UNF-2A	21/64	13/64	.324 .328
7	3/8	1/4	5/8 18UNF-2A	23/64	9/32	.386 .390
8	1/2	1/4	3/4 16UNF-2A	11/32	27/64	.514 .518
9	1/2	3/8	3/4 16UNF-2A	11/32	27/64	.514 .518
10	5/8	3/8	15/16 16UN-2A	23/64	1/2	.641 .645
11	3/8	1/2	5/8 18UNF-2A	23/64	9/32	.386 .390
12	5/8	1/2	15/16 16UN-2A	23/64	1/2	.641 .645
13	3/4	1/2	1-1/16 16UN-2A	23/64	21/32	.766 .770
14	3/4	3/4	1-1/16 16UN-2A	23/64	21/32	.766 .770
15	7/8	3/4	1-3/16 16UN-2A	23/64	23/32	.891 .895
16	1	3/4	1-5/16 16.UN-2A	23/64	7/8	1.016 1.020
17	7/8	1	1-3/16 16UN-2A	23/64	23/32	.891 .895
18	1	1	1-5/16 16UN-2A	23/64	7/8	1.016 1.020
19	1-1/4	1	1-5/8 16UN-2A	7/16	1-3/32	1.270 1.274
20	1-1/4	1-1/4	1-5/8 16UN-2A	7/16	1-3/32	1.270 1.274
21	1-1/2	1-1/2	1-7/8 16UN-2A	15/32	1-11/32	1.520 1.524

See notes at end of figure.

FIGURE 1. Adapters, straight, pipe to tube-safety sleeve compression type, male pipe end - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

F	G	H	J	K	L	M
13/64	1/8	9/32	3/16	7/16	7/8	1-3/16
1/4	5/32	9/32	3/16	7/16	7/8	1-7/32
19/64	13/64	13/32	3/16	1/2	1	1-13/32
19/64	13/64	13/32	3/16	5/8	1	1-3/8
19/64	13/64	13/32	13/64	5/8	1-5/32	1-9/16
19/64	13/64	13/32	13/64	5/8	1-1/4	1-5/8
19/64	13/64	7/16	9/32	11/16	1-1/4	1-11/16
5/16	13/64	7/16	9/32	3/4	1-1/4	1-25/32
5/16	13/64	7/16	27/64	3/4	1-1/4	1-25/32
11/32	15/64	15/32	13/32	15/16	1-11/32	1-7/8
19/64	13/64	7/16	1/2	7/8	1-19/32	2-1/32
11/32	15/64	15/32	1/2	15/16	1-5/8	2-5/32
11/32	13/64	15/32	1/2	1-1/8	1-39/64	2-13/64
11/32	13/64	15/32	21/32	1-1/8	1-5/8	2-7/32
11/32	13/64	15/32	21/32	1-1/4	1-5/8	2-7/32
13/32	13/64	15/32	21/32	1-3/8	1-5/8	2-7/32
11/32	13/64	15/32	23/32	1-3/8	1-13/16	2-13/32
13/32	13/64	15/32	7/8	1-3/8	1-13/16	2-13/32
13/32	13/64	35/64	29/32	1-5/8	1-7/8	2-9/16
13/32	13/64	35/64	1-3/32	1-11/32	1-29/32	2-17/32
31/64	13/64	35/64	1-11/32	2	2	2-11/16

NOTES:
1. Dimensions are in inches.
2. This illustration is for identification and is not intended to restrict designs or shapes not dimensioned.
3. Tolerances: Unless otherwise specified, decimals ±.005, fractions ±1/64, degrees ±2°.
4. Threads: Threads shall be in accordance with ASME B1.1.

FIGURE 1. Adapters, straight, pipe to tube-safety sleeve compression type, male pipe end. - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Adapters: See table I.

Material:

Code	Material
C	Steel bar, type AISI-C-1112, C-1113, C-1117, C-1118 or C-1137 in accordance with SAE AIR4127.
F	Alloy steel in accordance SAE AIR4127.
S	Corrosion resistant steel in accordance with SAE AMS5659, SAE AMS5862, or, alloy 15-5 PH in accordance with ASTM A564/A564M type XM-12 or UNS S15500 or SAE AMS5665.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

Chemical finish:


Code	Finish
C	Carbon steel: Cadmium in accordance with SAE AMS-QQ-P-416, type II, class 3, 200µ inches to 300µ inches (5.08 µm to 7.62 µm) thick. 1/ 2/
F	Alloy Steel: Cadmium in accordance with SAE AMS-QQ-P-416, type II, class 3, 200µ inches to 300µ inches (5.08 µm to 7.62 µm) thick. 1/ 2/
S	Corrosion resistant steel: Passivate in accordance with SAE AMS2700, type 6 or 7.
Z	Steel, alternative chemical finish: ASTM B633, type VI, FeZn 25. 3/

1/ Cadmium shall not be used in oxygen or potable water systems. Cadmium is prohibited from use in NAVSEA-owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2, unless otherwise approved by NAVSEA. The use of cadmium plating for Army vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement. For new designs PIN codes C and F are not to be supplied to Army and Marine ground forces.

2/ These finishes have a chromate conversion coating or chromic acid rinse which includes hexavalent chromium and are not recommended. The use of coatings depositing hexavalent chromium for Army vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement.

3/ Not for use in aircraft. Requires approval from the Program Office for all applications. Zinc-plated materials should be avoided in hydraulic systems with water-glycol fluids. Reference ASTM MNL37 - Fuels and Lubricants Handbook.

Part or Identifying Number (PIN) example: (PIN covers the complete item with nuts and sleeves.)

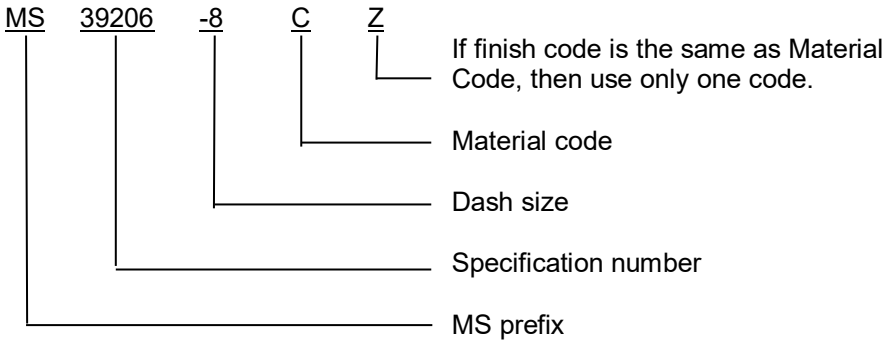

Guidance on use of alternative parts with less hazardous or non-hazardous materials. This specification provides an alternate material, corrosion resistant steel, and Zinc finish via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Cadmium is prohibited from use in NAVSEA-owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2, unless otherwise approved by NAVSEA.

The use of cadmium plating or coatings depositing hexavalent chromium for Army vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement.

For new designs PIN codes C and F are not to be supplied to Army and Marine ground forces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

Class I and II ozone depleting substances (ODS) shall not be used in MS39206 or any referenced procedures.

Tapered pipe thread connections are generally prohibited in high shock applications.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. This document references the following:

MS39210	SAE AMS5659
MS39212	SAE AMS5665
ASME B1.1	SAE AMS5862
ASTM A564/A564M	SAE AMS2700
ASTM B633	SAE AMS-QQ-P-416
ASTM MNL37	T9070-AL-DPC-020/077-2
SAE AIR4127	

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - AS
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2020-014)

Review activities:
Navy - MC, SA, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.