

FED. SUP CLASS
2530

NOTE:
VALVE MOUNTING CLEARANCE SHALL BE PROVIDED ON VEHICLE TO ACCEPT THE MAXIMUM DIMENSIONS SHOWN HEREON.

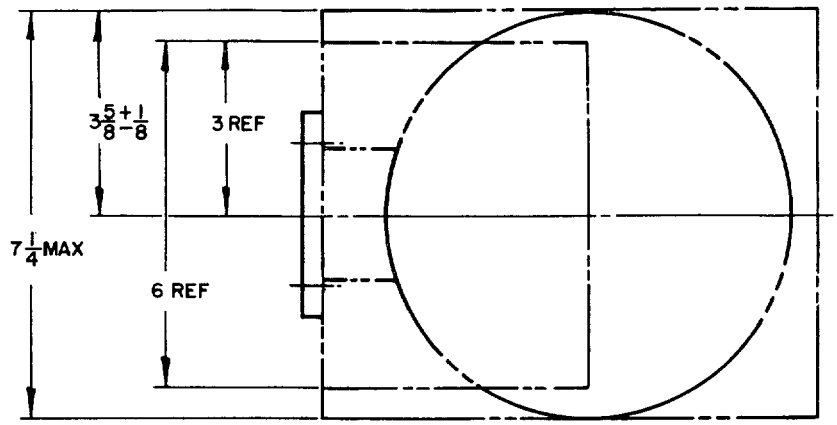

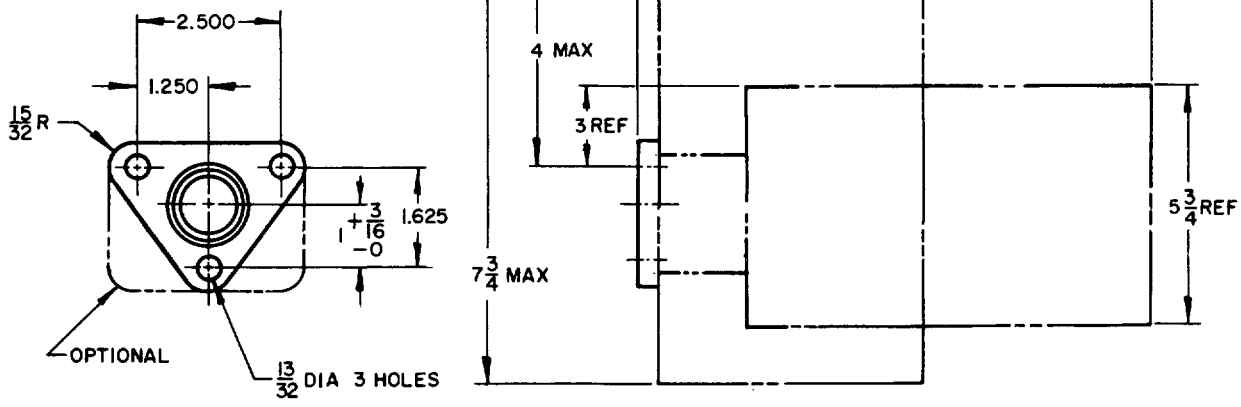

MOUNTING FLANGE

MS PART NO	FORMER PART NUMBERS
MS 53004-1	8330051, 8327378, 7979301, 7411025, 8380978, 8016936, 8327581
MS 53004-2	NONE

Ⓒ DENOTES CHANGES

APPROVED 20 FEB 1962 REVISED Ⓐ 6 JUNE 1962 Ⓑ 2 JUNE 1964 Ⓒ 9 MAY 83

REVIEW ACTIVITIES: DLA-CS
USER ACTIVITIES: ARMY-ME

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. ARMY-AT Other Cust Navy-MC AF-99	TITLE VALVE, RELAY, EMERGENCY-BREAKAWAY, AIR BRAKE	MILITARY STANDARD MS53004
PROCUREMENT SPECIFICATION MIL-V-46704 (AT)	SUPERSEDES: MS 53004 (ORD)	SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 2530-0299

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:19Z
Check the source to verify that this is the current version before use.

NOTES:

1. MS PART NO. MS 53004-1 SHALL BE USED ON INITIAL VEHICLE PRODUCTION ONLY.

2. PART NO. MS 53004-2 SHALL BE THE PART KIT PURCHASED FOR SERVICE SUPPORT AND SHALL CONSIST OF MS 53004-1 AND INCLUDE PROVISION FOR TANK NIPPLE, TANK FLANGE OR REMOTE MOUNTING, PLUS THE FOLLOWING FITTINGS:

   QUANTITY
   - (1) ADAPTER - MS 39179-5 - 1/4 NPTF - w/NUT MS 39196-3 AND SLEEVE MS 39197-3 FOR 3/8 AIR LINE.
   - (2) 90° ELBOW - MS 39182-3 - 1/4 NPTF - w/NUT MS 39196-3 AND SLEEVE MS 39197-3 FOR 3/8 AIR LINE.
   - (1) 90° ELBOW - MS 39182-5 - 3/8 NPTF - w/NUT MS 39196-3 AND SLEEVE MS 39197-3 FOR 3/8 AIR LINE.
   - (1) 90° ELBOW - MS 39182-6 - 3/8 NPTF - w/NUT MS 39196-4 AND SLEEVE MS 39197-4 FOR 1/2 AIR LINE.
   - (C) (4) 90° STREET ELBOW - 144112 - 1/4 NPTF (BRASS OR ZINC COATED).

3. LOCATION OF SERVICE, EMERGENCY, DELIVERY (CYLINDER), RESERVOIR, AND EXHAUST PORTS OPTIONAL. HOWEVER, PORTS SHALL PROVIDE OPTIMUM ACCESS FOR CONNECTION IN ANY OF THE REFERENCED MOUNTING POSITIONS.

4. PORT IDENTIFICATION SHALL BE MARKED WITH LETTERS OF 3/32 MINIMUM HEIGHT, BY STEEL STAMPING, CASTING, OR MOLDING.

5. PORT THREAD DIMENSIONS: SERVICE PORT - 1/4-18 NPTF, ONE (1) MINIMUM REQUIRED; EMERGENCY PORT (CHARGING) - 1/4-18 NPTF, ONE (1) MINIMUM REQUIRED; DELIVERY PORTS (BRAKE) - 1/4-18 NPTF, FOUR (4) MINIMUM REQUIRED; RESERVOIR PORTS - TWO (2) MINIMUM REQUIRED - VALVE MOUNTING PAD PORT 3/4-14 NPTF. THE OTHER RESERVOIR PORT 3/8-18 NPTF.

6. ALL PORTS, EXCEPT ONE (1) SERVICE, ONE (1) EMERGENCY, AND ONE (1) DELIVERY PORT, SHALL BE FITTED WITH METALLIC, DRYSEAL (NPTF) PIPE PLUGS. UNPLUGGED PORTS SHALL BE FITTED WITH CLOSURES TO PREVENT INTRUSION OF DUST AND MOISTURE, AND PROTECT THE THREADS.

7. ALL DESIGNATED VALVE PORTS SHALL BE SO POSITIONED TO ALLOW ASSEMBLY OF NINETY (90°) DEGREE ELBOWS CONFORMING TO MS 39182 (ORD).

(C) 8. THE VALVE SHALL INCLUDE AUTOMATIC MEANS TO GRADUALLY REDUCE TRAILER AIR RESERVOIR AND BRAKE SYSTEM PRESSURE TO ATMOSPHERE WHEN TRAILER IS DETACHED FROM TOWING VEHICLE. THE RATE OF THIS PRESSURE REDUCTION SHALL BE NOT MORE THAN .065 SCFM OR LESS THAN .025 SCFM WHEN MEASURED IN THE RANGE OF 88 TO 82 PSIG.

9. THE VALVE SHALL BE CAPABLE OF MOUNTING IN THE FOLLOWING POSITIONS:
   - (1) DIRECT MOUNTED TO THE RESERVOIR.
   - (2) MOUNTED TO THE RESERVOIR BRACKET.
   - (3) REMOTE MOUNTED.

10. THE FOLLOWING SHALL BE INCLUDED WITH THE VALVE:
   - (1) DIRECTIONS FOR MOUNTING - (NOTE #9).
   - (2) GASKETS, "O" RINGS, ADAPTERS OR REDUCERS AND OTHER ITEMS IF REQUIRED, TOGETHER WITH INSTRUCTIONS FOR THEIR INSTALLATION.
   - (3) A CHECK-LIST FOR USE IN DETERMINING VALVE OPERATION.

11. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.

12. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES, ± 1/32 ON FRACTIONS, ± .005 ON DECIMALS, CASTING DIMENSIONS SHALL BE ± 1/16.

13. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURERS IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

14. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

15. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

16. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS OR REFERENCED DOCUMENTS.

17. FOR INFORMATION OTHER THAN SHOWN HEREON, SEE PROCUREMENT SPECIFICATION.

APPROVED 20 FEB 1962 REVISED (C) FOR CHANGES SEE SHEET 2

P.A. Other Cust	TITLE VALVE, RELAY, EMERGENCY—BREAKAWAY, AIR BRAKE	MILITARY STANDARD MS53004
PROCUREMENT SPECIFICATION MIL-V-46704 (AT)	SUPERSEDES: MS 53004 (ORD)	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITION ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:19Z
Check the source to verify that this is the current version before use.