
FED. SUP CLASS
1670

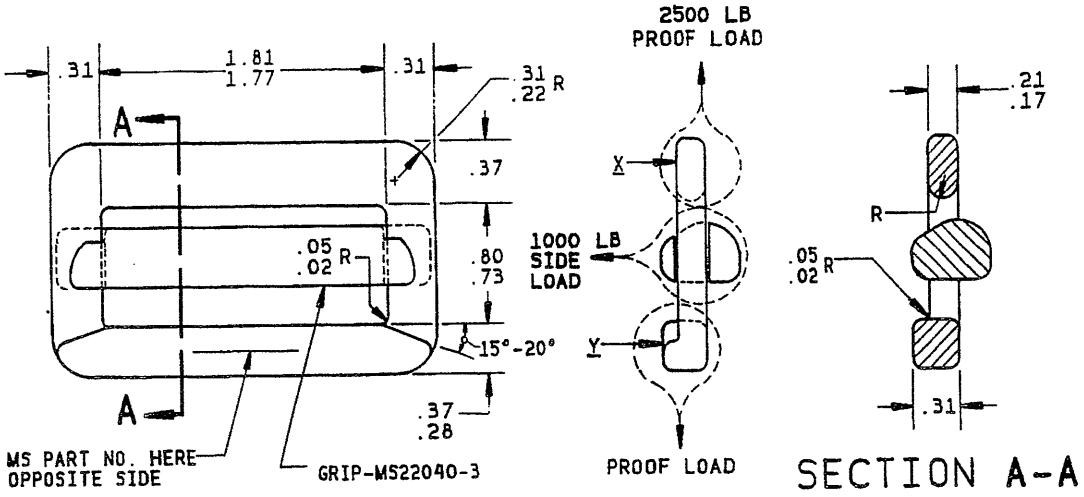

DASH NO.	DESCRIPTION
-1	ASSEMBLY, CADMIUM PLATED
-2	ASSEMBLY, ZINC COATED

NOTES:

MATERIAL: STEEL, MIL-S-5626 OR MIL-S-6049.

METHOD OF FORMING: HOT FORGE.

HEAT TREATMENT: 170,000 TO 190,000 LBS/SQ IN. TENSILE STRENGTH AFTER ASSEMBLY IN ACCORDANCE WITH MIL-H-6875.

SURFACE ROUGHNESS SHALL BE $\sqrt{125}$ MAX. IN ACCORDANCE WITH ANSI B46.1.

FINISH: -1 --- CADMIUM PLATE, QQ-P-416, CLASS 1, TYPE I.*
-2 --- COATING, IMMERSION ZINC FLAKE/CHROMATE DISPERSION PER MIL-C-87115, CLASS 3.
*AS AN ALTERNATE, THE COATING FOR THE -2 FINISH MAY BE USED.

ADAPTERS SHALL BE SUBJECTED TO A 2500 POUND PROOF LOAD AND A 1000 POUND SIDE LOAD AS INDICATED BY ARROWS IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION. ADAPTER TO BE SUPPORTED AT POINTS X AND Y FOR SIDE LOAD.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED HEREIN, TOLERANCES ± .03.

ALL PERPENDICULAR SURFACES SHALL INTERSECT WITH A .04-.11 RADIUS UNLESS OTHERWISE SPECIFIED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 70114-1.

Ⓑ REDRAWN; REVISED: FINISH NOTE. ADDED: PART NUMBER NOTE AND SHEET 2.

APPROVED Ⓑ REVISED 30 APRIL 1986

USER ACTIVITIES: ARMY-AV NAVY-MC

REVIEWER ACTIVITIES: USAF-82,99

AMSC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. ARMY-GL Other Cust NAVY-AS USAF-11	INTERNATIONAL INTEREST	TITLE ADAPTER, QUICK FIT, PARACHUTE HARNESS	MILITARY STANDARD MS 70114
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AF DWG 48A7053		SHEET 1 OF 2


DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 1670-0559

Source: https://assist.dla.mil -- Downloaded: 20260-23T20:25Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1670

END ITEM EXAMINATION
DIMENSION - FUNCTION TEST

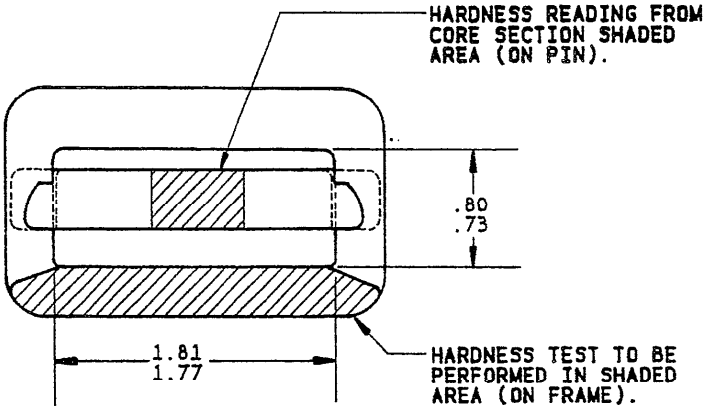

NOTES:

CRITICAL DIMENSIONS: AS SHOWN.

CRITICAL FUNCTIONAL TEST: GRIP BAR SHALL MOVE FREELY.

(B) THIS SHEET ADDED.

APPROVED (B) 30 APRIL 1986 REVISED

USER ACTIVITIES: ARMY-AV NAVY-MC

REVIEWER ACTIVITIES: USAF-82,99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. ARMY-GL Other Cust NAVY-AS USAF-11	INTERNATIONAL INTEREST	TITLE ADAPTER, QUICK FIT, PARACHUTE HARNESS	MILITARY STANDARD MS 70114
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AF DWG 48A7053		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 20240-23T20:25Z
Check the source to verify that this is the current version before use.