
FED. SUP CLASS
5306

MS9497

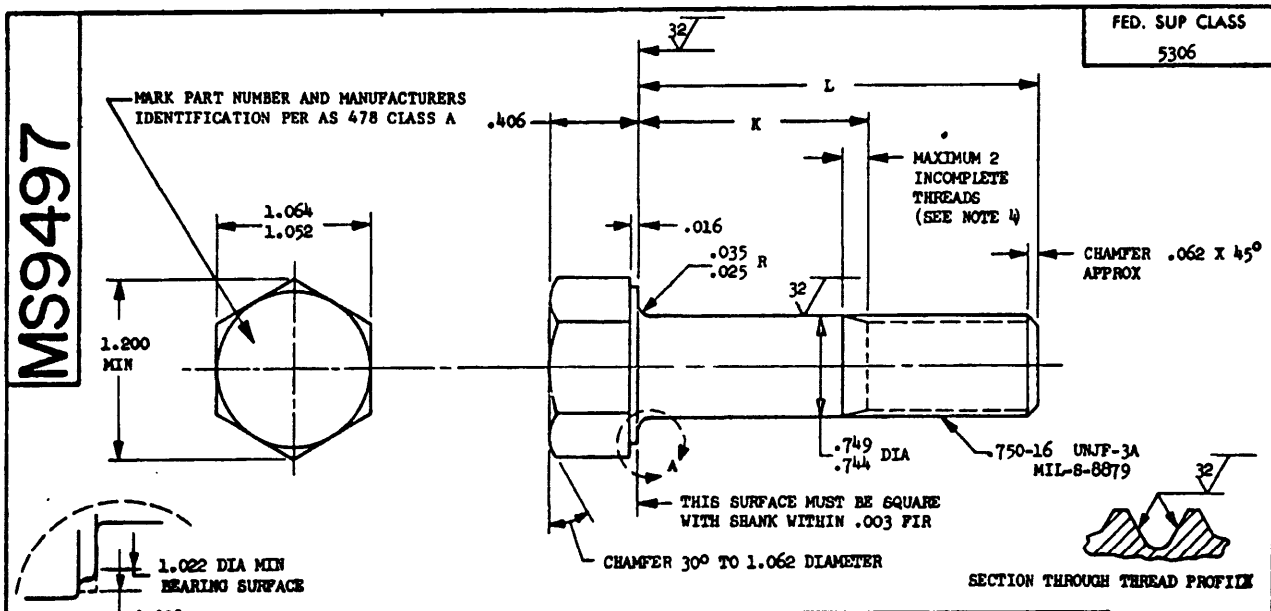

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9497-06	1.250	.129-.149	26.90
MS9497-07	1.312	.129-.149	27.68
MS9497-08	1.375	.129-.149	28.47
MS9497-09	1.438	.129-.149	29.25
MS9497-10	1.500	.129-.149	30.03
MS9497-11	1.562	.129-.149	30.81
MS9497-12	1.625	.129-.149	31.60
MS9497-13	1.688	.129-.149	32.38
MS9497-14	1.750	.129-.149	33.16
MS9497-15	1.812	.129-.149	33.95
MS9497-16	1.875	.129-.149	34.73
MS9497-17	1.938	.129-.188	35.51
MS9497-18	2.000	.190-.250	36.29
MS9497-19	2.125	.315-.375	37.86
MS9497-20	2.250	.440-.500	39.42
MS9497-21	2.375	.565-.625	40.99
MS9497-22	2.500	.690-.750	42.55
MS9497-23	2.625	.815-.875	44.12
MS9497-24	2.750	.940-1.000	45.78
MS9497-25	2.875	1.065-1.125	47.25
MS9497-26	3.000	1.190-1.250	48.81
MS9497-27	3.125	1.315-1.375	50.48
MS9497-28	3.250	1.440-1.500	51.94
MS9497-29	3.375	1.565-1.625	53.50
MS9497-30	3.500	1.690-1.750	55.07

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9497-31	3.625	1.815-1.875	56.63
MS9497-32	3.750	1.940-2.000	58.20
MS9497-33	3.875	2.065-2.125	59.76
MS9497-34	4.000	2.190-2.250	61.33
MS9497-35	4.125	2.315-2.375	62.89
MS9497-36	4.250	2.440-2.500	64.46
MS9497-37	4.375	2.565-2.625	66.02
MS9497-38	4.500	2.690-2.750	67.59
MS9497-39	4.625	2.815-2.875	69.15
MS9497-40	4.750	2.940-3.000	70.72
MS9497-41	4.875	3.065-3.125	72.28
MS9497-42	5.000	3.190-3.250	73.85
MS9497-43	5.125	3.315-3.375	75.41
MS9497-44	5.250	3.440-3.500	76.98
MS9497-45	5.375	3.565-3.625	78.54
MS9497-46	5.500	3.690-3.750	80.11
MS9497-47	5.625	3.815-3.875	81.67
MS9497-48	5.750	3.940-4.000	83.23
MS9497-49	5.875	4.065-4.125	84.80
MS9497-50	6.000	4.190-4.250	86.36

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .032 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5731. © REINSTATED 23 NOV 84
6. MANUFACTURING SPECIFICATION: AMS 7477.
7. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
8. SURFACE TEXTURE: USAS B46.1-1962 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON
9. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 5 May 1965 REVISED (A) 17 Nov 69 (B) 21 DEC 83 © 23 NOV 84

User activities:

Review activities:
© AIR FORCE-82
DLA-IS

s military standard is approved for use by all Departments and Agencies of the Department of Defense.
ction for all new engineering and design applications and for repetitive use shall be made from this
ument when applicable.

P.A. AS Other Cust © AV 99	INTERNATIONAL INTEREST ©	TITLE BOLT, MACHINE - HEXAGON HEAD, FULL SHANK, AMS 5731, .750-16 UNJF-3A	MILITARY STANDARD MS9497
PROCUREMENT SPECIFICATION NUMBER		SUPERSEDES:	PAGE 1 OF 1

DD FORM 672-1 (Cancelled) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0902

Source (redacted): https://assist.dla.mil -- Downloaded: 2026-10-23T13:18Z
Check the source to verify that this is the current version before use.