
MS9960

FED. SUP CLASS
5306

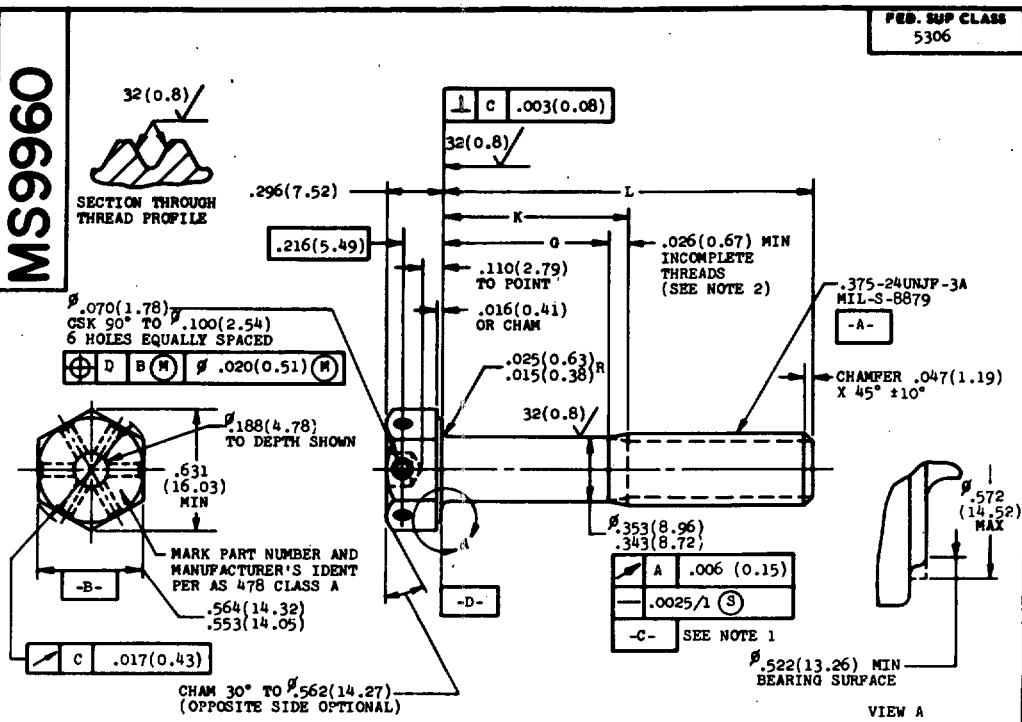

1. FOR PART NUMBERS MS9960-03 THRU MS9960-21 THE THREAD PD SHALL REPLACE DATUM C.
2. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. MATERIAL: STEEL AMS 6322.
4. HARDNESS: ROCKWELL C26-32.
5. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
6. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
7. HEAD TO SHANK FILLET SHALL BE COLD WORKED.
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
9. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES (3.2 MICROMETERS) EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. METRIC CONVERSIONS ARE IN PARENTHESES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010 (0.25). ANGULAR DIMENSIONS ±5°. INTERNATIONAL SYSTEM UNITS (SI) SHOWN ARE FOR REFERENCE ONLY.
12. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966, Ø = DIAMETER.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 27 Jun 74 REVISED

User activities: Army, Navy, Air Force, DSA

Review activities: Army, Navy, Air Force, DSA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Air Force - 11 Other Cust Army - AV Navy - AS	TITLE BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .375-24UNJF-3A	MILITARY STANDARD MS9960
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5306-0495

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.

MS9960

FED. SUP CLASS 5306

Review activities: Army, Navy, Air Force, DLA

User activities: Army, Navy, Air Force, DLA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PART NUMBER	L		G MIN		K MAX		APPROX MASS	
	IN.	(mm)	IN.	(mm)	IN.	(mm)	LB/100	kg/100
MS9960-03	.562	14.27	.025	0.64	.108	2.74	3.52	1.597
MS9960-04	.625	15.88	.025	0.64	.108	2.74	3.69	1.674
MS9960-05	.688	17.48	.025	0.64	.108	2.74	3.86	1.751
MS9960-06	.750	19.05	.025	0.64	.108	2.74	4.02	1.823
MS9960-07	.812	20.62	.025	0.64	.108	2.74	4.19	1.900
MS9960-08	.875	22.22	.025	0.64	.108	2.74	4.36	1.978
MS9960-09	.938	23.82	.025	0.64	.108	2.74	4.53	2.055
MS9960-10	1.000	25.40	.025	0.64	.108	2.74	4.70	2.132
MS9960-11	1.062	26.97	.025	0.64	.108	2.74	4.86	2.204
MS9960-12	1.125	28.58	.025	0.64	.125	3.17	5.03	2.282
MS9960-13	1.188	30.18	.045	1.15	.188	4.77	5.20	2.359
MS9960-14	1.250	31.75	.107	2.72	.250	6.35	5.37	2.436
MS9960-15	1.312	33.32	.169	4.30	.312	7.92	5.54	2.513
MS9960-16	1.375	34.92	.232	5.90	.375	9.52	5.70	2.585
MS9960-17	1.438	36.52	.295	7.50	.438	11.12	5.87	2.662
MS9960-18	1.500	38.10	.357	9.07	.500	12.70	6.04	2.740
MS9960-19	1.562	39.67	.419	10.65	.562	14.27	6.21	2.817
MS9960-20	1.625	41.28	.482	12.2[illegible]	.625	15.88	6.38	2.894
MS9960-21	1.688	42.88	.545	13.[illegible]	.688	17.47	6.54	2.966
MS9960-22	1.750	44.45	.607	15.[illegible]2	.750	19.05	6.71	3.044
MS9960-23	1.812	46.02	.669	17.[illegible]	.812	20.62	6.88	3.121
MS9960-24	1.875	47.62	.732	18.[illegible]	.875	22.22	7.05	3.198
MS9960-25	1.938	49.22	.795	20.2[illegible]	.938	23.82	7.22	3.275
MS9960-26	2.000	50.80	.857	2[illegible].77	1.000	25.40	7.38	3.348
MS9960-27	2.125	53.98	.982	2[illegible].35	1.125	28.57	7.72	3.502
MS9960-28	2.250	57.15	1.107	2[illegible].12	1.250	31.75	8.06	3.656
MS9960-29	2.375	60.32	1.232	.30	1.375	34.92	8.39	3.806
MS9960-30	2.500	63.50	1.357	.47	1.500	38.10	8.73	3.960

PART NUMBER	L		G MIN		K MAX		APPROX MASS	
	IN.	(mm)	IN.	(mm)	IN.	(mm)	LB/100	kg/100
MS9960-31	2.625	66.68	1.482	37.65	1.625	41.27	9.06	4.110
MS9960-32	2.750	69.85	1.607	40.82	1.750	44.45	9.40	4.264
MS9960-33	2.875	73.02	1.732	44.00	1.875	47.62	9.74	4.418
MS9960-34	3.000	76.20	1.857	47.17	2.000	50.80	10.07	4.568
MS9960-35	3.125	79.38	1.982	50.35	2.125	53.97	10.41	4.722
MS9960-36	3.250	82.55	2.107	53.52	2.250	57.15	10.74	4.872
MS9960-37	3.375	85.72	2.232	56.70	2.375	60.32	11.08	5.026
MS9960-38	3.500	88.90	2.357	59.87	2.500	63.50	11.42	5.180
MS9960-39	3.625	92.08	2.482	63.05	2.625	66.67	11.75	5.330
MS9960-40	3.750	95.25	2.607	66.22	2.750	69.85	12.09	5.484
MS9960-41	3.875	98.42	2.732	69.40	2.875	73.02	12.42	5.634
MS9960-42	4.000	101.60	2.857	72.57	3.000	76.20	12.76	5.788
MS9960-43	4.125	104.78	2.982	75.75	3.125	79.37	13.10	5.942
MS9960-44	4.250	107.95	3.107	78.92	3.250	82.55	13.43	6.092
MS9960-45	4.375	111.12	3.232	82.10	3.375	85.72	13.77	6.246
MS9960-46	4.500	114.30	3.357	85.27	3.500	88.90	14.10	6.397
MS9960-47	4.625	117.48	3.482	88.45	3.625	92.07	14.44	6.550
MS9960-48	4.750	120.65	3.607	91.62	3.750	95.25	14.78	6.704
MS9960-49	4.875	123.82	3.732	94.80	3.875	98.42	15.11	6.854
MS9960-50	5.000	127.00	3.857	97.97	4.000	101.60	15.45	7.008
MS9960-51	5.125	130.18	3.982	101.15	4.125	104.77	15.78	7.158
MS9960-52	5.250	133.35	4.107	104.32	4.250	107.95	16.12	7.312
MS9960-53	5.375	136.52	4.232	107.50	4.375	111.12	16.46	7.466
MS9960-54	5.500	139.70	4.357	110.67	4.500	114.30	16.79	7.616
MS9960-55	5.625	142.88	4.482	113.85	4.625	117.47	17.13	7.770
MS9960-56	5.750	146.05	4.607	117.02	4.750	120.65	17.46	7.920
MS9960-57	5.875	149.22	4.732	120.20	4.875	123.82	17.80	8.074
MS9960-58	6.000	152.40	4.857	123.37	5.000	127.00	18.14	8.228

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATION.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 27 Jun 74 REVISED

P.A. Air Force – 11
Other Cust
Army – AV
Navy – AS

TITLE: BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PS SHANK, STEEL AMS 6322, CADMIUM PLATED, .375-24UNJF-3A

MILITARY STANDARD
MS9960

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 2 OF 2

DD FORM 672-1 (SEP 87)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5306-0495

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/7751

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.