
MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, ELECTROLYTIC (SOLID ELECTROLYTE), TANTALUM, POLAR, MOLDED, DUAL-IN-LINE PACKAGE, STYLE CX04

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-49137.



CIRCUIT DIAGRAM

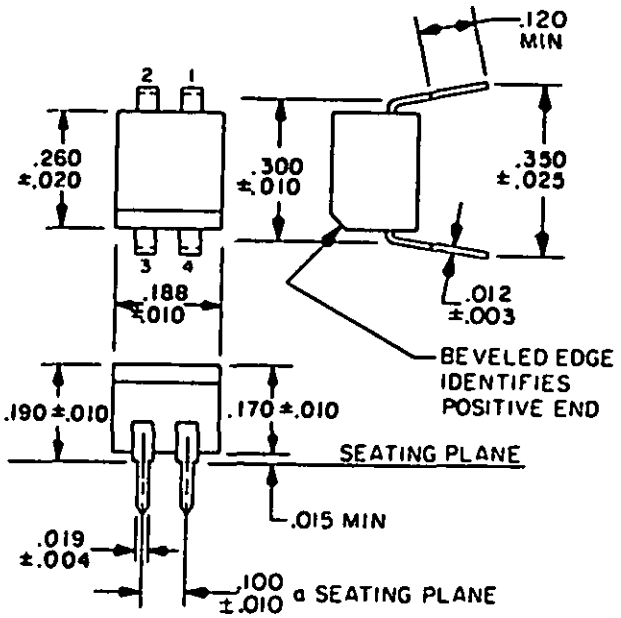

INCHES	MM	INCHES	MM
.003	.08	.100	2.54
.004	.10	.120	3.05
.010	.25	.170	4.32
.012	.30	.188	4.78
.015	.38	.190	4.83
.019	.48	.260	6.60
.020	.51	.300	7.62
.025	.64	.350	8.89

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration.

Ⓑ denotes change

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

TABLE I. Style CX04 characteristics.

Type designation 1/	DC rated voltage (85°C)	Cap. (nom)	DC leakage (max)		Dissipation factor			Case size
			25°C	85°C	-55°	25°	85°	
	Volts	µF	µA	µA	%	%	%	
CX04F336-	10	33	2.0	20.0	12	6	9	See fig. 1
CX04H226-	15	22	2.0	20.0	12	6	9	
CX04J156-	20	15	2.0	20.0	12	6	9	
CX04M685-	35	6.8	2.0	20.0	12	6	9	

1/ Complete type designation will include an additional symbol indicating capacitance tolerance.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Case type: Molded.
Terminals: Solder-coated metal.
DC rated voltage: See table I.
Operating temperature: -55° to +85°C.

Capacitance (cap.): See table I. Test frequency: 120 Hz.
Cap. tolerance: ±10% (K) or ±20% (M).

Dissipation factor (DF): See table I. DF shall be measured at 120 Hz.

Terminal strength:
Pull test: Test condition A of method 211 of MIL-STD-202 per MIL-C-49137.
(B) Flat-terminal bend test: Test condition B of method 211 of MIL-STD-202; two bends.

Stability at low and high temperature: In accordance with MIL-C-49137.

Step 1 (+25°C):	DCL	- See table I.
	Cap.	- Within tolerance of table I value.
	DF	- See table I.
Step 2 (-55°C):	ΔCap.	- Within 10 percent of step 1 measured value.
	DF	- See table I.
Step 3 (+25°C):	DCL	- See table I.
	ΔCap.	- Within 10 percent of step 1 measured value.
	DF	- See table I.
Step 4 (+85°C):	DCL	- See table I.
	ΔCap.	- Within 10 percent of step 1 measured value.
	DF	- See table I.
Step 5 (+25°C):	DCL	- See table I.
	ΔCap.	- Within 10 percent of step 1 measured value.
	DF	- See table I.

Surge voltage: In accordance with MIL-C-49137.
DCL - See table I, at 25°C.
ΔCap. - Within 10 percent of initial value.
DF - See table I, at 25°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

Life: Method 108 of MIL-STD-202.
1,000 hours:
At 250°C: DCL - 200 percent of initial requirement.
ΔCap. - Within 10 percent of initial measured value.
DF - See table I.

NOTE:
1. These capacitors are intended to be used only where supplemental moisture protection is provided or for noncritical applications where hermetic moisture protection is not required.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Navy - SH
Air Force - 17, 85, 99
DLA - ES

User activities:
Navy - MC, AS, OS, CG
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1330-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE: MIL-C-49137/4B CAPACITORS, FIXED, ELECTROLYTIC (SOLID ELECTROLYTE), TANTALUM, POLAR, MOLDED, DUAL-IN-LINE PACKAGE, STYLE CX04

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1426 CT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Cdr, US Army ERADCOM
ATTN: DELET-R-S
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.