MILITARY SPECIFICATION

CASE, CARRYING: 10527433

This amendment forms a part of Military Specification MIL-C-60623(MU), dated 30 November 1966.

Paragraph 2.1: Delete: "MMM-A-132 Adhesives, Heat Resistant, Airframe Structural, Metal to Metal".

Paragraph 3.5.1.2: Delete in entirety and substitute the following:

"3.5.1.2 Bonding of extrusions. - The extrusions shall be attached to the case shells with adhesive conforming to Dow Chemical Co. RTV735 with primer 1200. The extrusion shall be tool rolled and crimped on the sides and ends to assure positive attachment to the case shells. Corner radii of extrusions shall not be tool rolled or crimped."

Delete: "Figures 3, 4 and 8" and substitute attached "Figures 3, 4 and 8."

Custodian

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A302Y

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3. STARTING THICKNESS-.187
COLOR-OLIVE DRAB, NO. X24087 OF FED-STD-595
FINISH - EXTERIOR - HAIRCELL GRAIN
INTERIOR (OPTIONAL) - HAIRCELL GRAIN OR SMOOTH
FORMED WALL THICKNESS - .120 +.020 -.030

2. TOLERANCES - DECIMALS ± .03
FRACTIONS ± 1/32
ANGLES +1°, -0°

SUGGESTED MATERIAL SOURCE.
U.S. RUBBER CO., CHICAGO, ILLINOIS
PART NO. R40-4313-CPA-1492


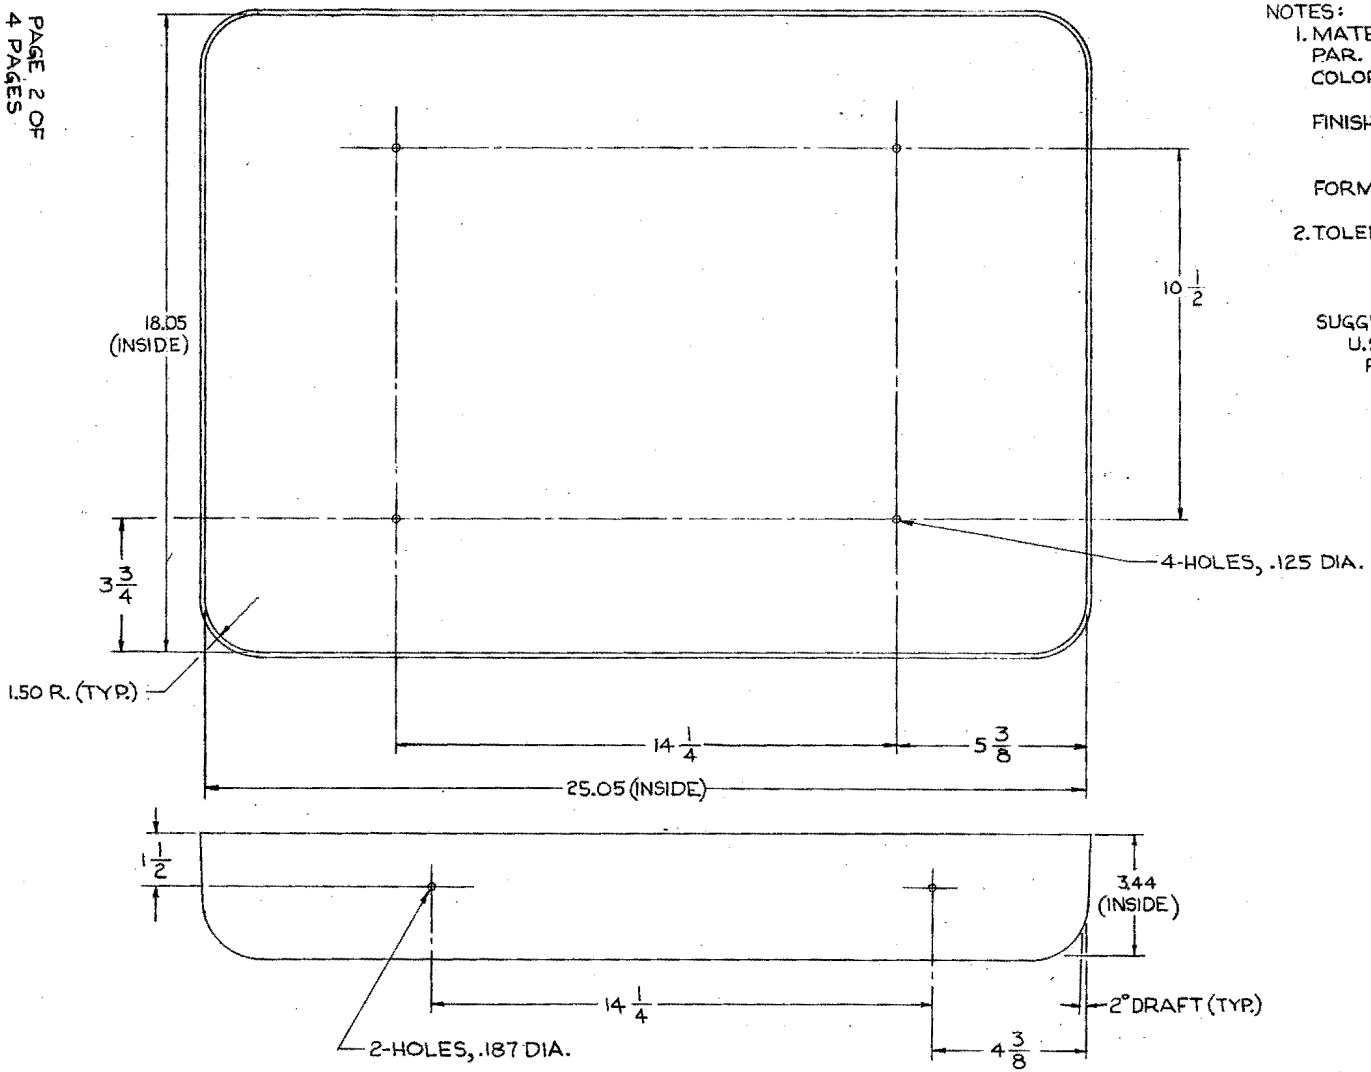


FIGURE 3 - SHELL, BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

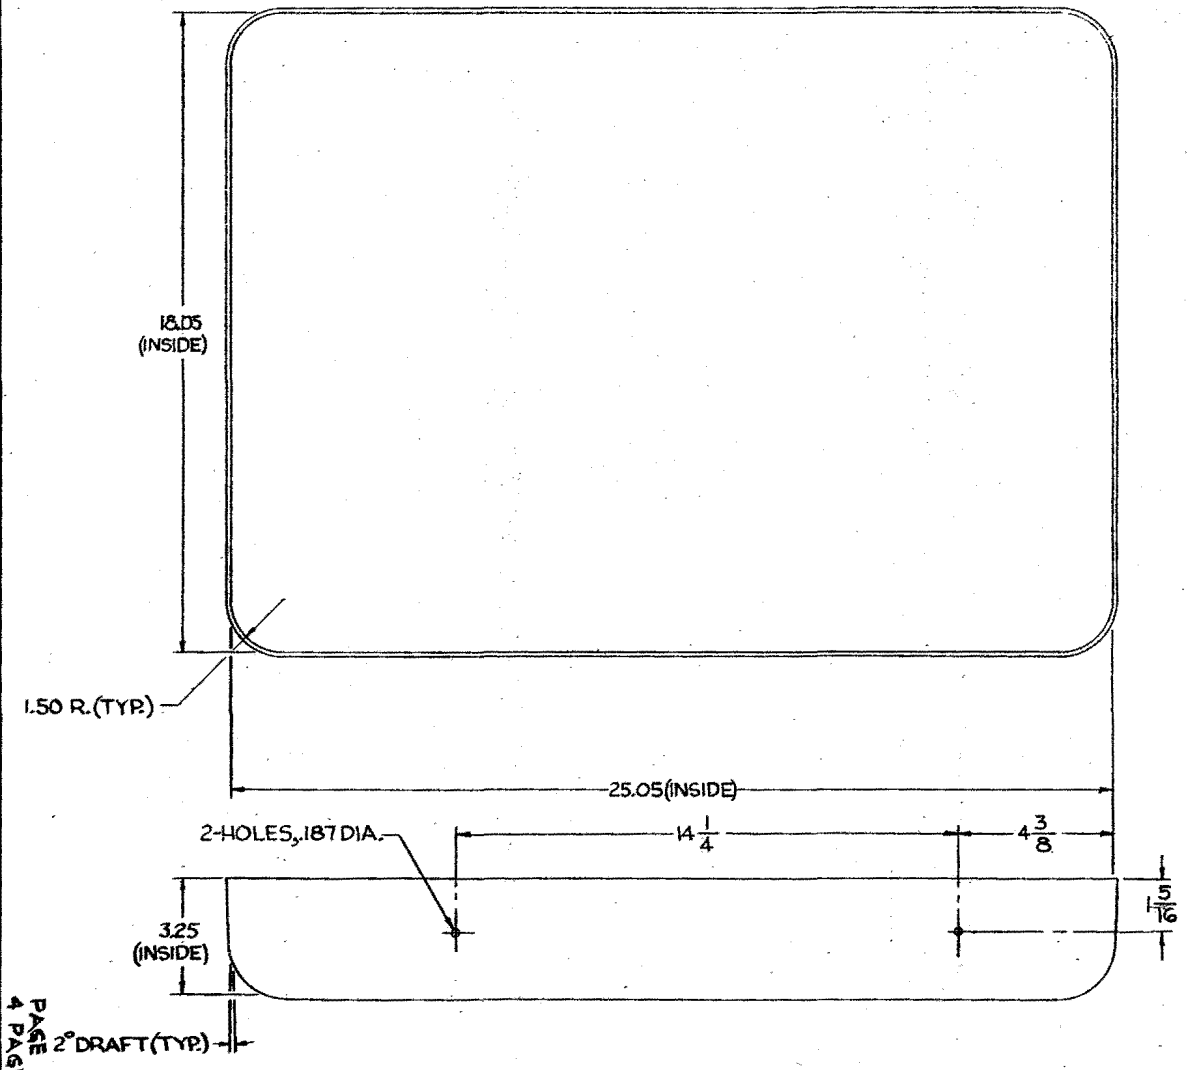

NOTES:


1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3. STARTING THICKNESS-.187
   COLOR-OLIVE DRAB, NO. X24087 OF FED-STD-595
   FINISH-EXTERIOR-HAIRCELL GRAIN
   INTERIOR (OPTIONAL)-HAIRCELL GRAIN OR SMOOTH
   FORMED WALL THICKNESS .120 $^{+.020}_{-.030}$

2. TOLERANCES- DECIMALS ±.03 ·
   FRACTIONS ±1/32
   ANGLES +1°, -0°

SUGGESTED MATERIAL SOURCE
U.S. RUBBER CO., CHICAGO, ILLINOIS
PART NO. R40-4313-CPA-1492

FIGURE 4-SHELL, COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

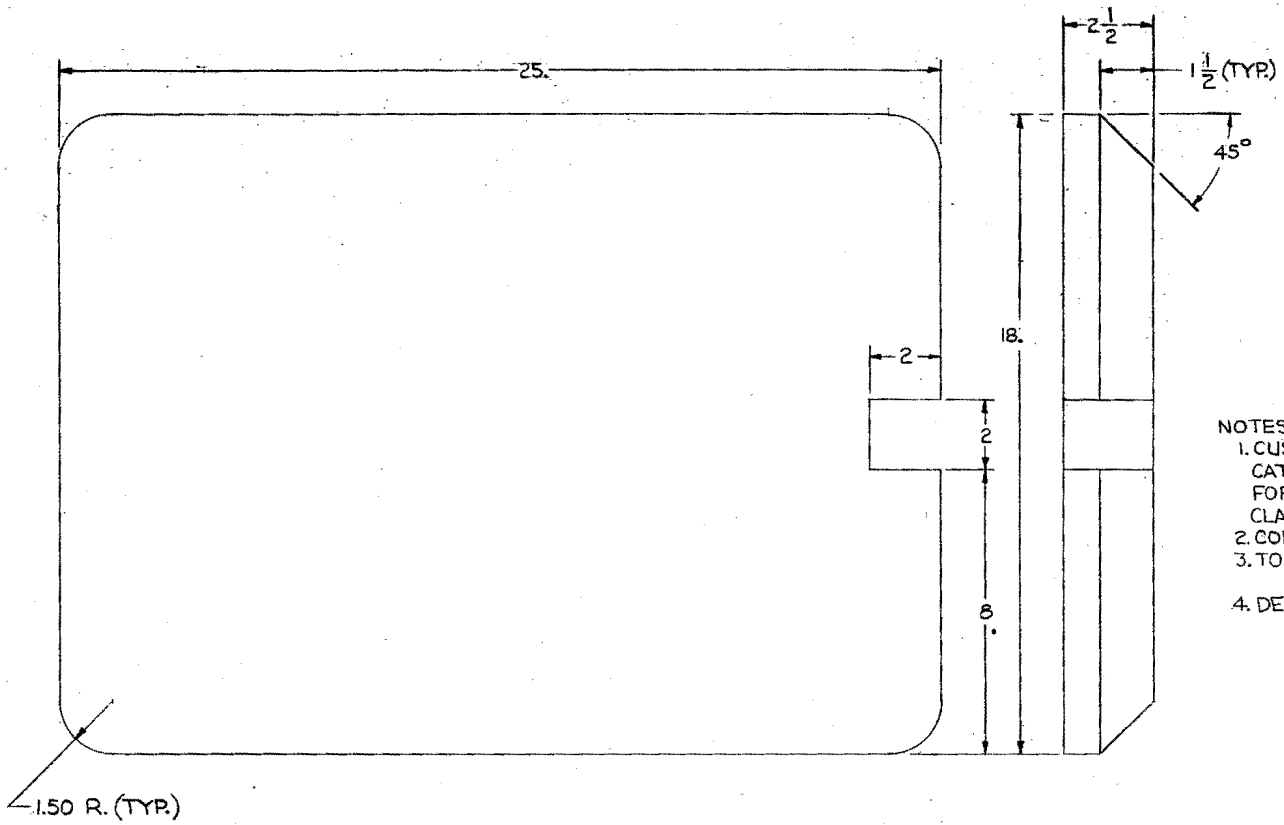

NOTES:
1. CUSHION HOLD DOWN SHALL BE FABRICATED OF POLYURETHANE, POLYESTER FORMULATION CONFORMING TO TYPE I, CLASS 2 OF MIL-P-26514.
2. COLOR-CHARCOAL BLACK OR GRAY.
3. TOLERANCES-FRACTIONS ±1/16
   ANGLES ±3°
4. DENSITY-1.8 LBS./CU. FT.

FIGURE 8 - CUSHION HOLD DOWN

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.