INCH-POUND


MIL-C-55302/78C(USAF)
2 March 1989
SUPERSEDING
MIL-C-55302/78B(USAF)
26 September 1975

# MILITARY SPECIFICATION SHEET

## CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: KEY, POLARIZING, CONNECTORS, ELECTRICAL PRINTED WIRING BOARDS

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55302.

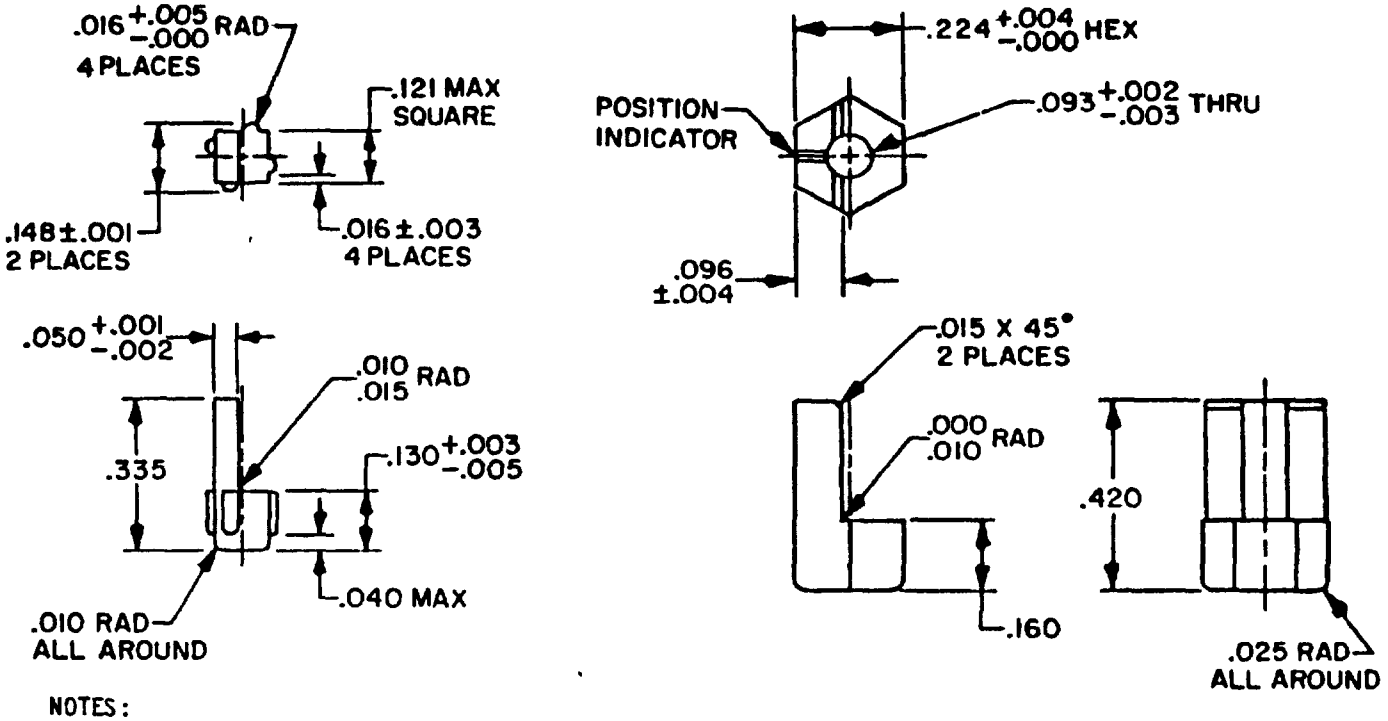


NOTES:
1. Material: Glass filled acetal plastic in accordance with MIL-P-46137.
2. Installs in MIL-C-55302/74, MIL-C-55302/75, and MIL-C-55302/166 through MIL-C-55302/170.

Square polarization

Patent number 3,611,272

NOTES:
1. Material: In accordance with L-P-410 (nylon 6/10).
2. Installs in MIL-C-55302/72 and MIL-C-55302/73.

Hex polarization


Patent number 3,582,867

FIGURE 1. Key, polarizing.

© denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

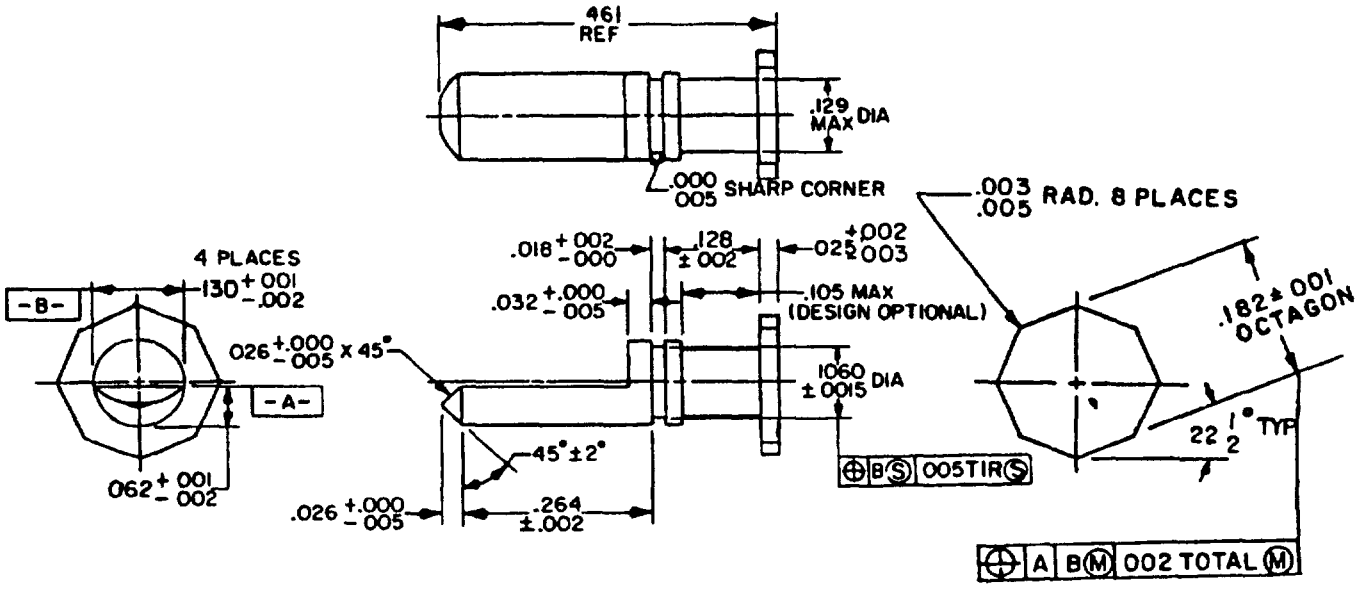


NOTES:
1. All dimensions before coating.
2. Material is aluminum AMS 4150
3. Coating: Anodize AMS 2470.
4. Installs in MIL-C-55302/76.


Polarization pin

Patent number 3,714,617

FIGURE 1. Key, polarizing - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

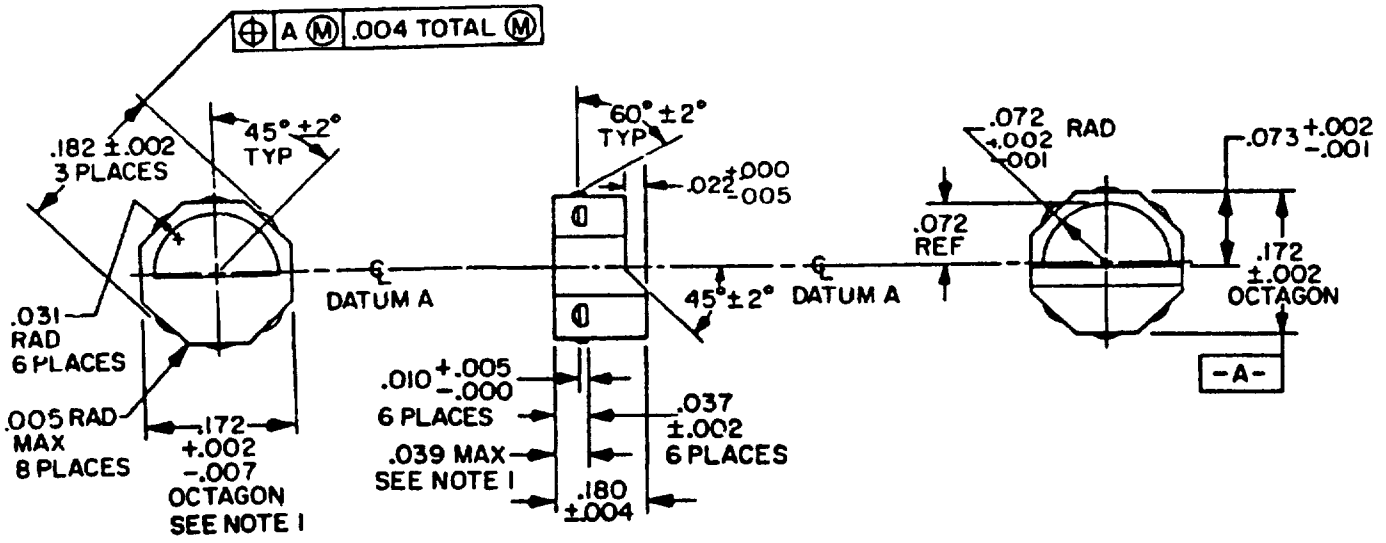


NOTES:
1. Indicated dimension applies for indicated length.
2. Material is in accordance with L-P-410 (nylon 6/6).
3. Installs in MIL-C-55302/77.

Bushing, polarization, octagon, molded

Patent number 3,714,617

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .001 | 0.03 | .015 | 0.38 | .037 | 0.94 | .096 | 2.44 | .160 | 4.06 |
| .0015 | 0.038 | .016 | 0.41 | .039 | 0.99 | .105 | 2.67 | .172 | 4.37 |
| .002 | 0.05 | .018 | 0.46 | .040 | 1.02 | .1060 | 2.692 | .180 | 4.57 |
| .003 | 0.08 | .022 | 0.56 | .050 | 1.27 | .121 | 3.07 | .182 | 4.62 |
| .004 | 0.10 | .025 | 0.64 | .058 | 1.47 | .128 | 3.25 | .224 | 5.69 |
| .005 | 0.13 | .026 | 0.66 | .072 | 1.83 | .129 | 3.28 | .264 | 6.71 |
| .007 | 0.18 | .031 | 0.79 | .073 | 1.85 | .130 | 3.30 | .335 | 8.51 |
| .010 | 0.25 | .032 | 0.81 | .093 | 2.36 | .141 | 3.58 | .420 | 10.67 |
| | | | | | | .148 | 3.76 | .463 | 11.76 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm)

FIGURE 1. Key, polarizing - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: See notes on figure 1.

Part number: M55302/78-(dash number from table I).

Used in connectors: See notes on figure 1.

TABLE I. Dash numbers.

| Dash number | Description |
|---|---|
| 01 | Hex, polarization |
| 02 | Square, polarization |
| 03 | Bushing, polarization |
| 04 | Pin, polarization |

Patent numbers 3,582,867 and 3,611,272. The Government has a royalty free license under these patents for the benefit of manufacturers of the items either for the Government or for use in equipment to be delivered to the Government.

Note: Retention of qualification requirements: Not applicable.

CONCLUDING MATERIAL

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 85, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-F344-1)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.