MIL-F-63229 (AR)
AMENDMENT 2
26 APRIL 1984
SUPERSEDING
AMENDMENT 1
8 September 1983

MILITARY SPECIFICATION

FUZE, PIBD, XM740, SHOCK WAVE SENSOR FOR

This amendment forms a part of Military Specification MIL-F-63229 (AR) dated 17 August 1979, and is approved for use by the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Title Block: Add "(M740)" to title and wherever it appears in this specification.

2.1, SPECIFICATIONS, FEDERAL:

* Delete:

"PPP-T-97 - Tape, Pressure Sensitive, Adhesive, Filament Reinforced".

* Add:

"PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

PPP-T-60 - Tape, Packaging, Waterproof"

PAGE 2

* Other Publications: Delete: "AR700-15 Packaging of Material."

3.2.2: Delete in its entirety and substitute the following:

"3.2.2 Environmental conditions. Except for temperature tests, these conditions apply with the SWS mounted in a carrier or a test fixture which simulates the mounting of the SWS by its normal means in its normal position in the projectile."

FSC 1390

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

3.2.2.2: Delete in its entirety and substitute the following:

"3.2.2.2 Low temperature. The SWS shall meet the performance requirements specified in 3.2.1 when stabilized at temperatures down to -25.°F"

PAGE 3

3.2.2.3, line 2: Delete "3.2.2" and substitute "3.2.1".

3.2.2.8, line 1: Delete "Low g acceleration" and substitute "Lateral acceleration."

line 4: Delete the word "forces".

PAGE 4

Figure 1: Delete in its entirety and substitute the following:

PAGE 6

4.4.2.2, line 6: Add "The test samples can be used as deliverable units."

PAGE 7

4.5.7.1, line 1: Delete "±5°F" and substitute "+5, -0°F".

4.5.7.2, Delete in its entirety and substitute the following:

"4.5.7.2 Low Temperature The SWS shall be conditioned at -25, +0, -5°F for a minimum of one hour. While at temperature the units shall be tested as specified in 4.5.2."

4.5.7.3, line 2: Delete "mounted in a carrier" and substitute "mounted in a carrier in accordance with 3.2.2."

line 3: Delete "±5°F" and substitute "+5, -0°F".

line 7: Delete "±5°F" and substitute "+5, -0°F".

PAGE 8


4.5.7.4, line 2: Delete "mounted in a carrier" and substitute "mounted in a carrier in accordance with 3.2.2."


line 3: Delete "±5°F" and substitute "+0, -5°F".


line 7: Delete "±5°F" and substitute "+0, -5°F".

line 8: Delete "4.5.2.2" and substitute "4.5.2".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

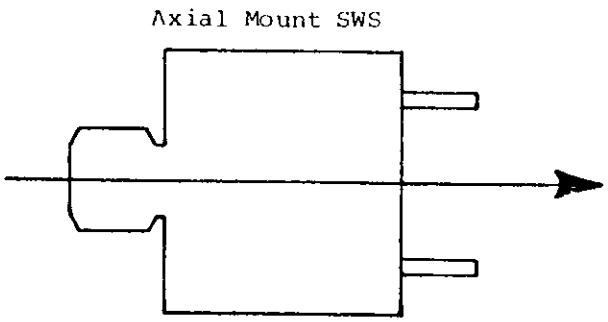

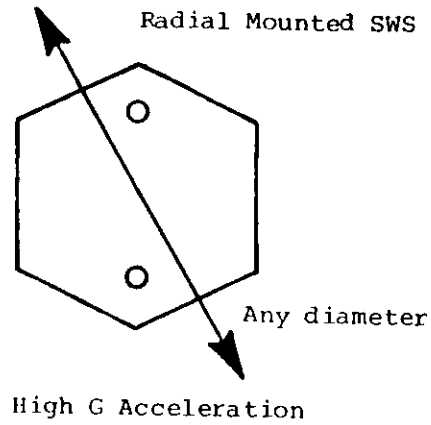

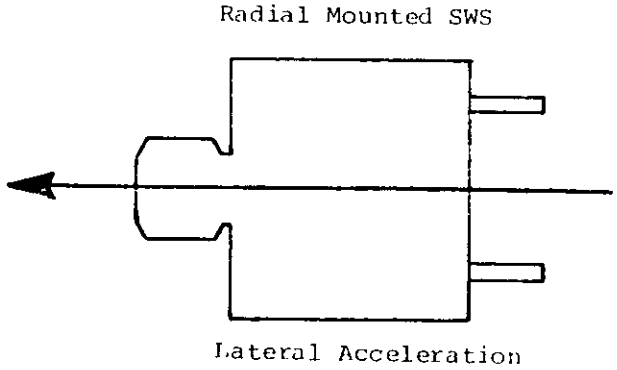

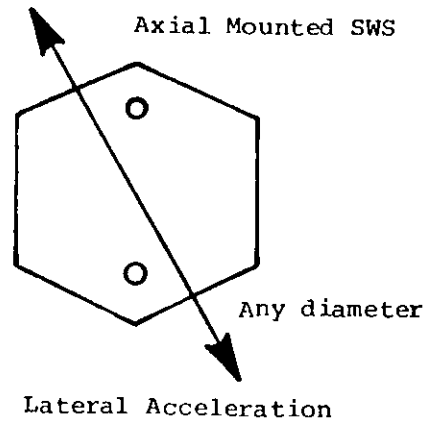


FIGURE 1 - Direction of Applied Acceleration

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

PAGE 9

* 5.1 Delete in it's entirety and substitute the following:

"5.1 Preservation and packaging. - Level B. Place each item in a bag in accordance with Type I, Class F, Style 1 of MIL-B-117 and heat seal bag. Place bagged items in a partitioned 275 pound test corrugated fiberboard carton. One bagged item per partition cell. Seal the carton with pressure sensitive case sealing tape in accordance with (PPP-T-60) or water remoistenable reinforced gummed case sealing tape in accordance with (PPP-T-45)."

* 5.2 Delete in its entirety and substitute the following:

"5.2 Packing. Cartons as described in 5.1 shall be labled and shipped on individual basis. Unitizing of two or more cartons for shipment is not allowed except in overpack cartons, (optional). Overpack, if used, shall consist of 200 pound test corrugated boxes; voids in overpack to be filled with anti-static cushion dunnage. Overpack cartons shall be sealed with PPP-T-60 or PPP-T-45 case sealing tape. Gross shipping weight shall not exceed 65 pounds per carton."

PAGE 12

Major 105, Requirements: Add to requirement paragraph "Dwg. 9307240".

Major 106, Requirements: Add to requirement paragraph "Dwg. 9307240".

PAGE 16

Major 105, Requirements: Delete "Dwg. 9302271" and substitute "Dwg. 9307240".

Major 106, Requirements: Delete "Dwg. 9302271" and substitute "Dwg. 9307240".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1390-A428)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.